


## Appendix H – Preliminary Buffer Prototype Railcar Deliverables


**APPENDIX H-1**  
**BUFFER RAILCAR PRELIMINARY FABRICATION DRAWINGS**

Appendix H-1.1 General Arrangement




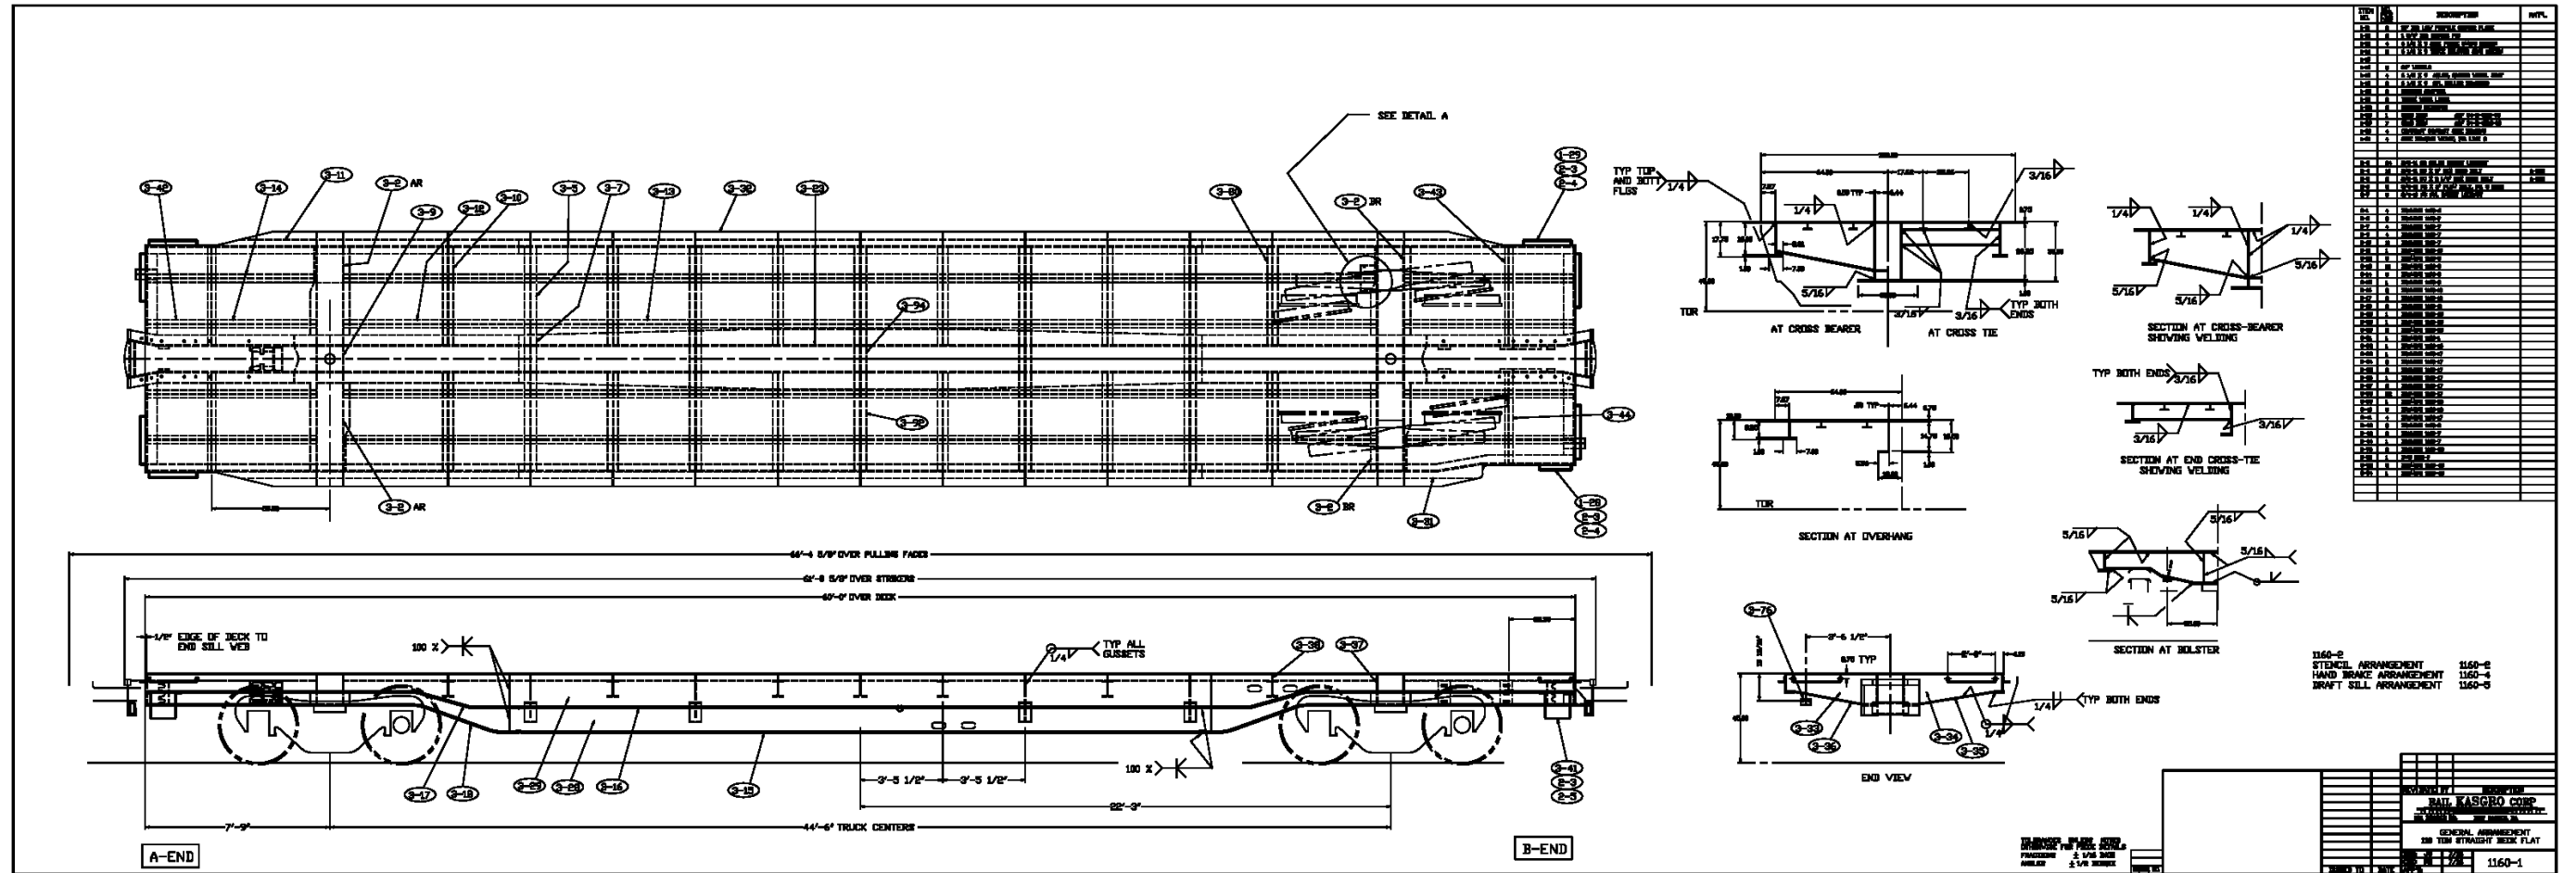


Appendix H-1.3 Stencil Arrangement

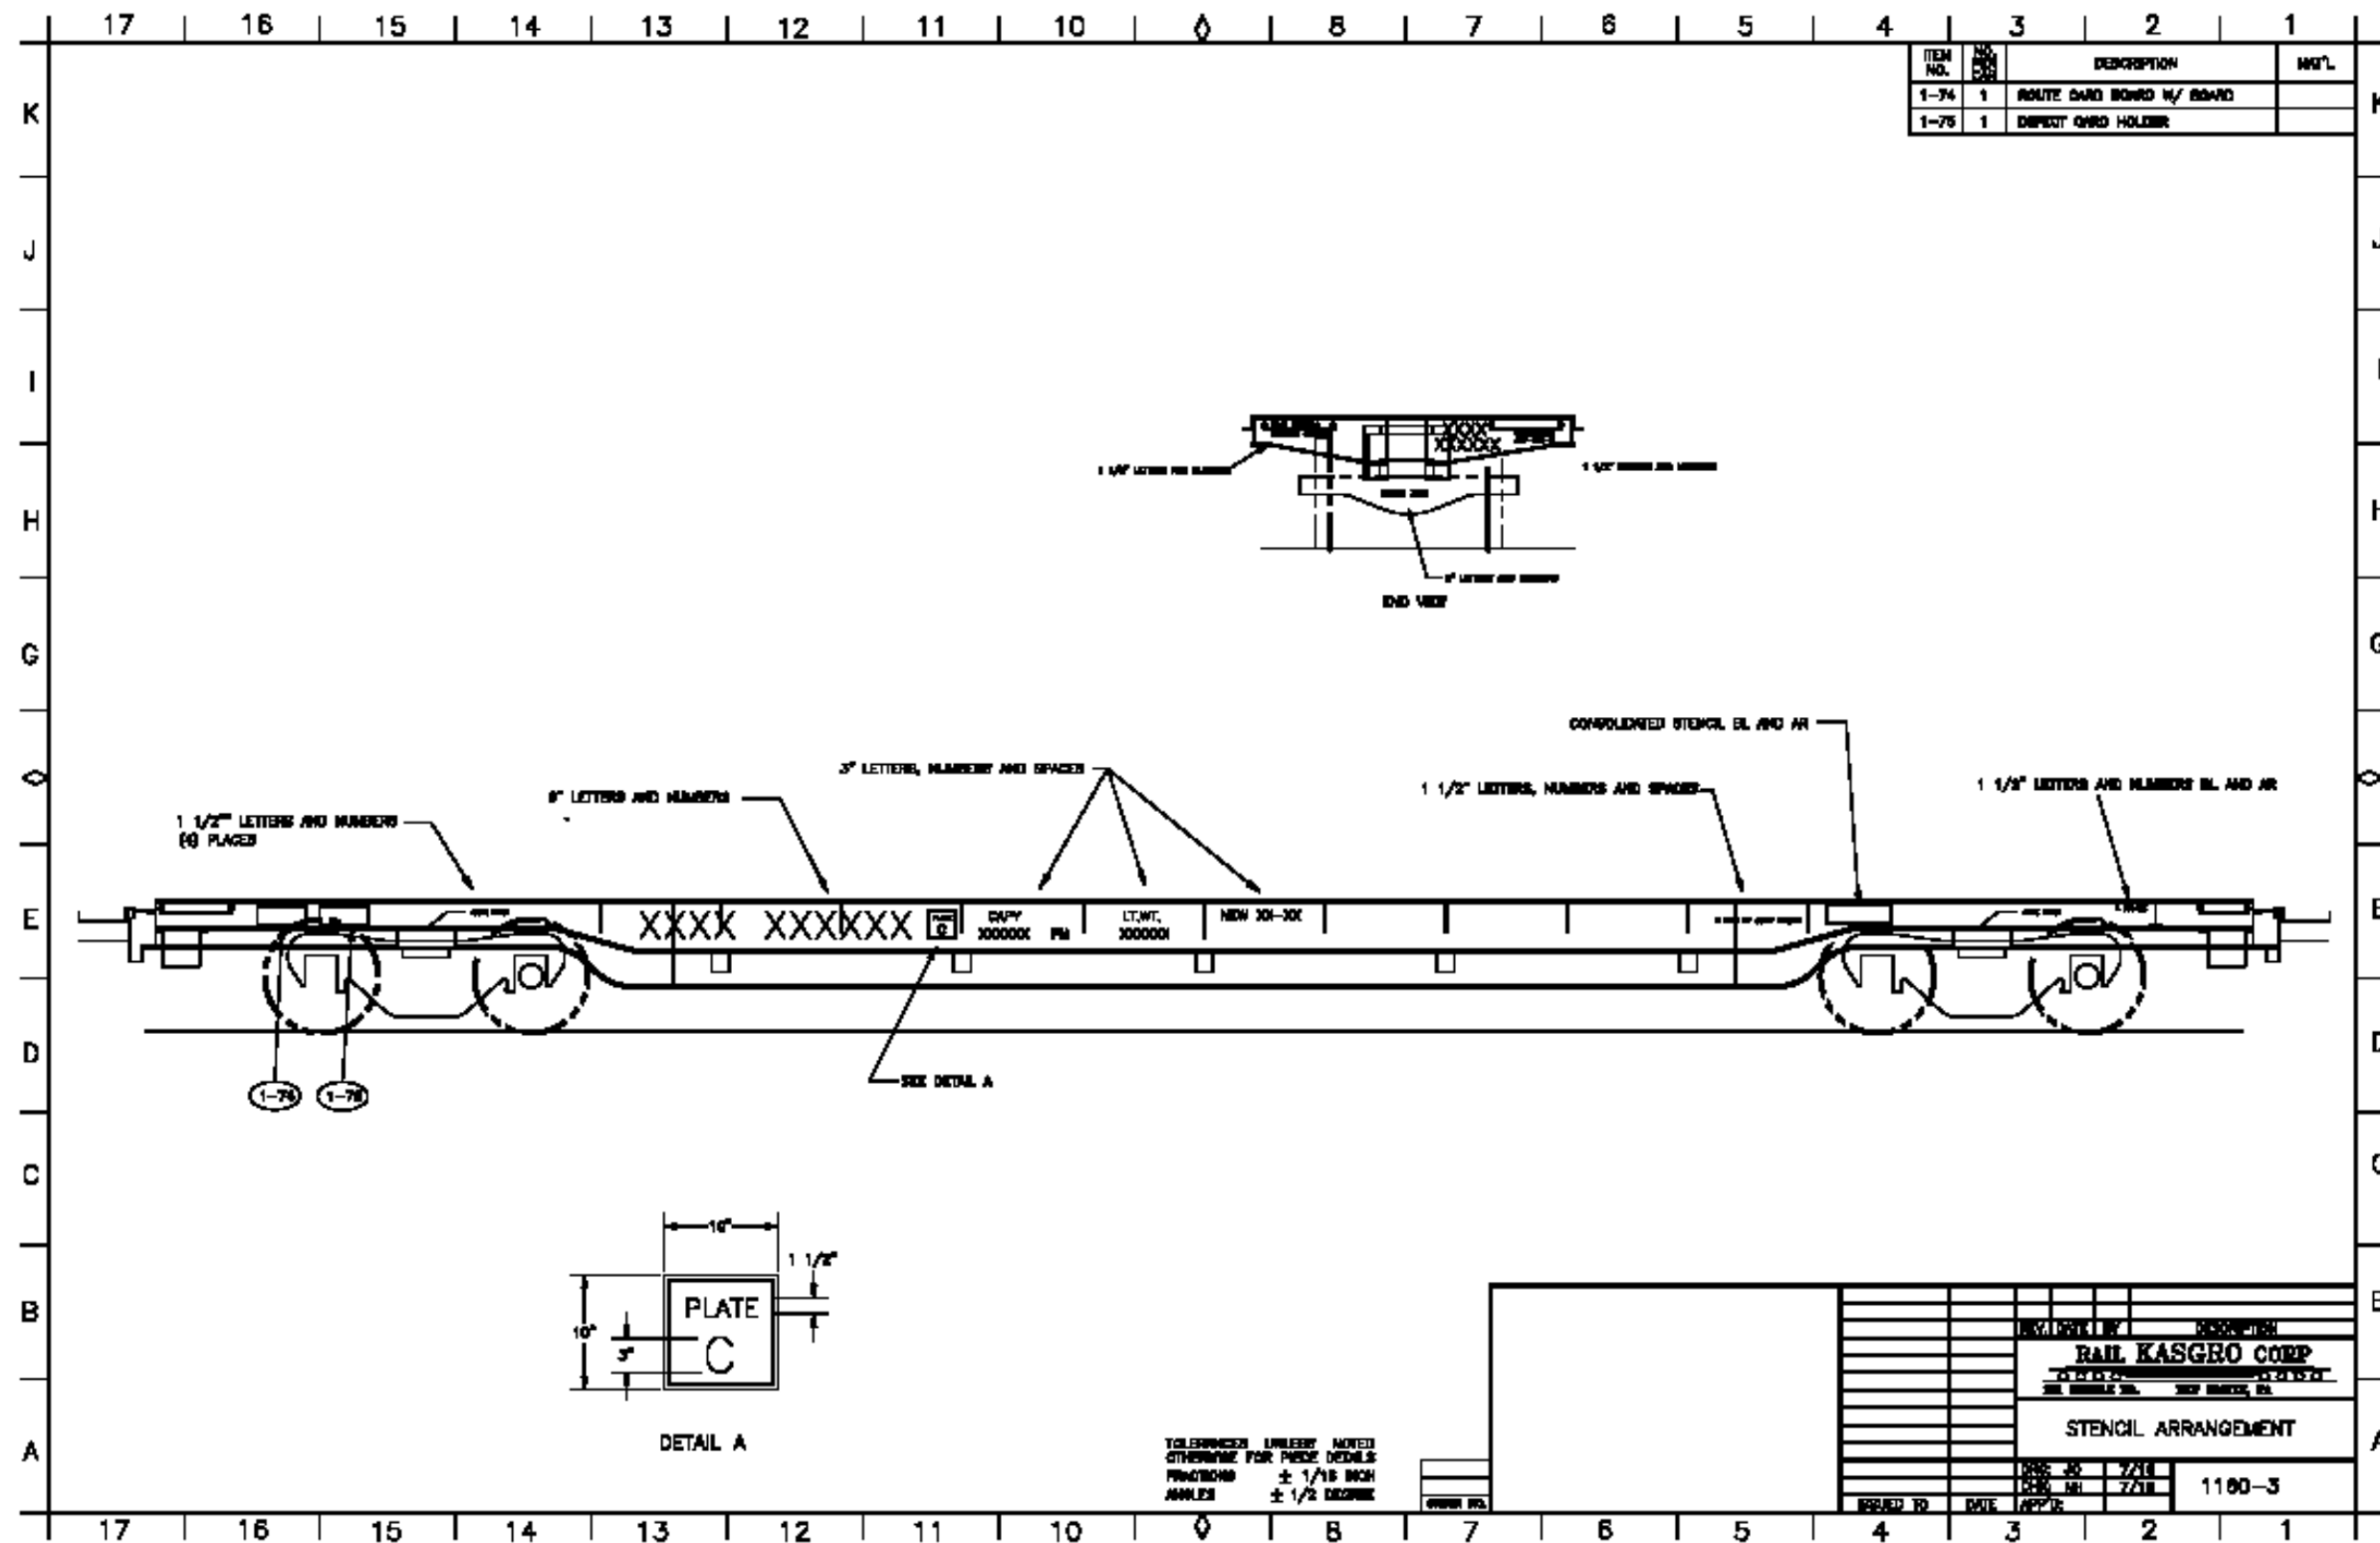

Appendix H-1.4 Hand Brake Arrangement

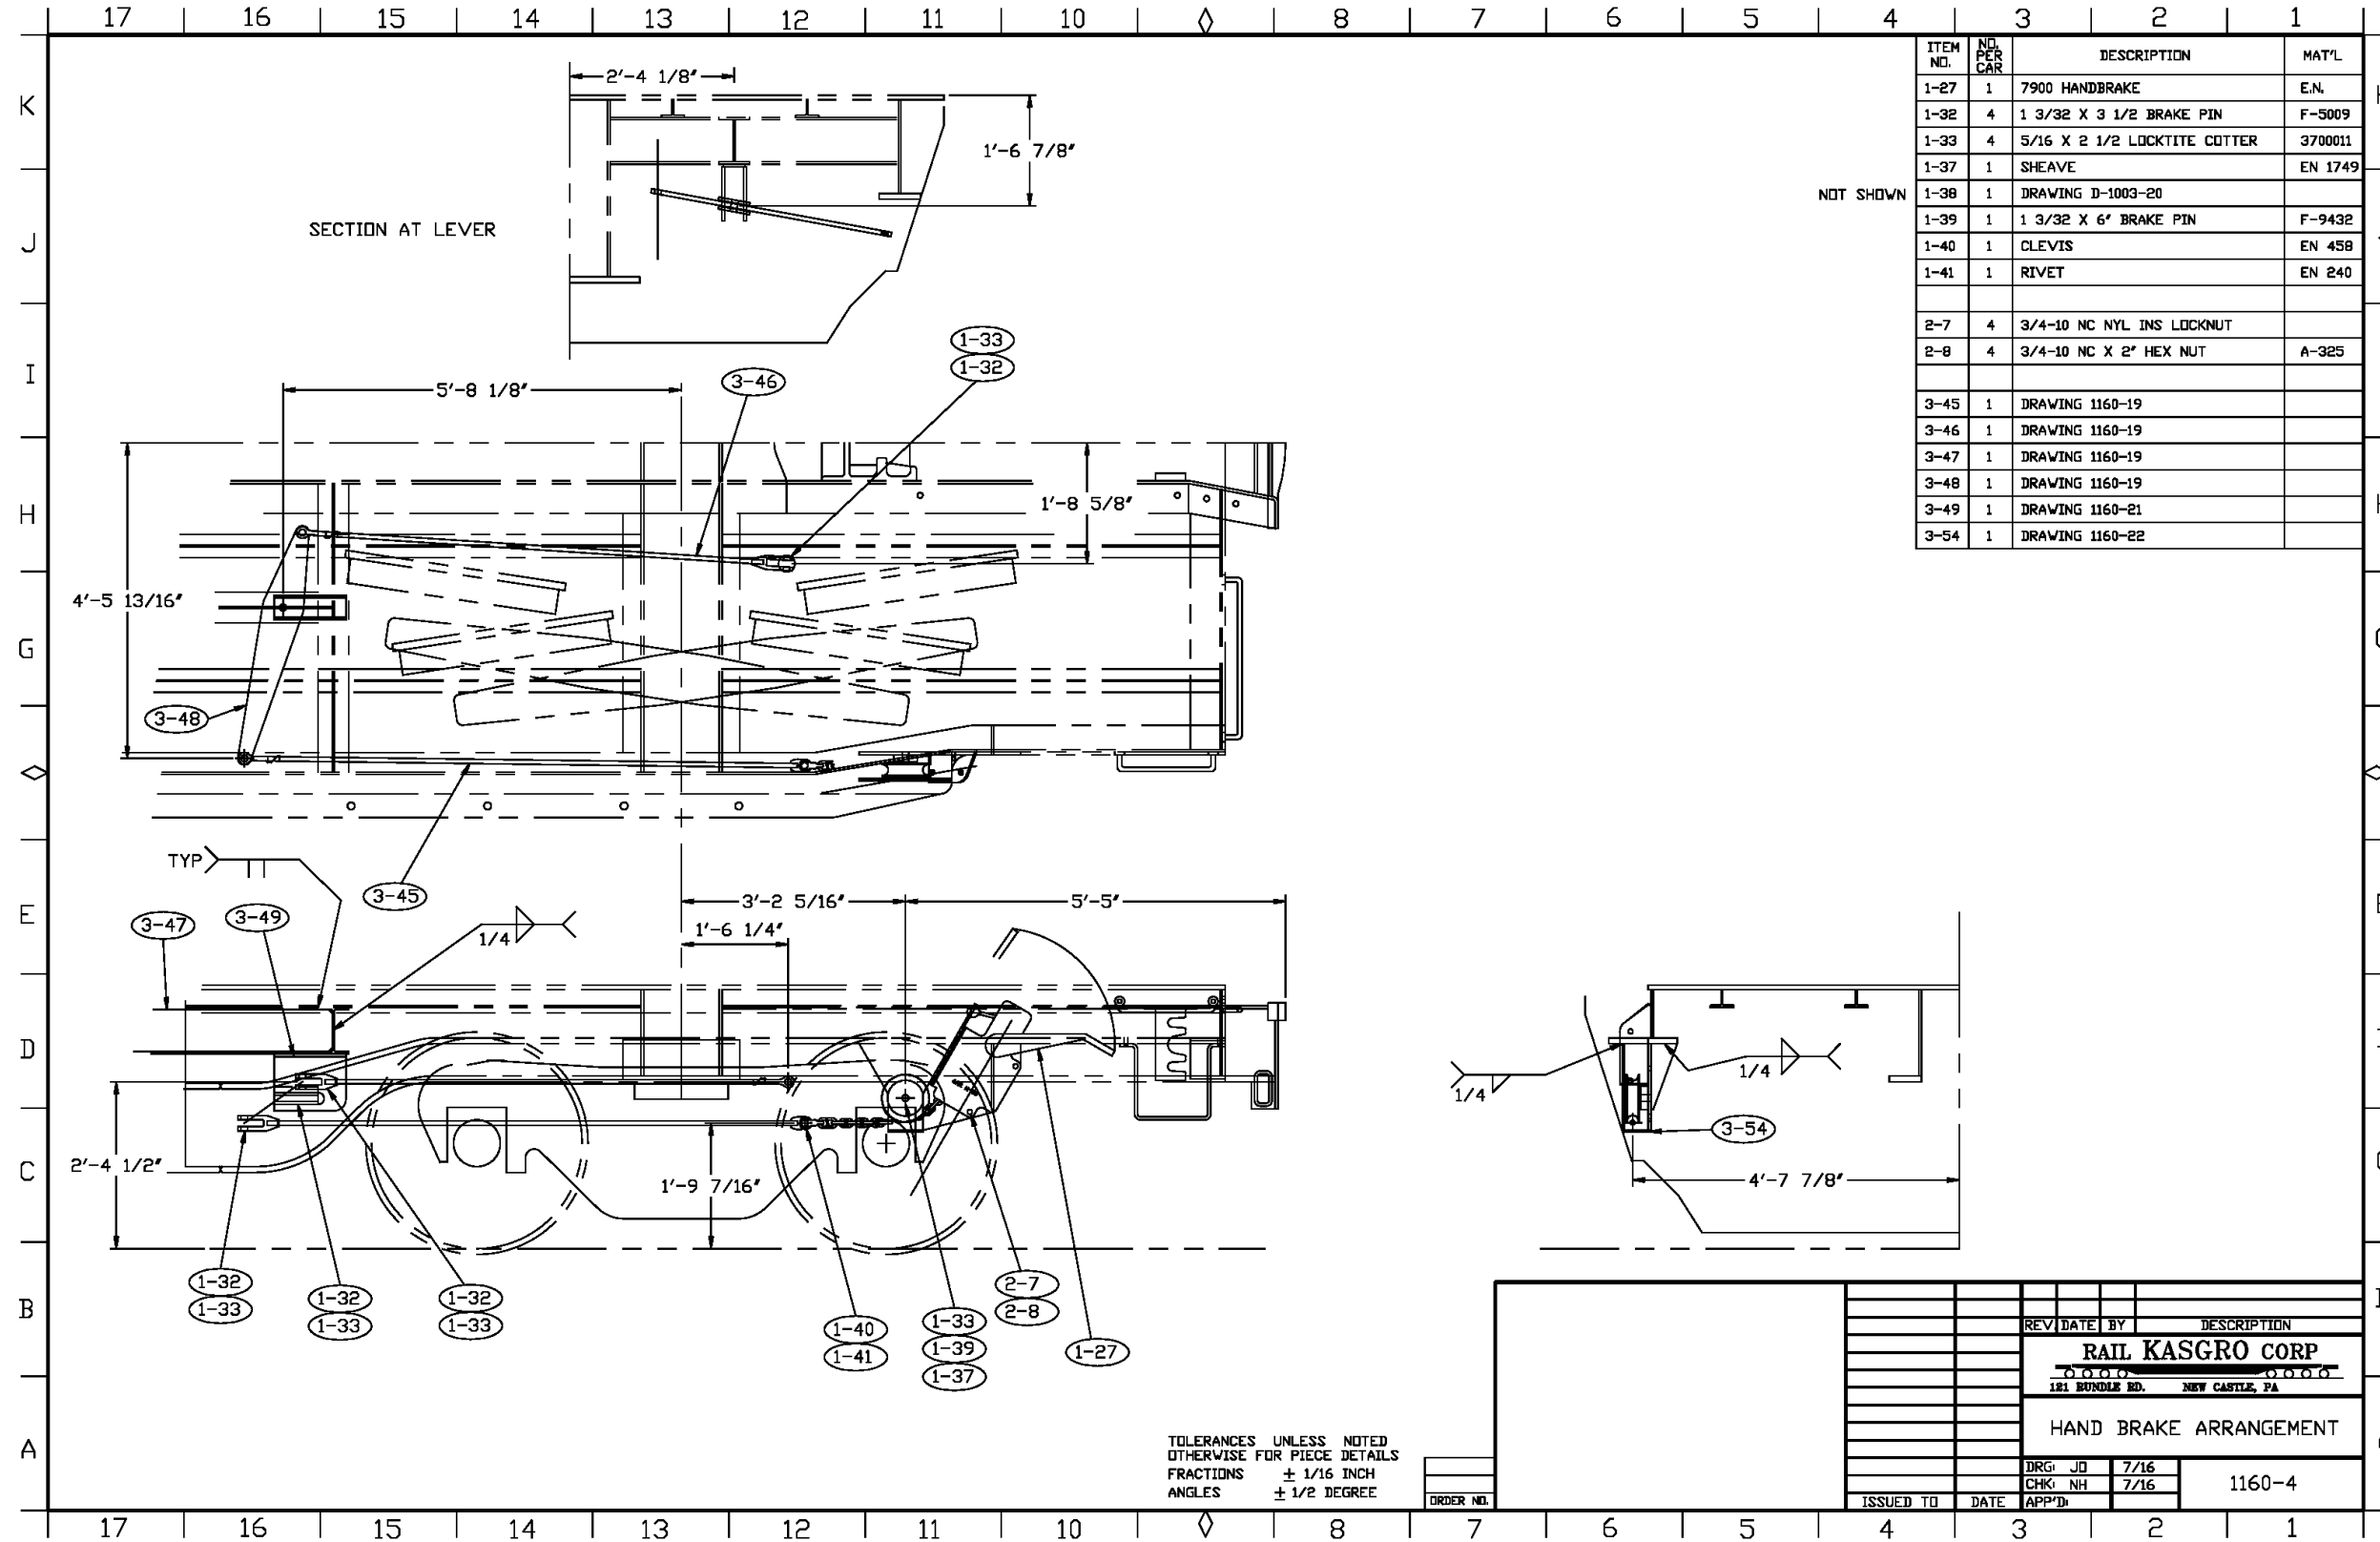


Appendix H-1.5 Draft Sill Details

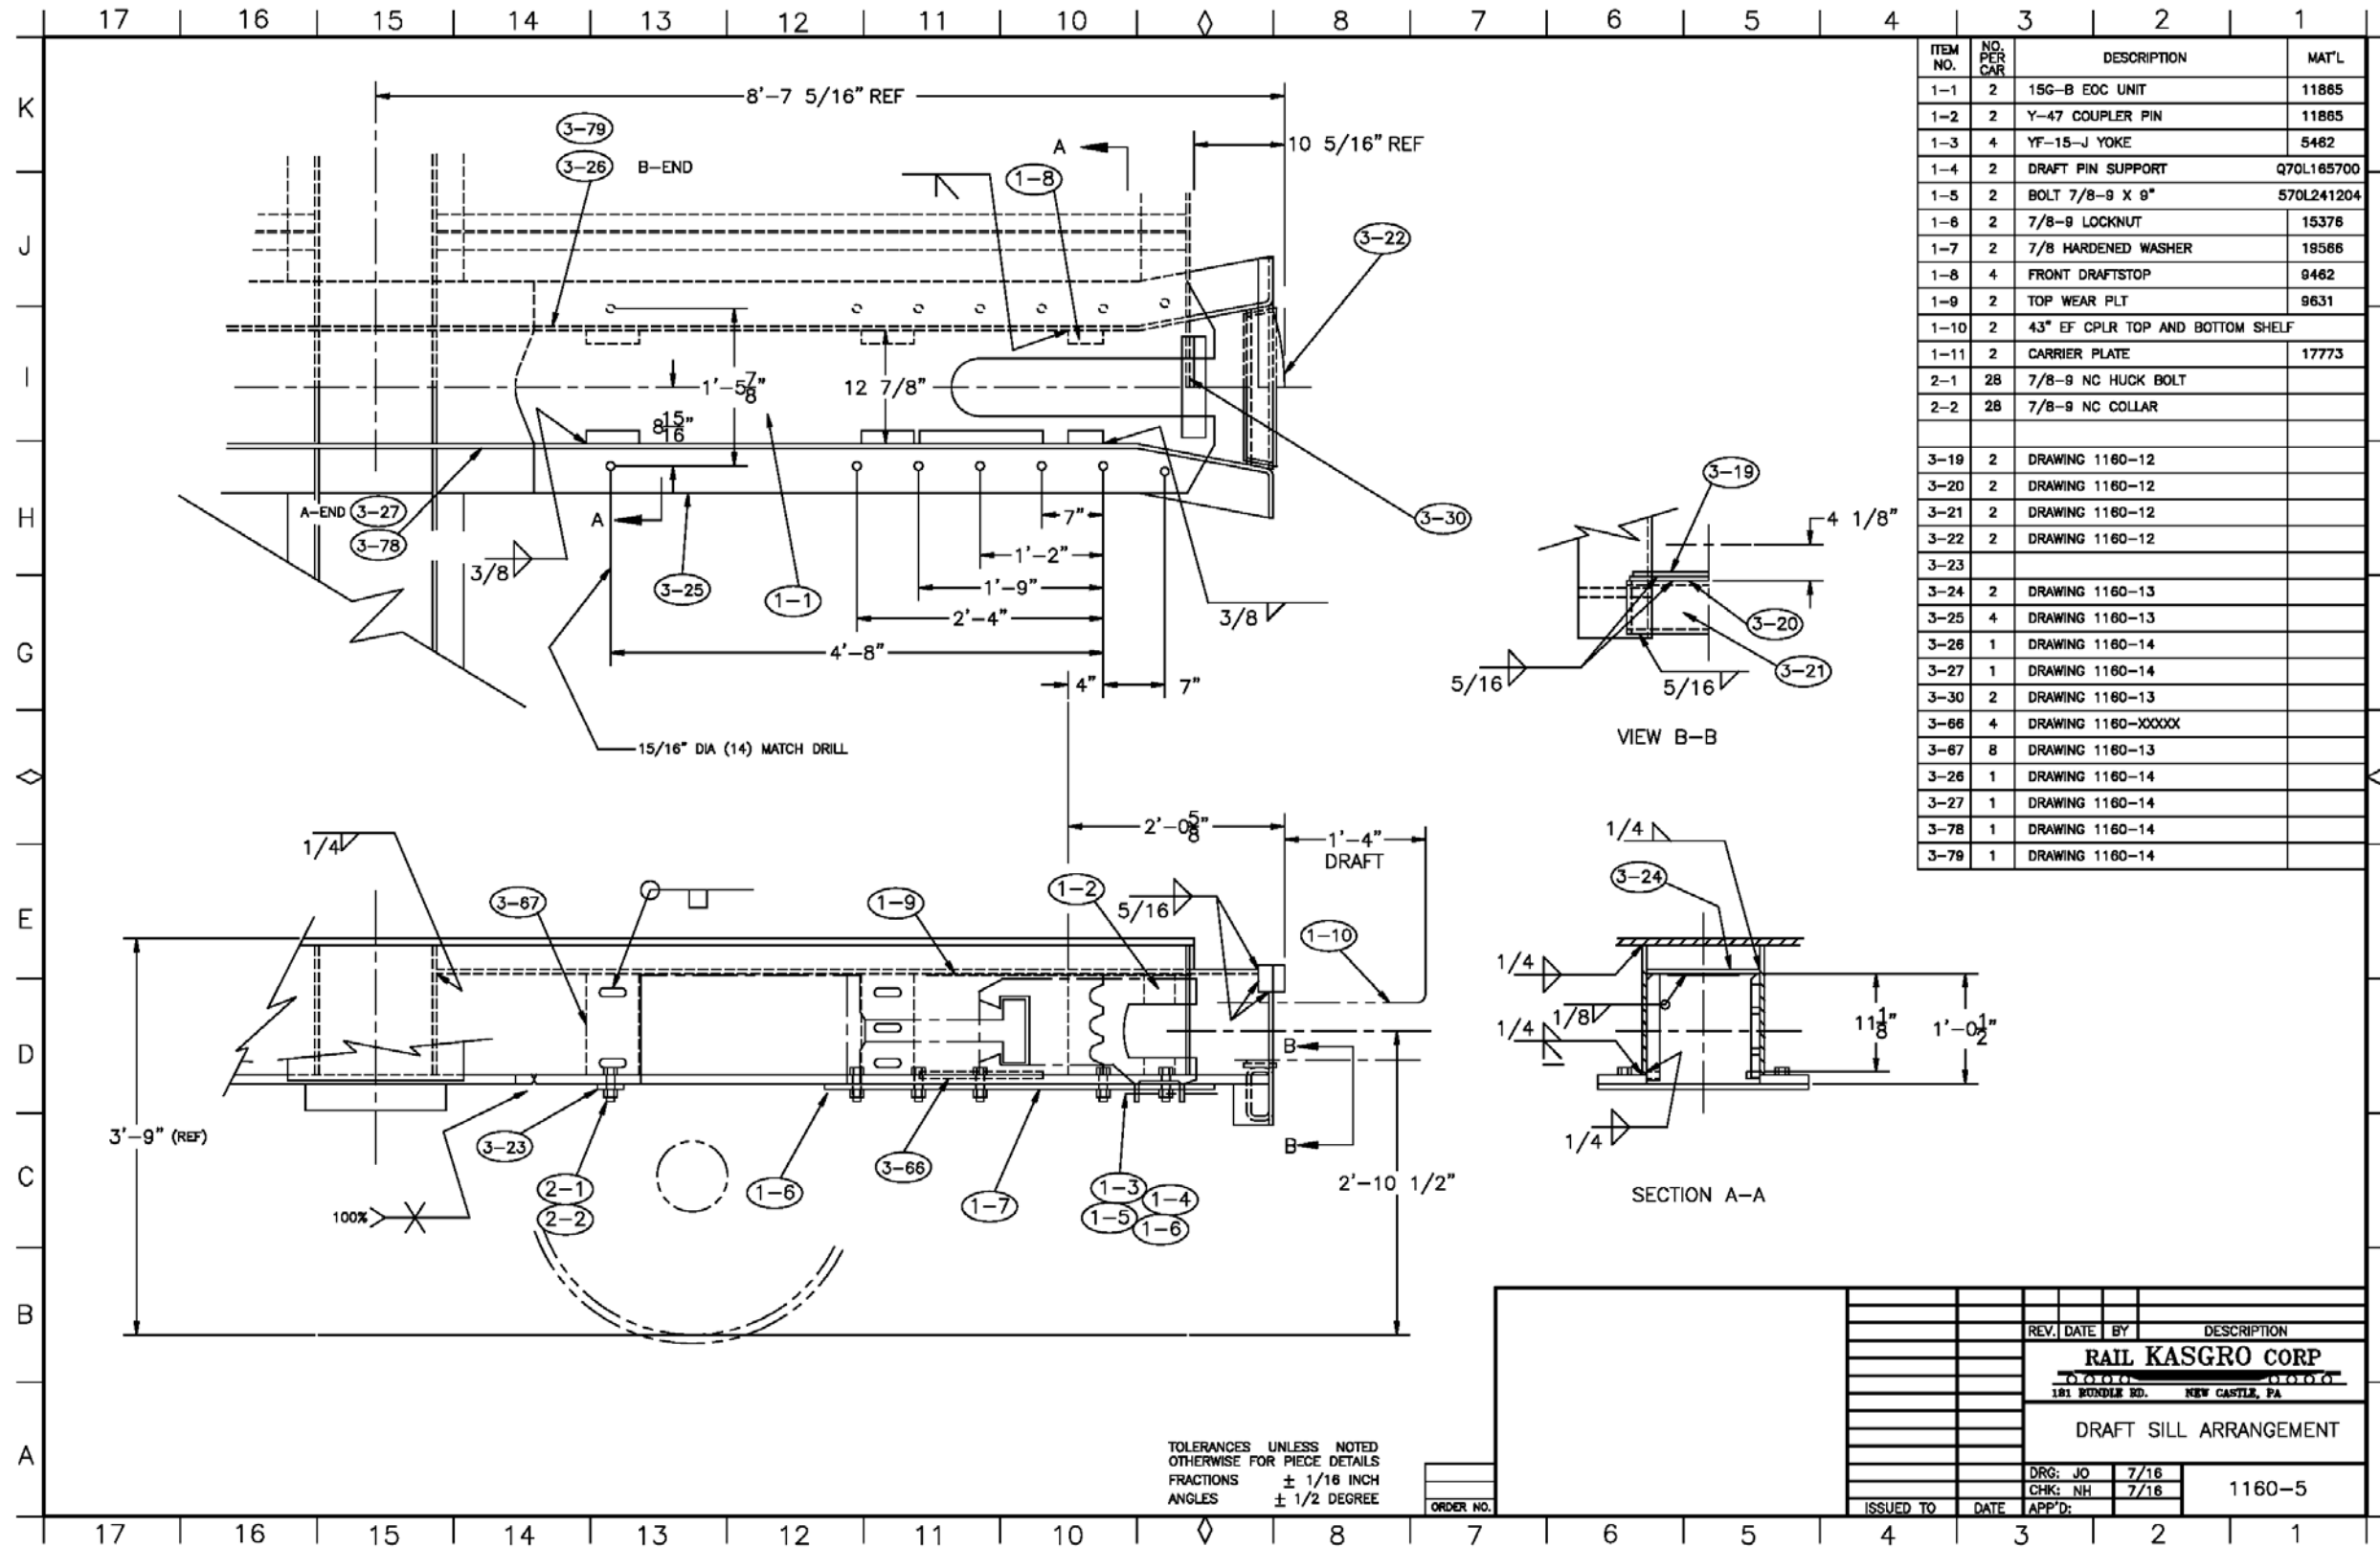


ITEM NO.	NO. PER CAR	DESCRIPTION	MAT'L
1-1	2	15G-B EOC UNIT	11885
1-2	2	Y-47 COUPLER PIN	11885
1-3	4	YF-15-J YOKE	5482
1-4	2	DRAFT PIN SUPPORT	Q70L165700
1-5	2	BOLT 7/8-9 X 9"	570L241204
1-6	2	7/8-9 LOCKNUT	15376
1-7	2	7/8 HARDENED WASHER	18566
1-8	4	FRONT DRAFTSTOP	8482
1-9	2	TOP WEAR PLT	8631
1-10	2	43" EF CPLR TOP AND BOTTOM SHELF	
1-11	2	CARRIER PLATE	17773
2-1	28	7/8-9 NC HUCK BOLT	
2-2	28	7/8-9 NC COLLAR	
3-19	2	DRAWING 1160-12	
3-20	2	DRAWING 1160-12	
3-21	2	DRAWING 1160-12	
3-22	2	DRAWING 1160-12	
3-23			
3-24	2	DRAWING 1160-13	
3-25	4	DRAWING 1160-13	
3-26	1	DRAWING 1160-14	
3-27	1	DRAWING 1160-14	
3-30	2	DRAWING 1160-13	
3-66	4	DRAWING 1160-XXXXX	
3-67	8	DRAWING 1160-13	
3-26	1	DRAWING 1160-14	
3-27	1	DRAWING 1160-14	
3-78	1	DRAWING 1160-14	
3-79	1	DRAWING 1160-14	


Appendix H-1.6 Bolster Assembly and Details

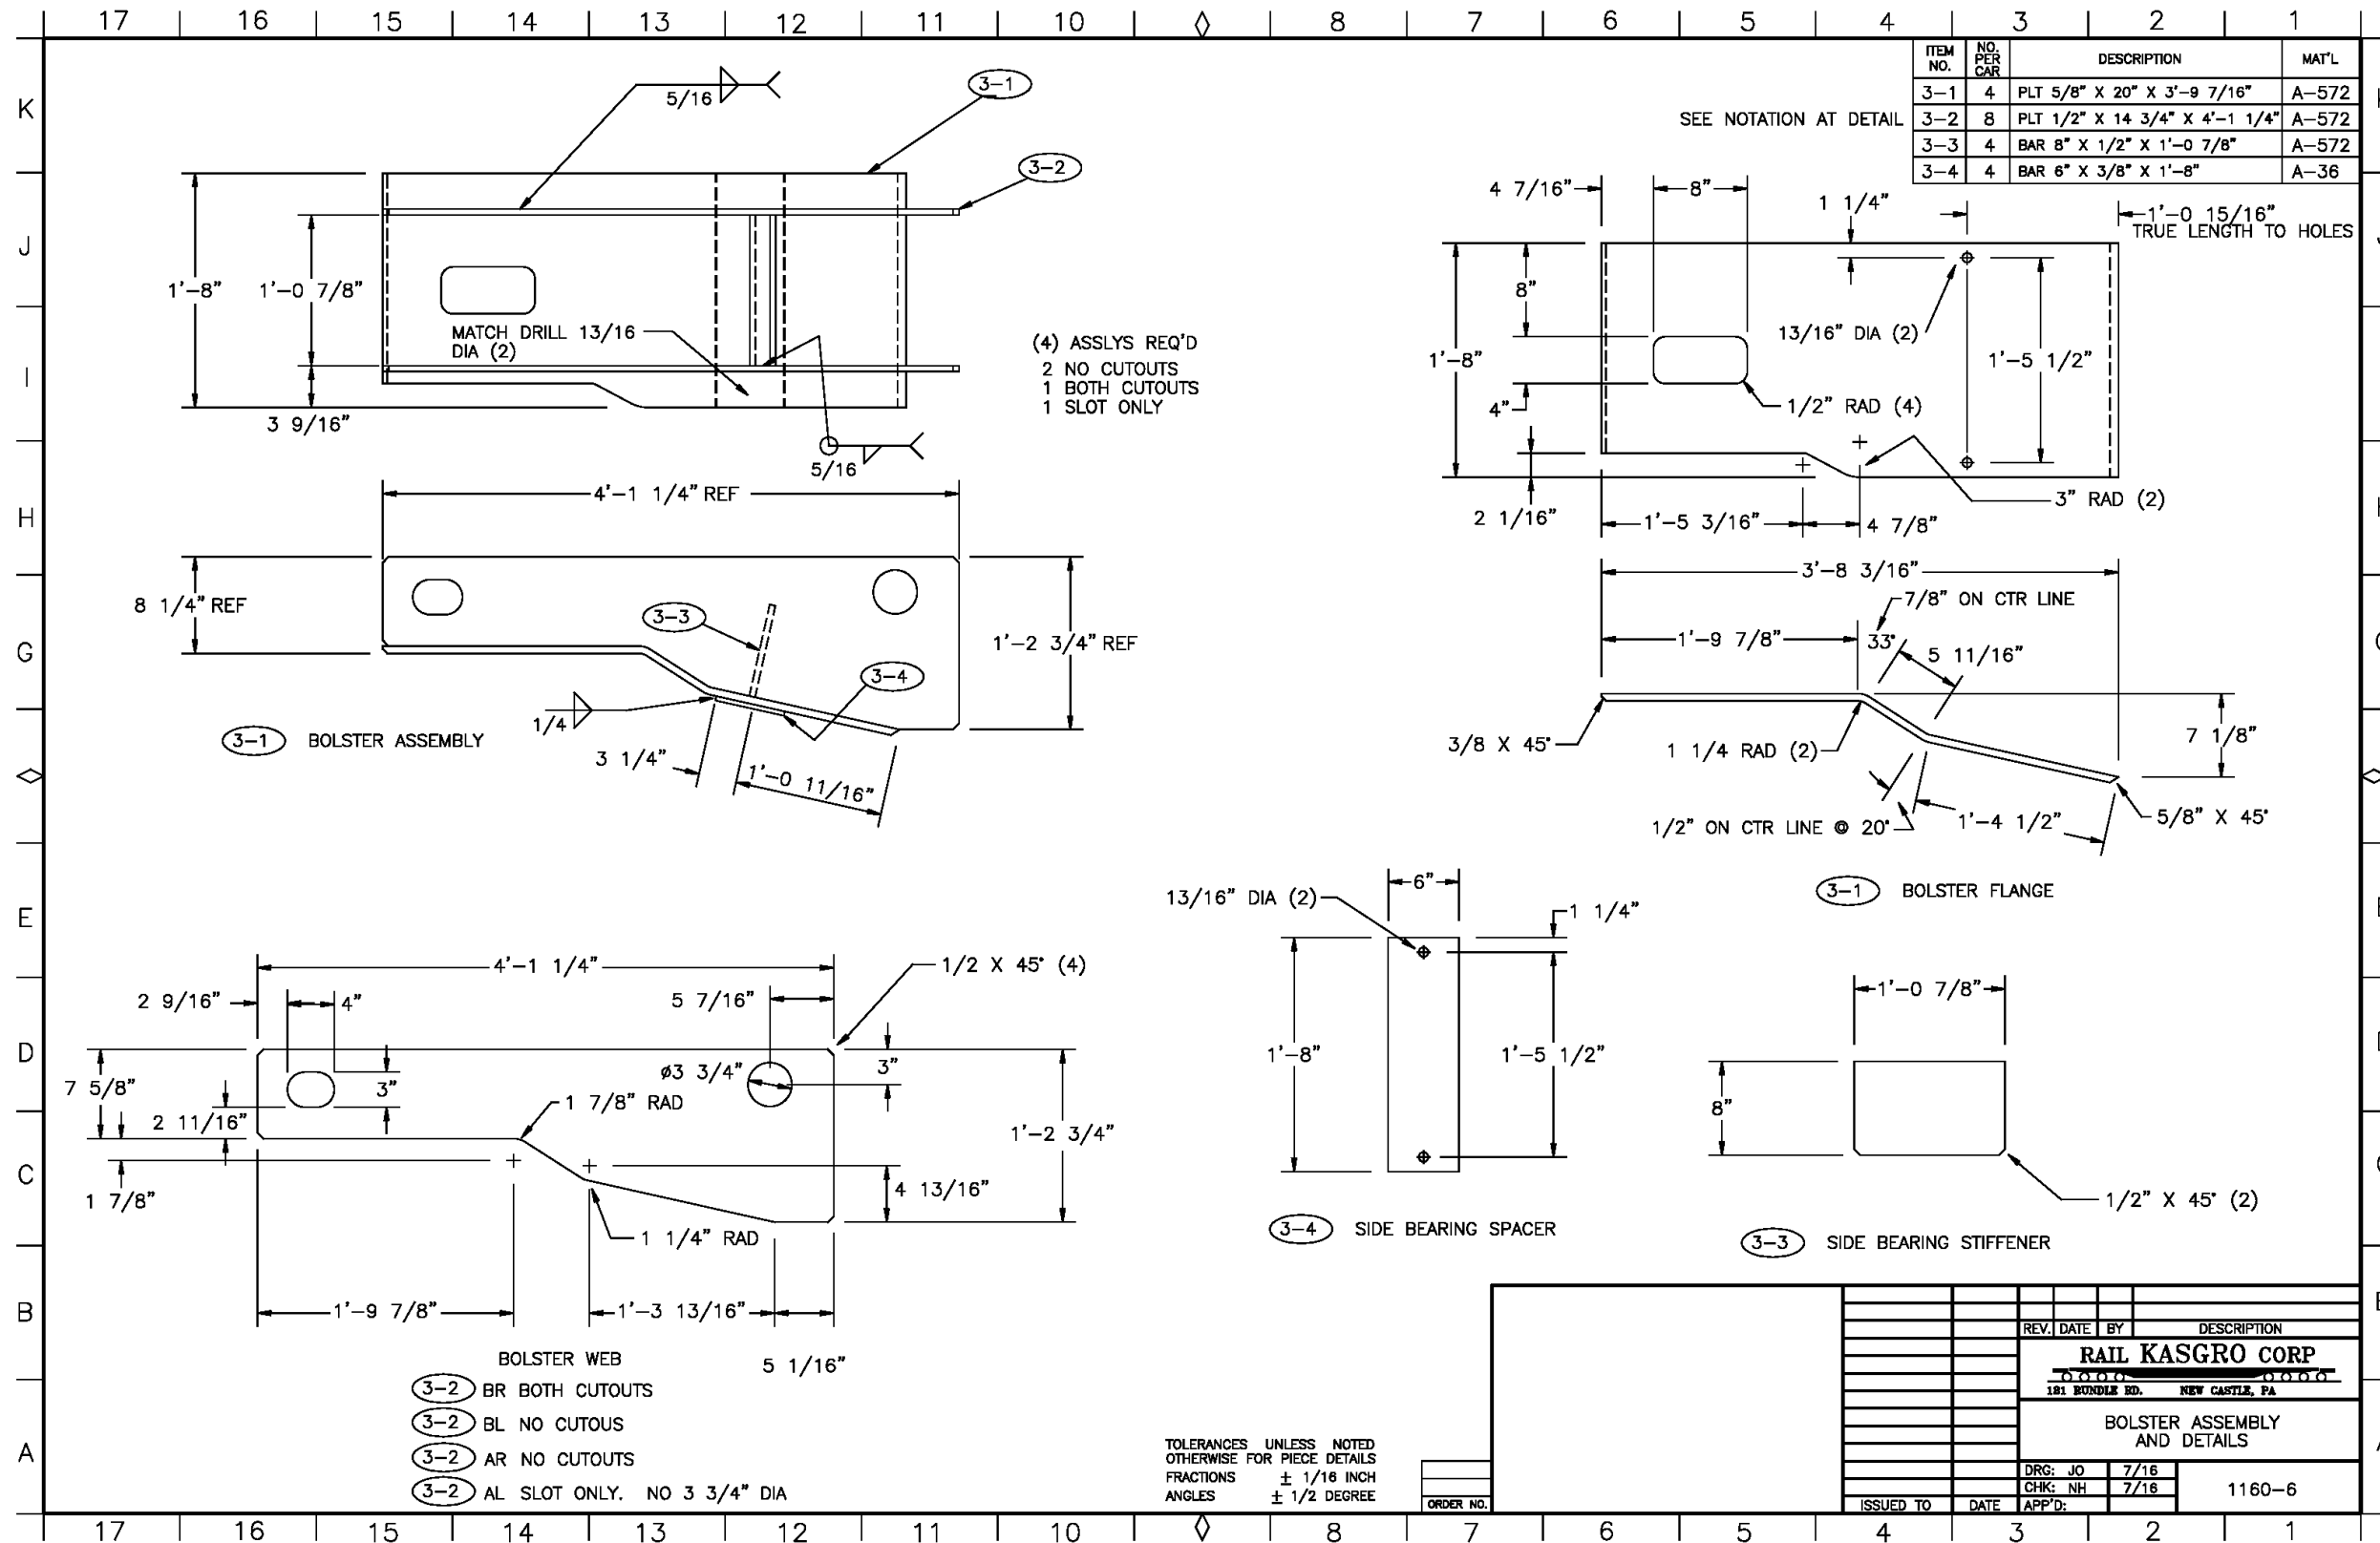

Appendix H-1.7 Steel Details

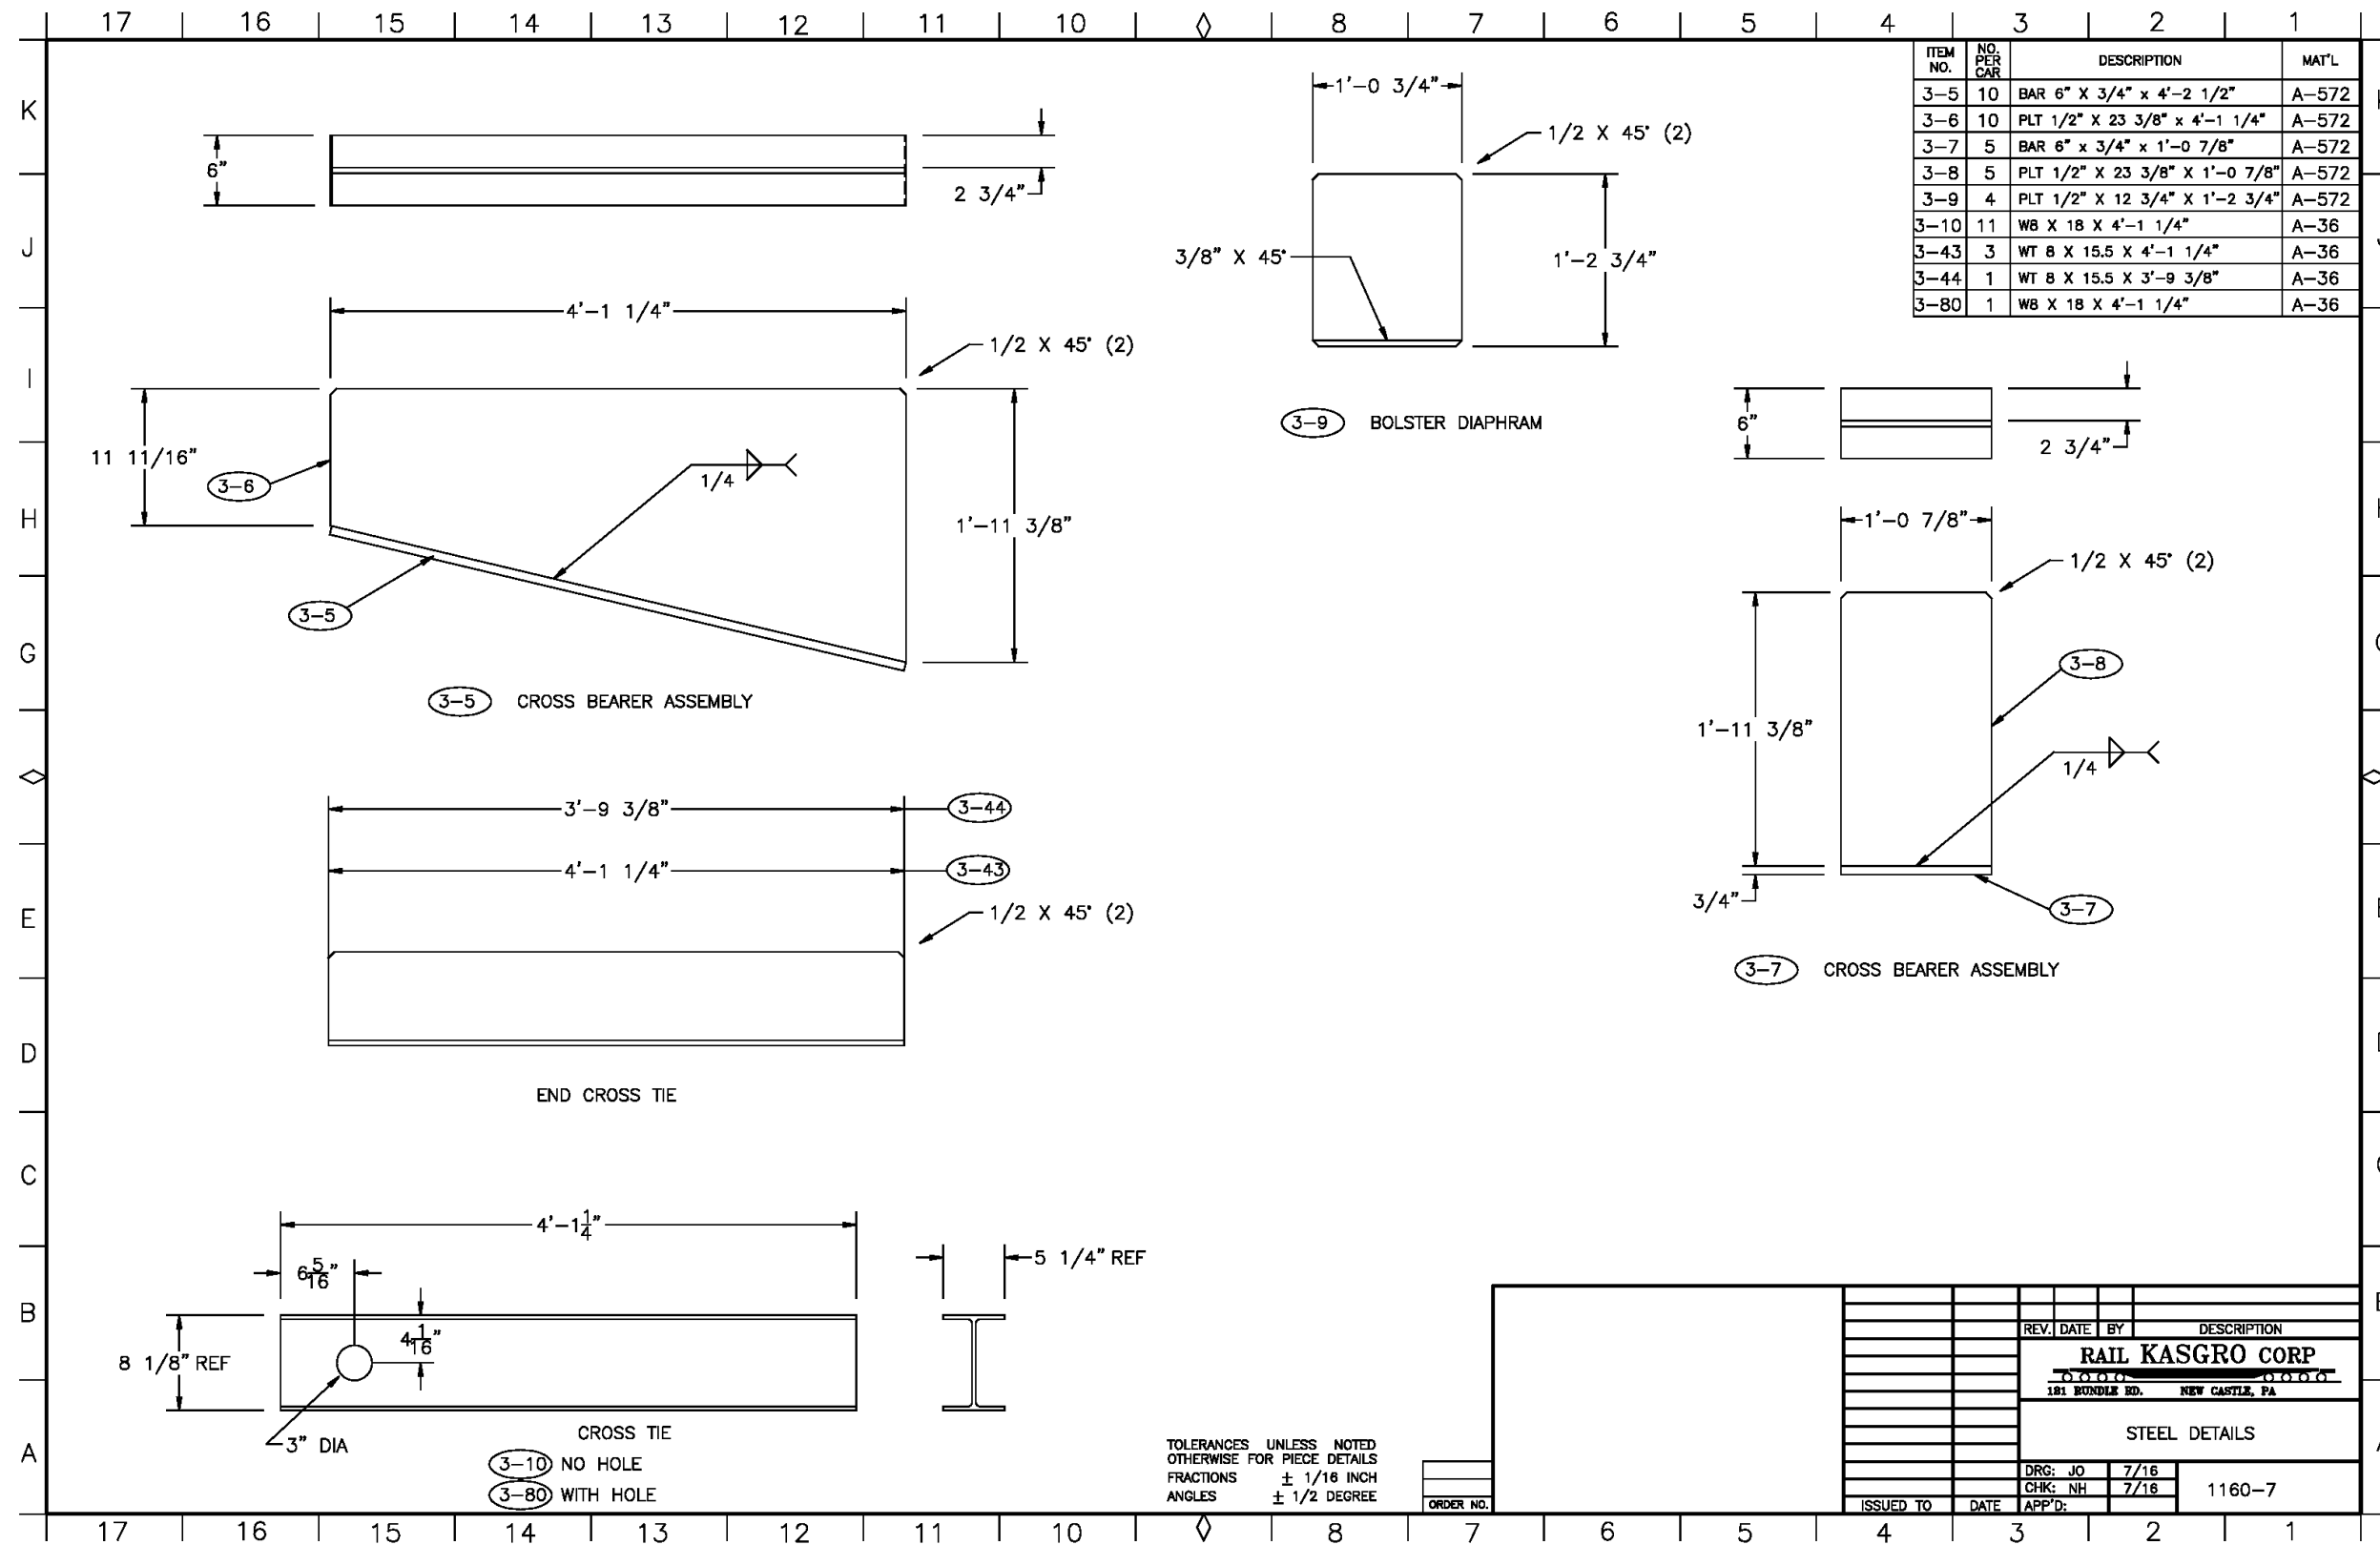


Appendix H-1.8 Steel Details

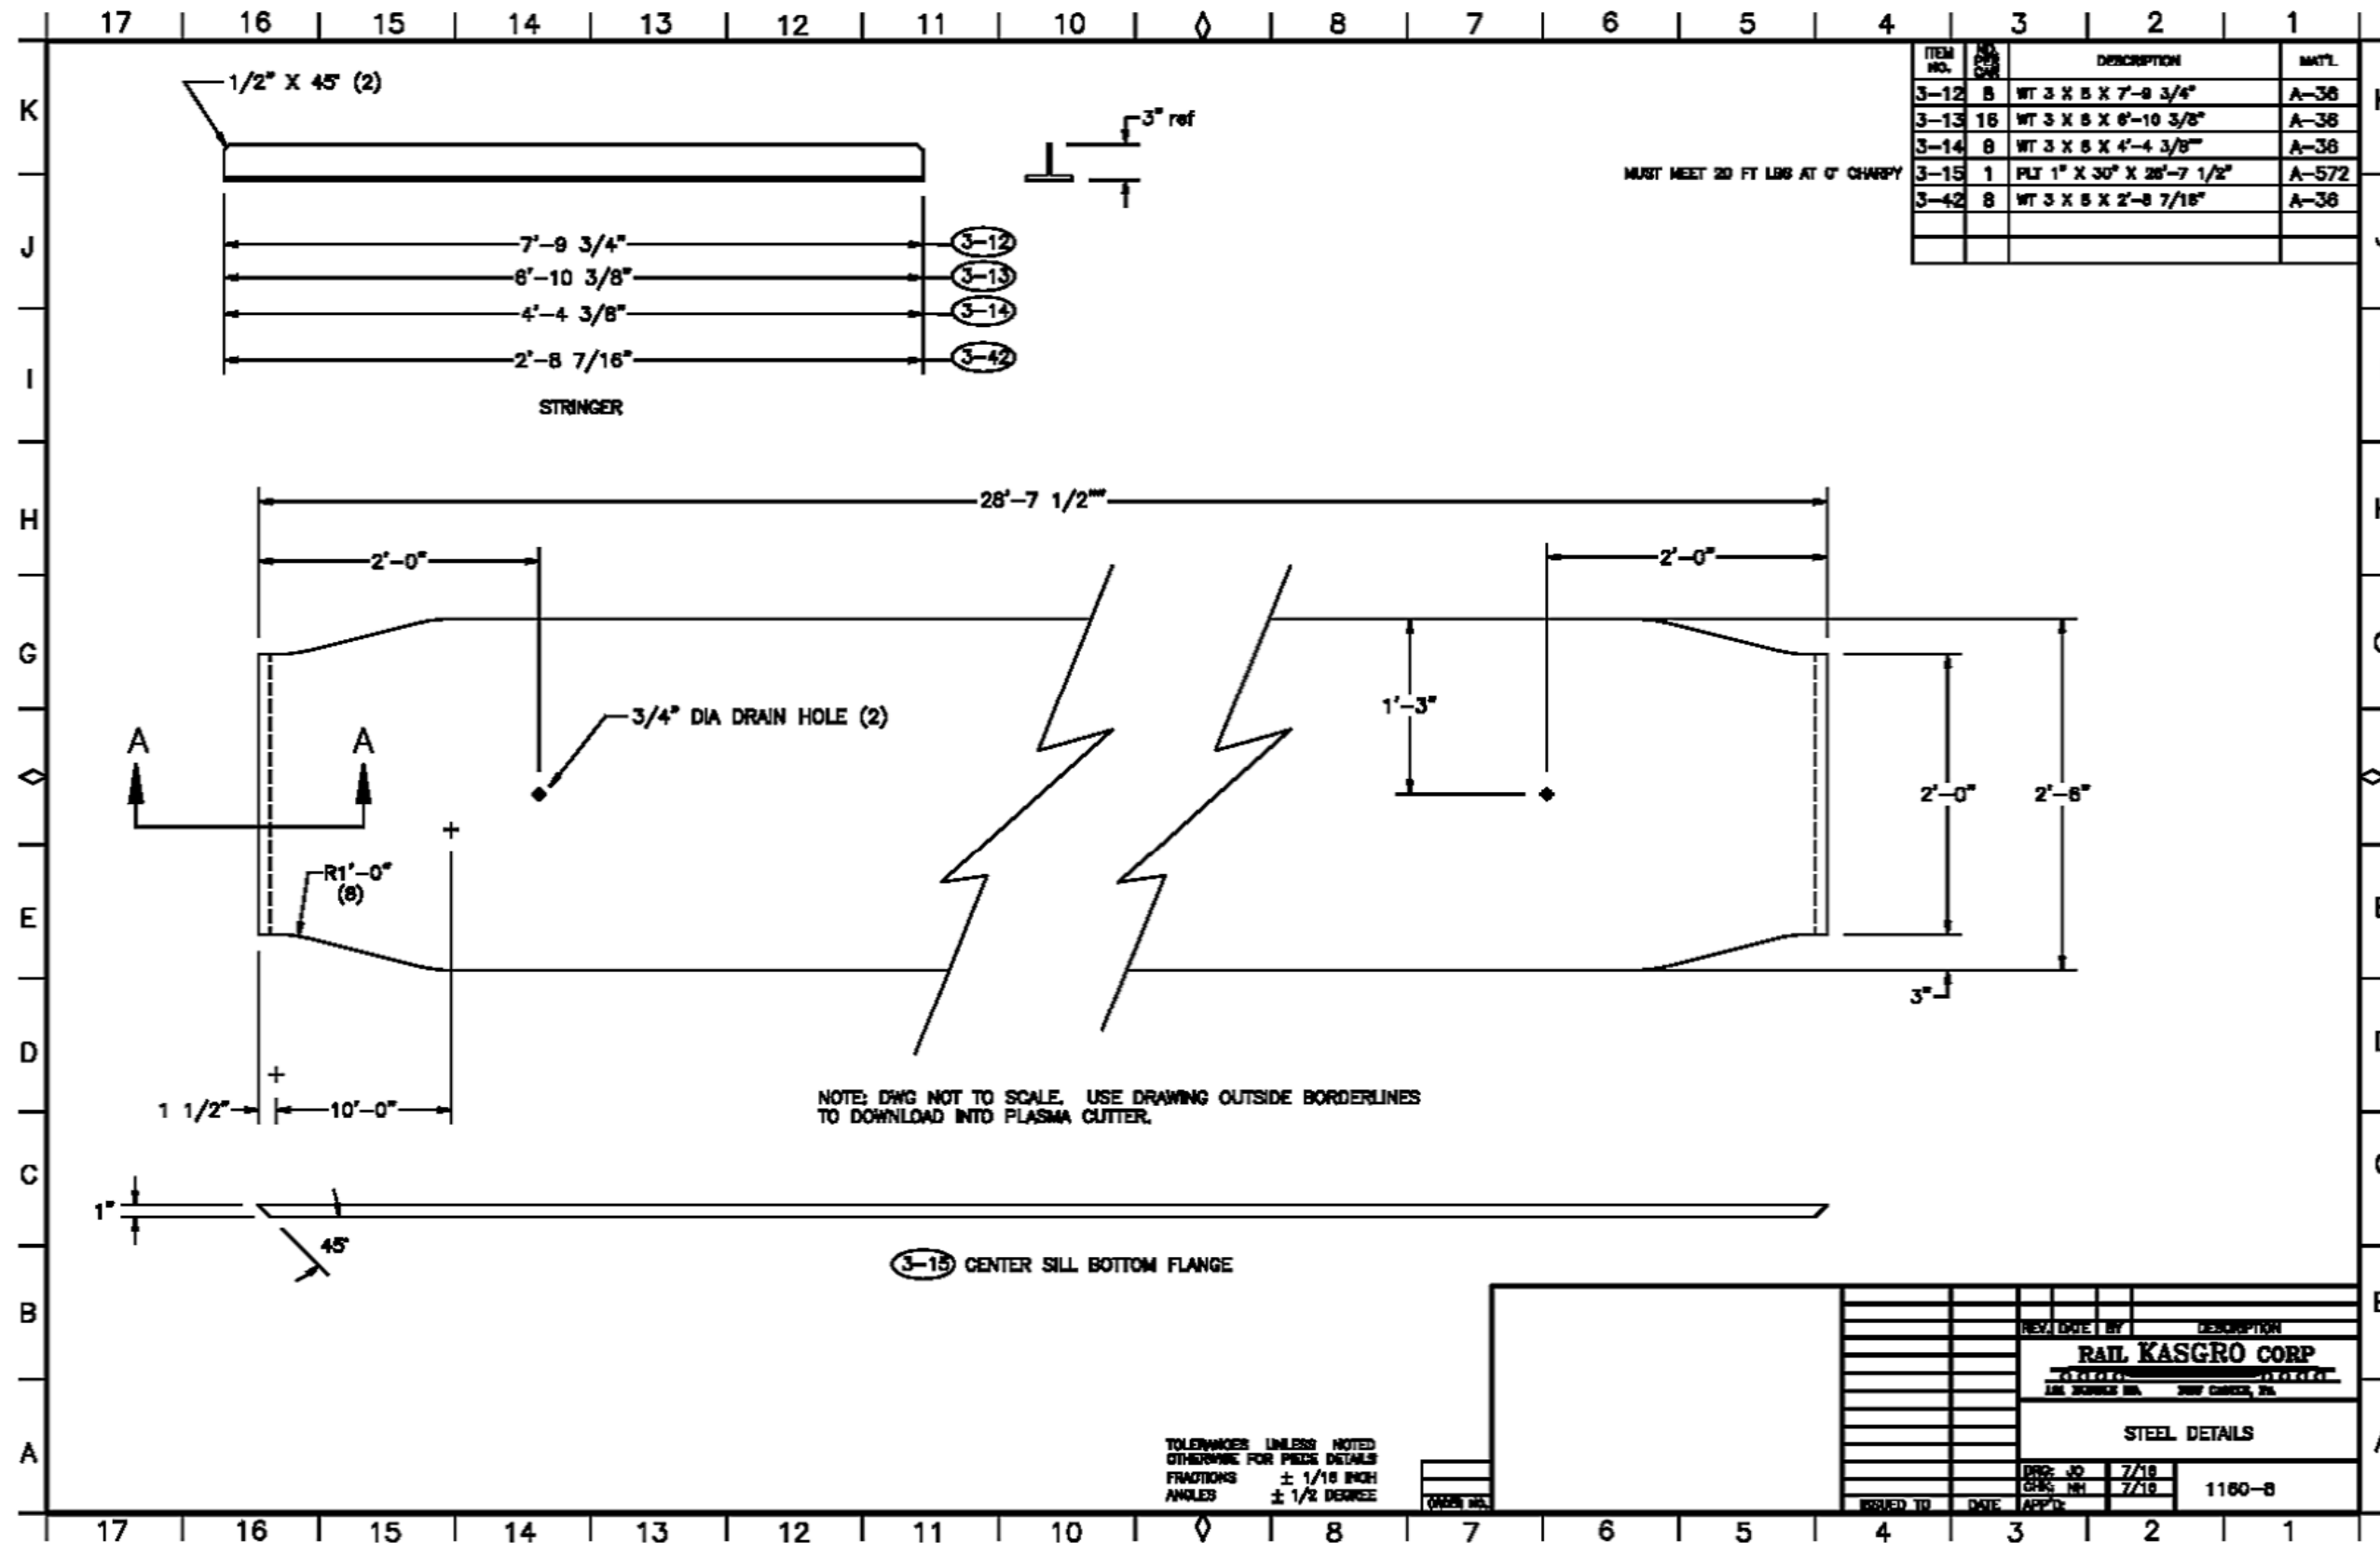


TOLERANCES UNLESS NOTED  
OTHERWISE FOR THIS DETAIL  
FRACTIONS  $\pm 1/16$  INCH  
ANGLES  $\pm 1/2$  DEGREE

REV.	DATE	BY	DESCRIPTION
<b>RAIL KASGRO CORP</b>			
STEEL DETAILS			
DRG: JO	7/18		
CHK: NH	7/18		1160-8
ISSUED TO	DATE	APP'D	


Appendix H-1.9 Steel Details

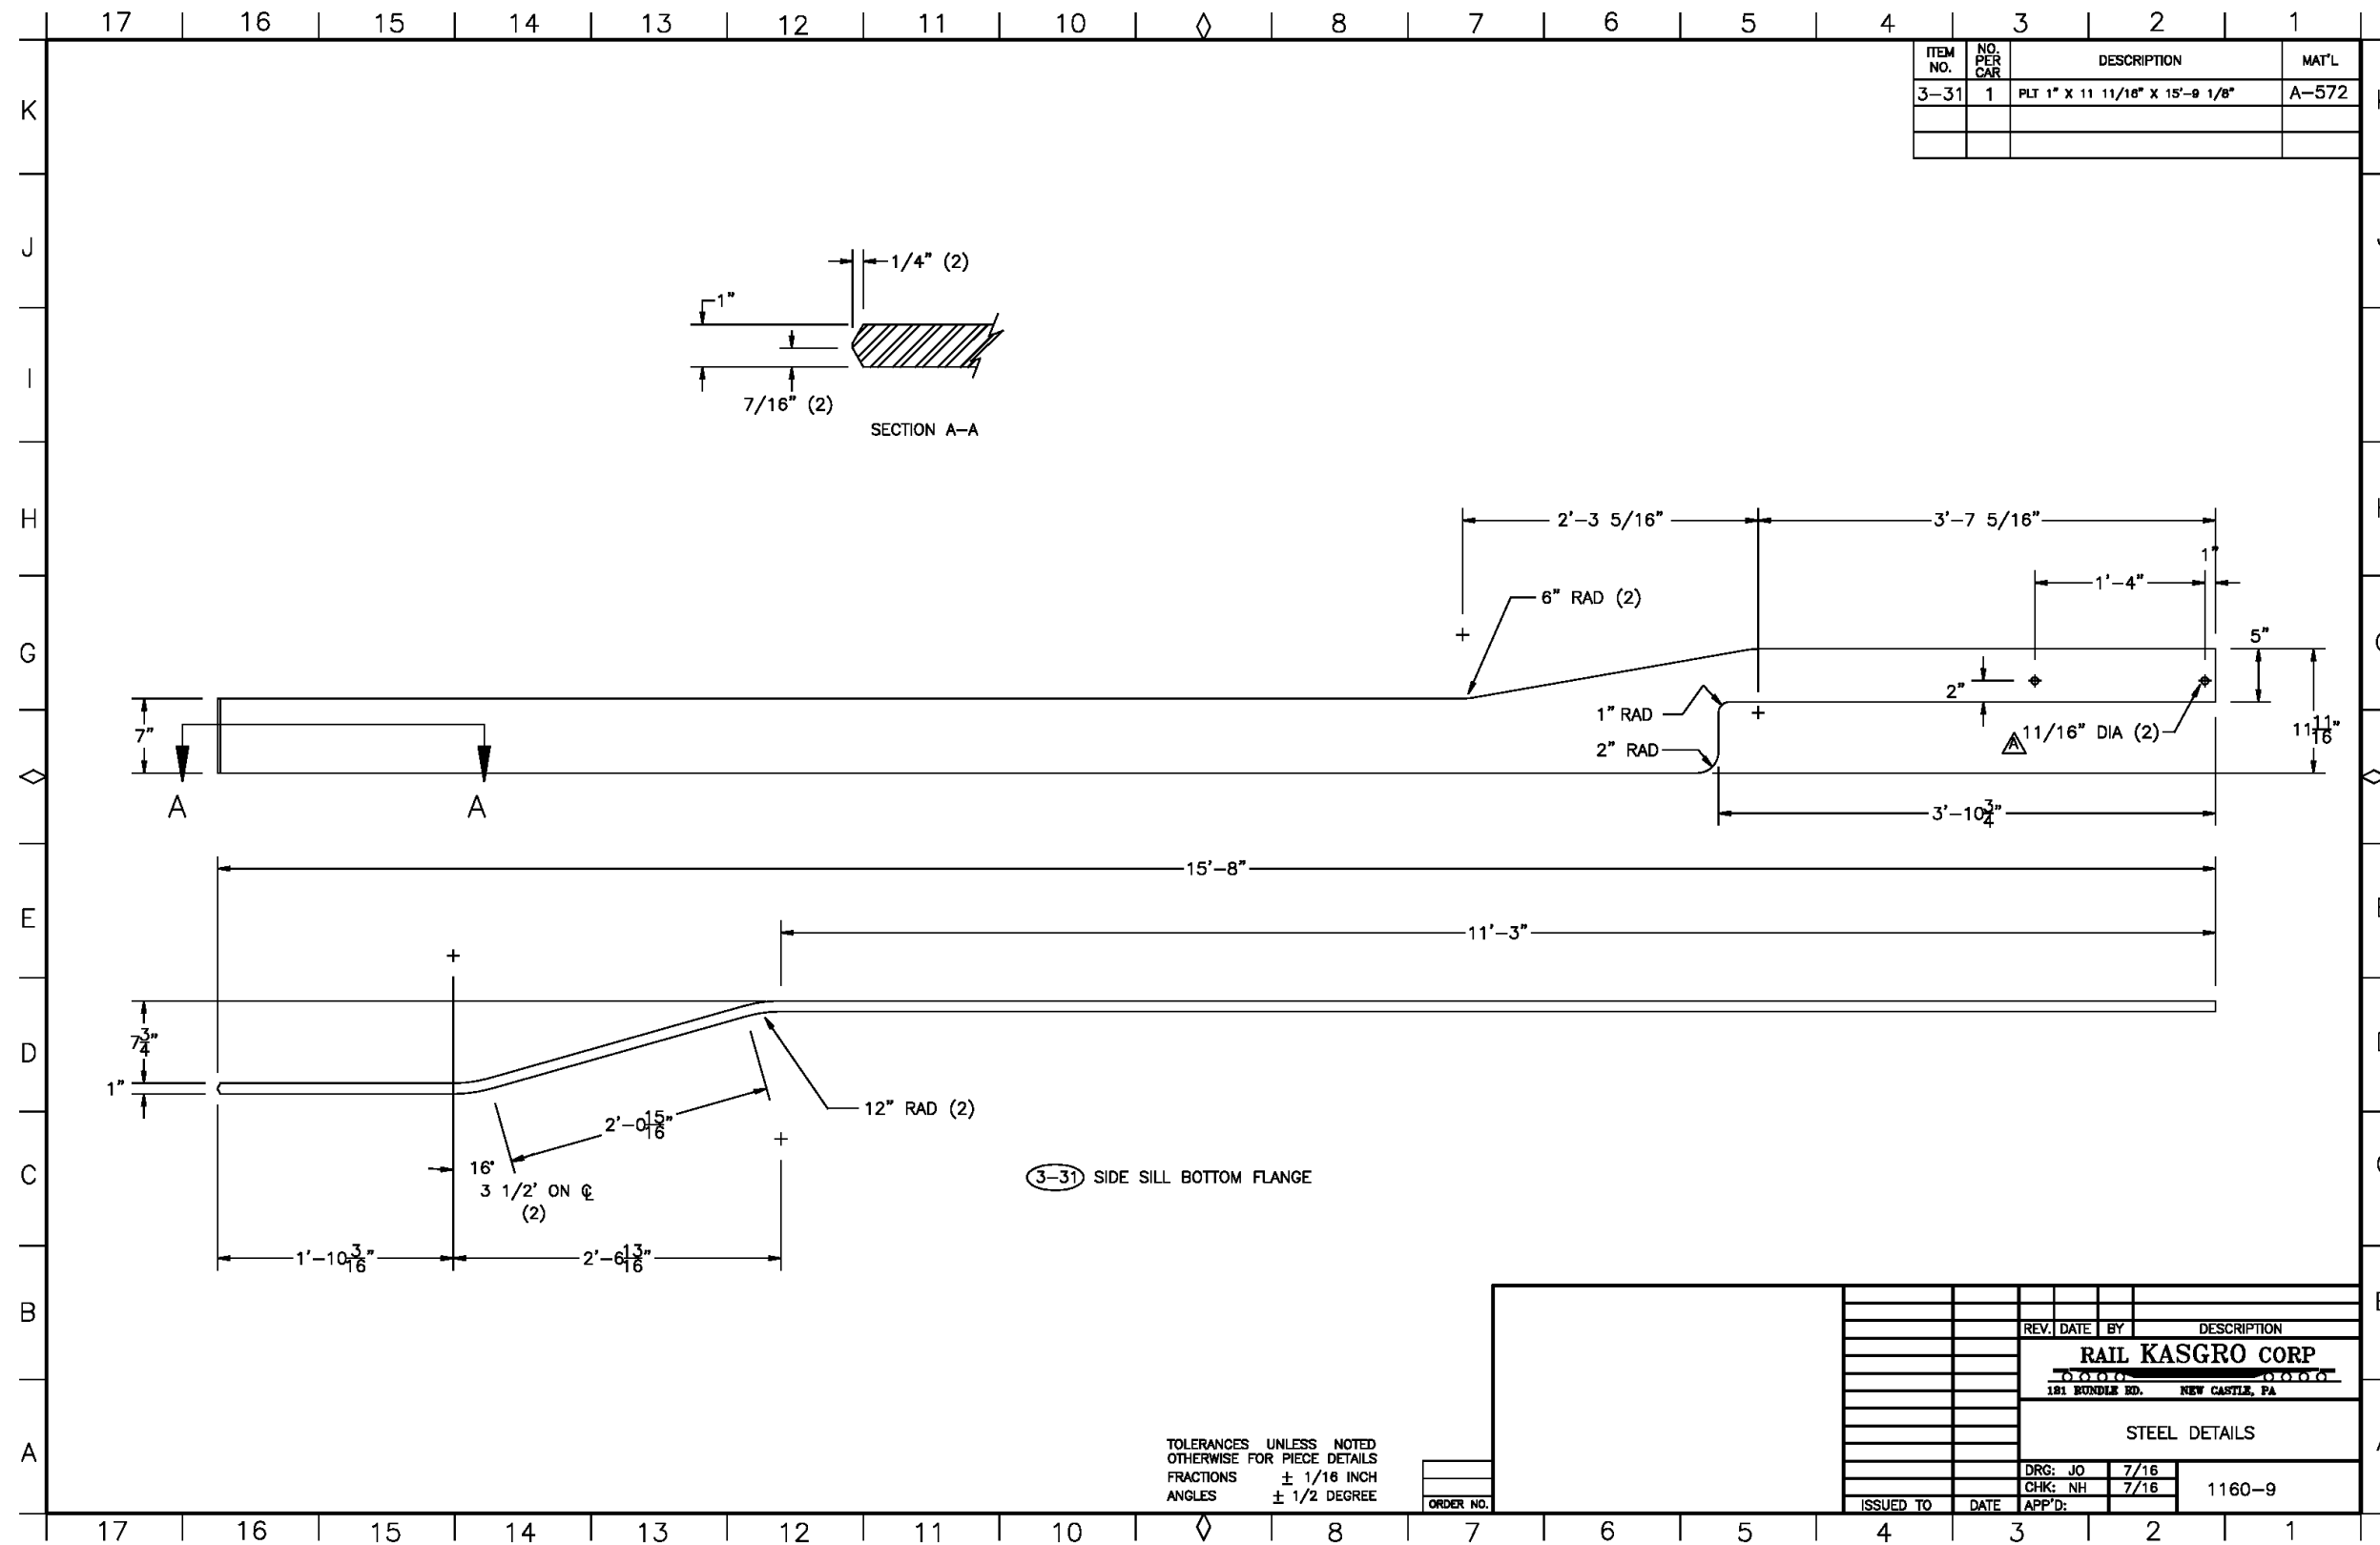


Appendix H-1.10 Steel Details

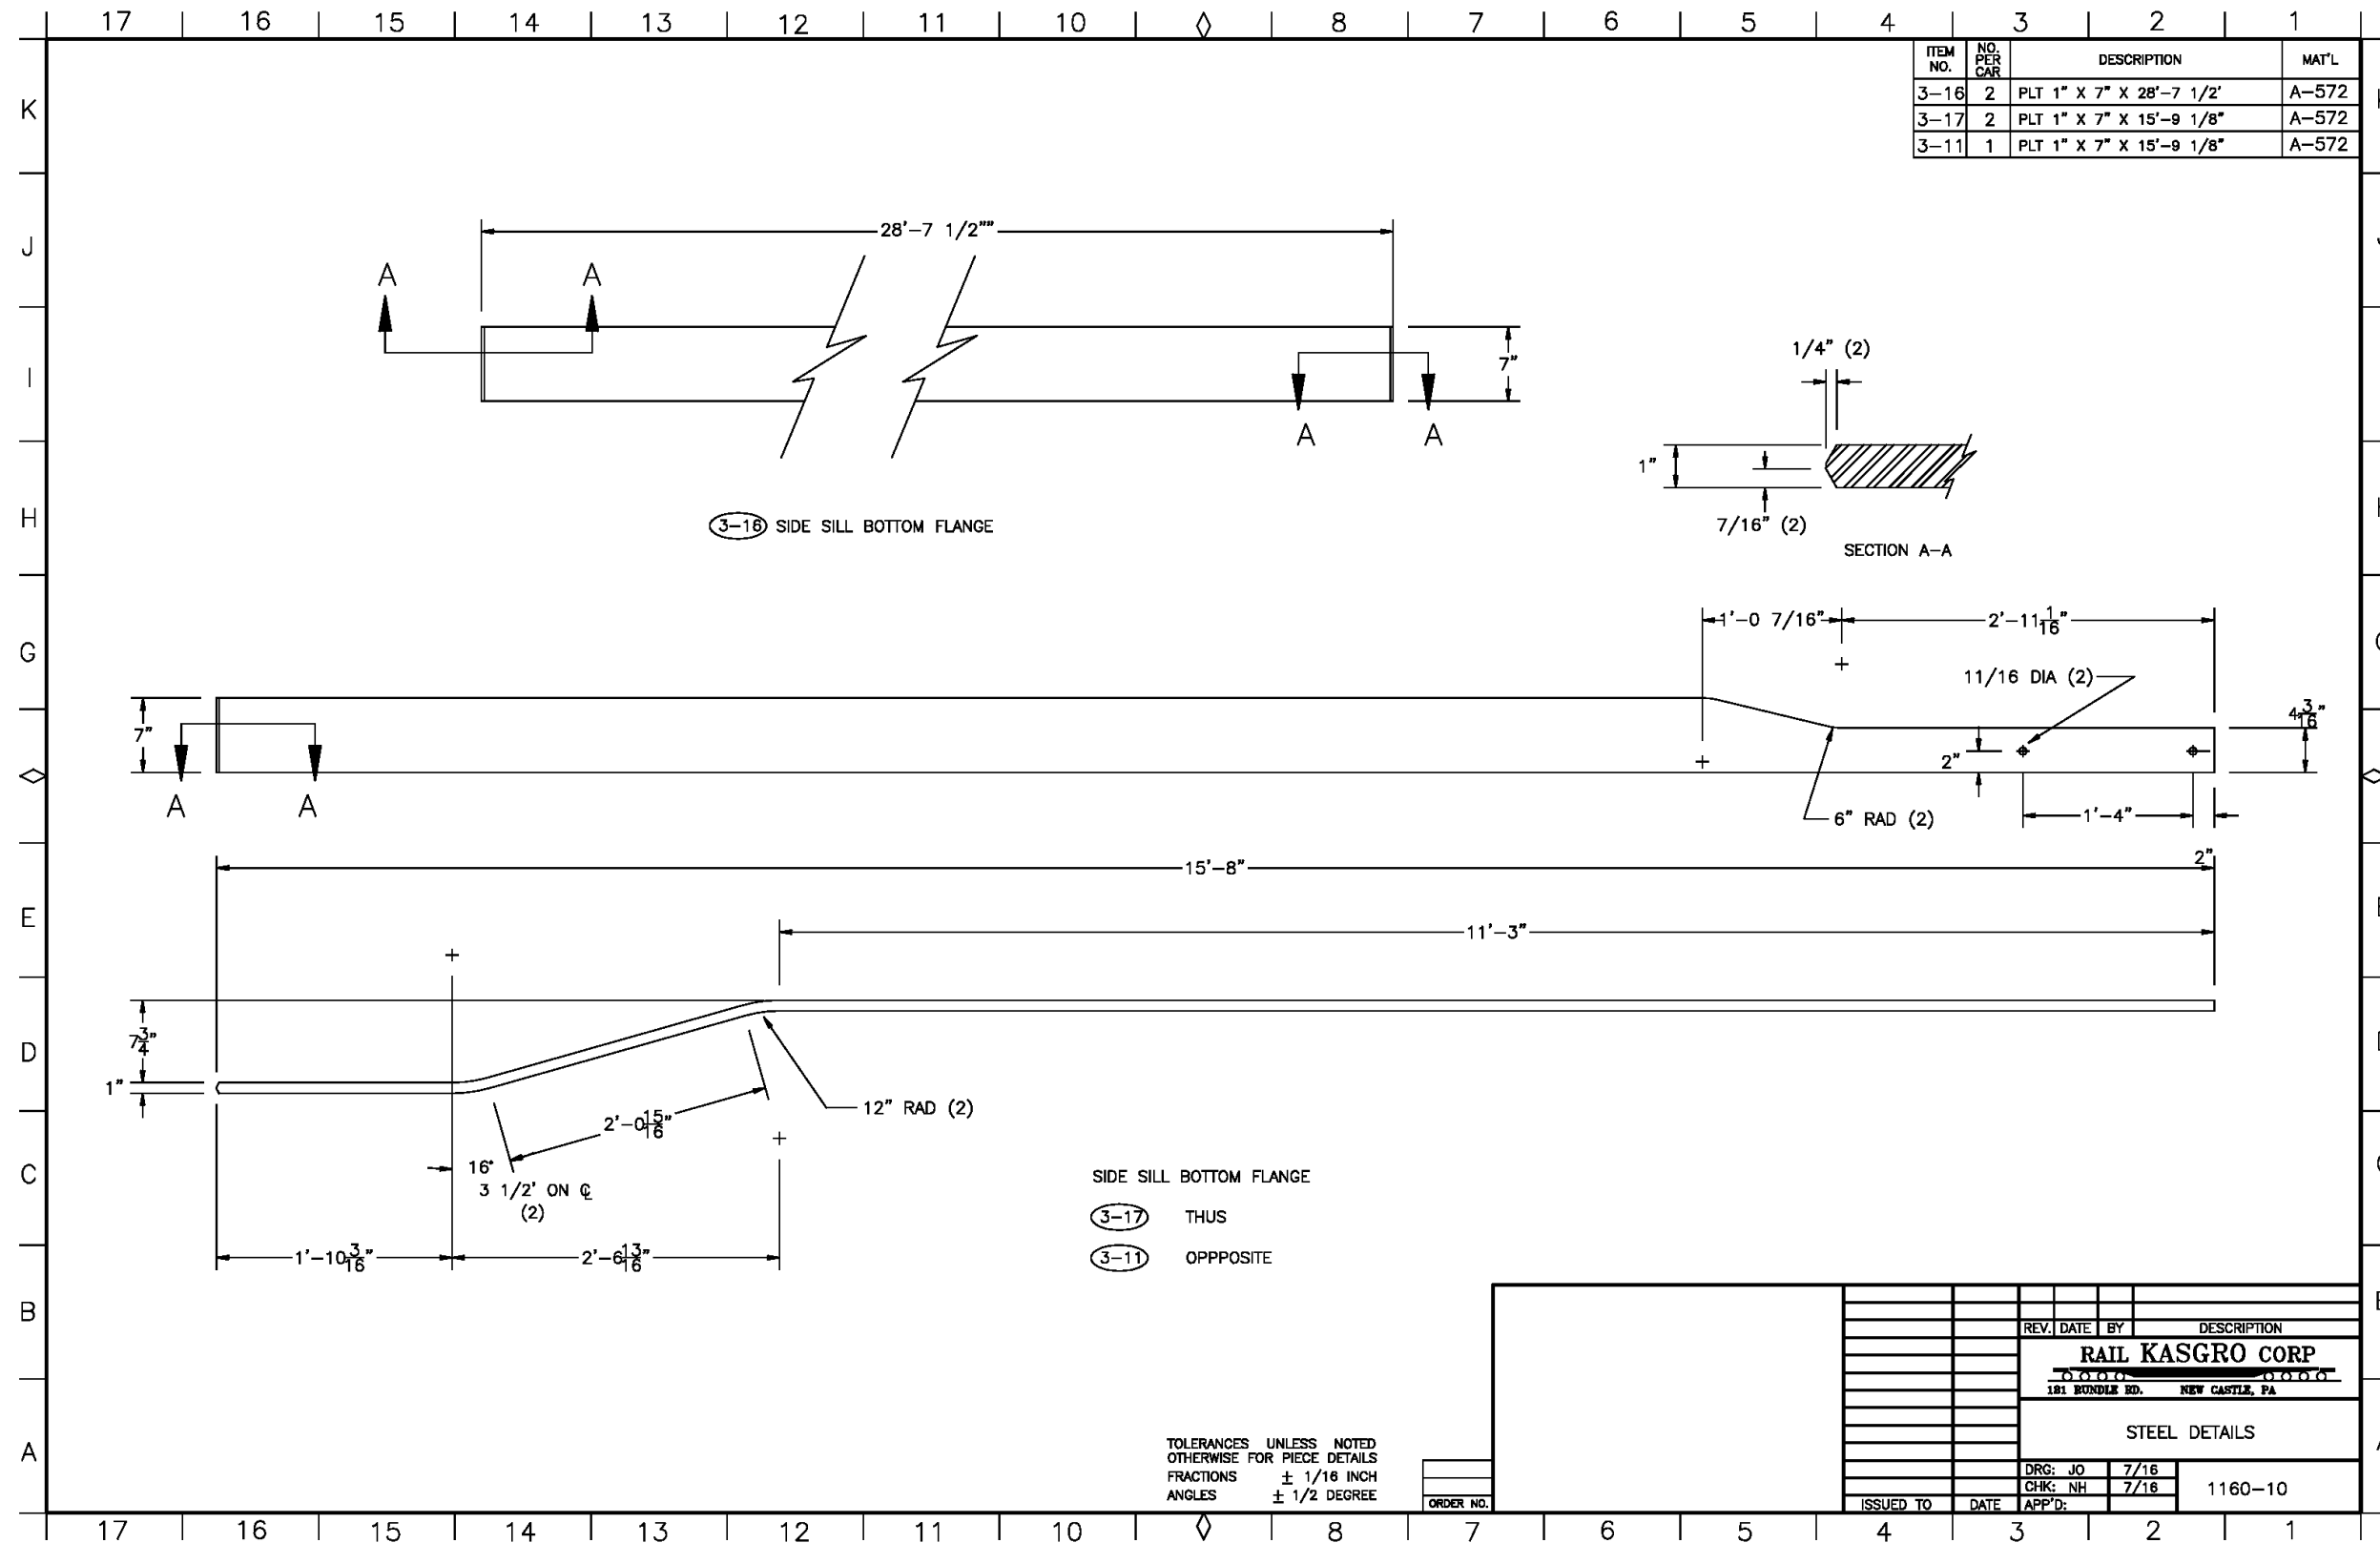


Appendix H-1.11 Steel Details

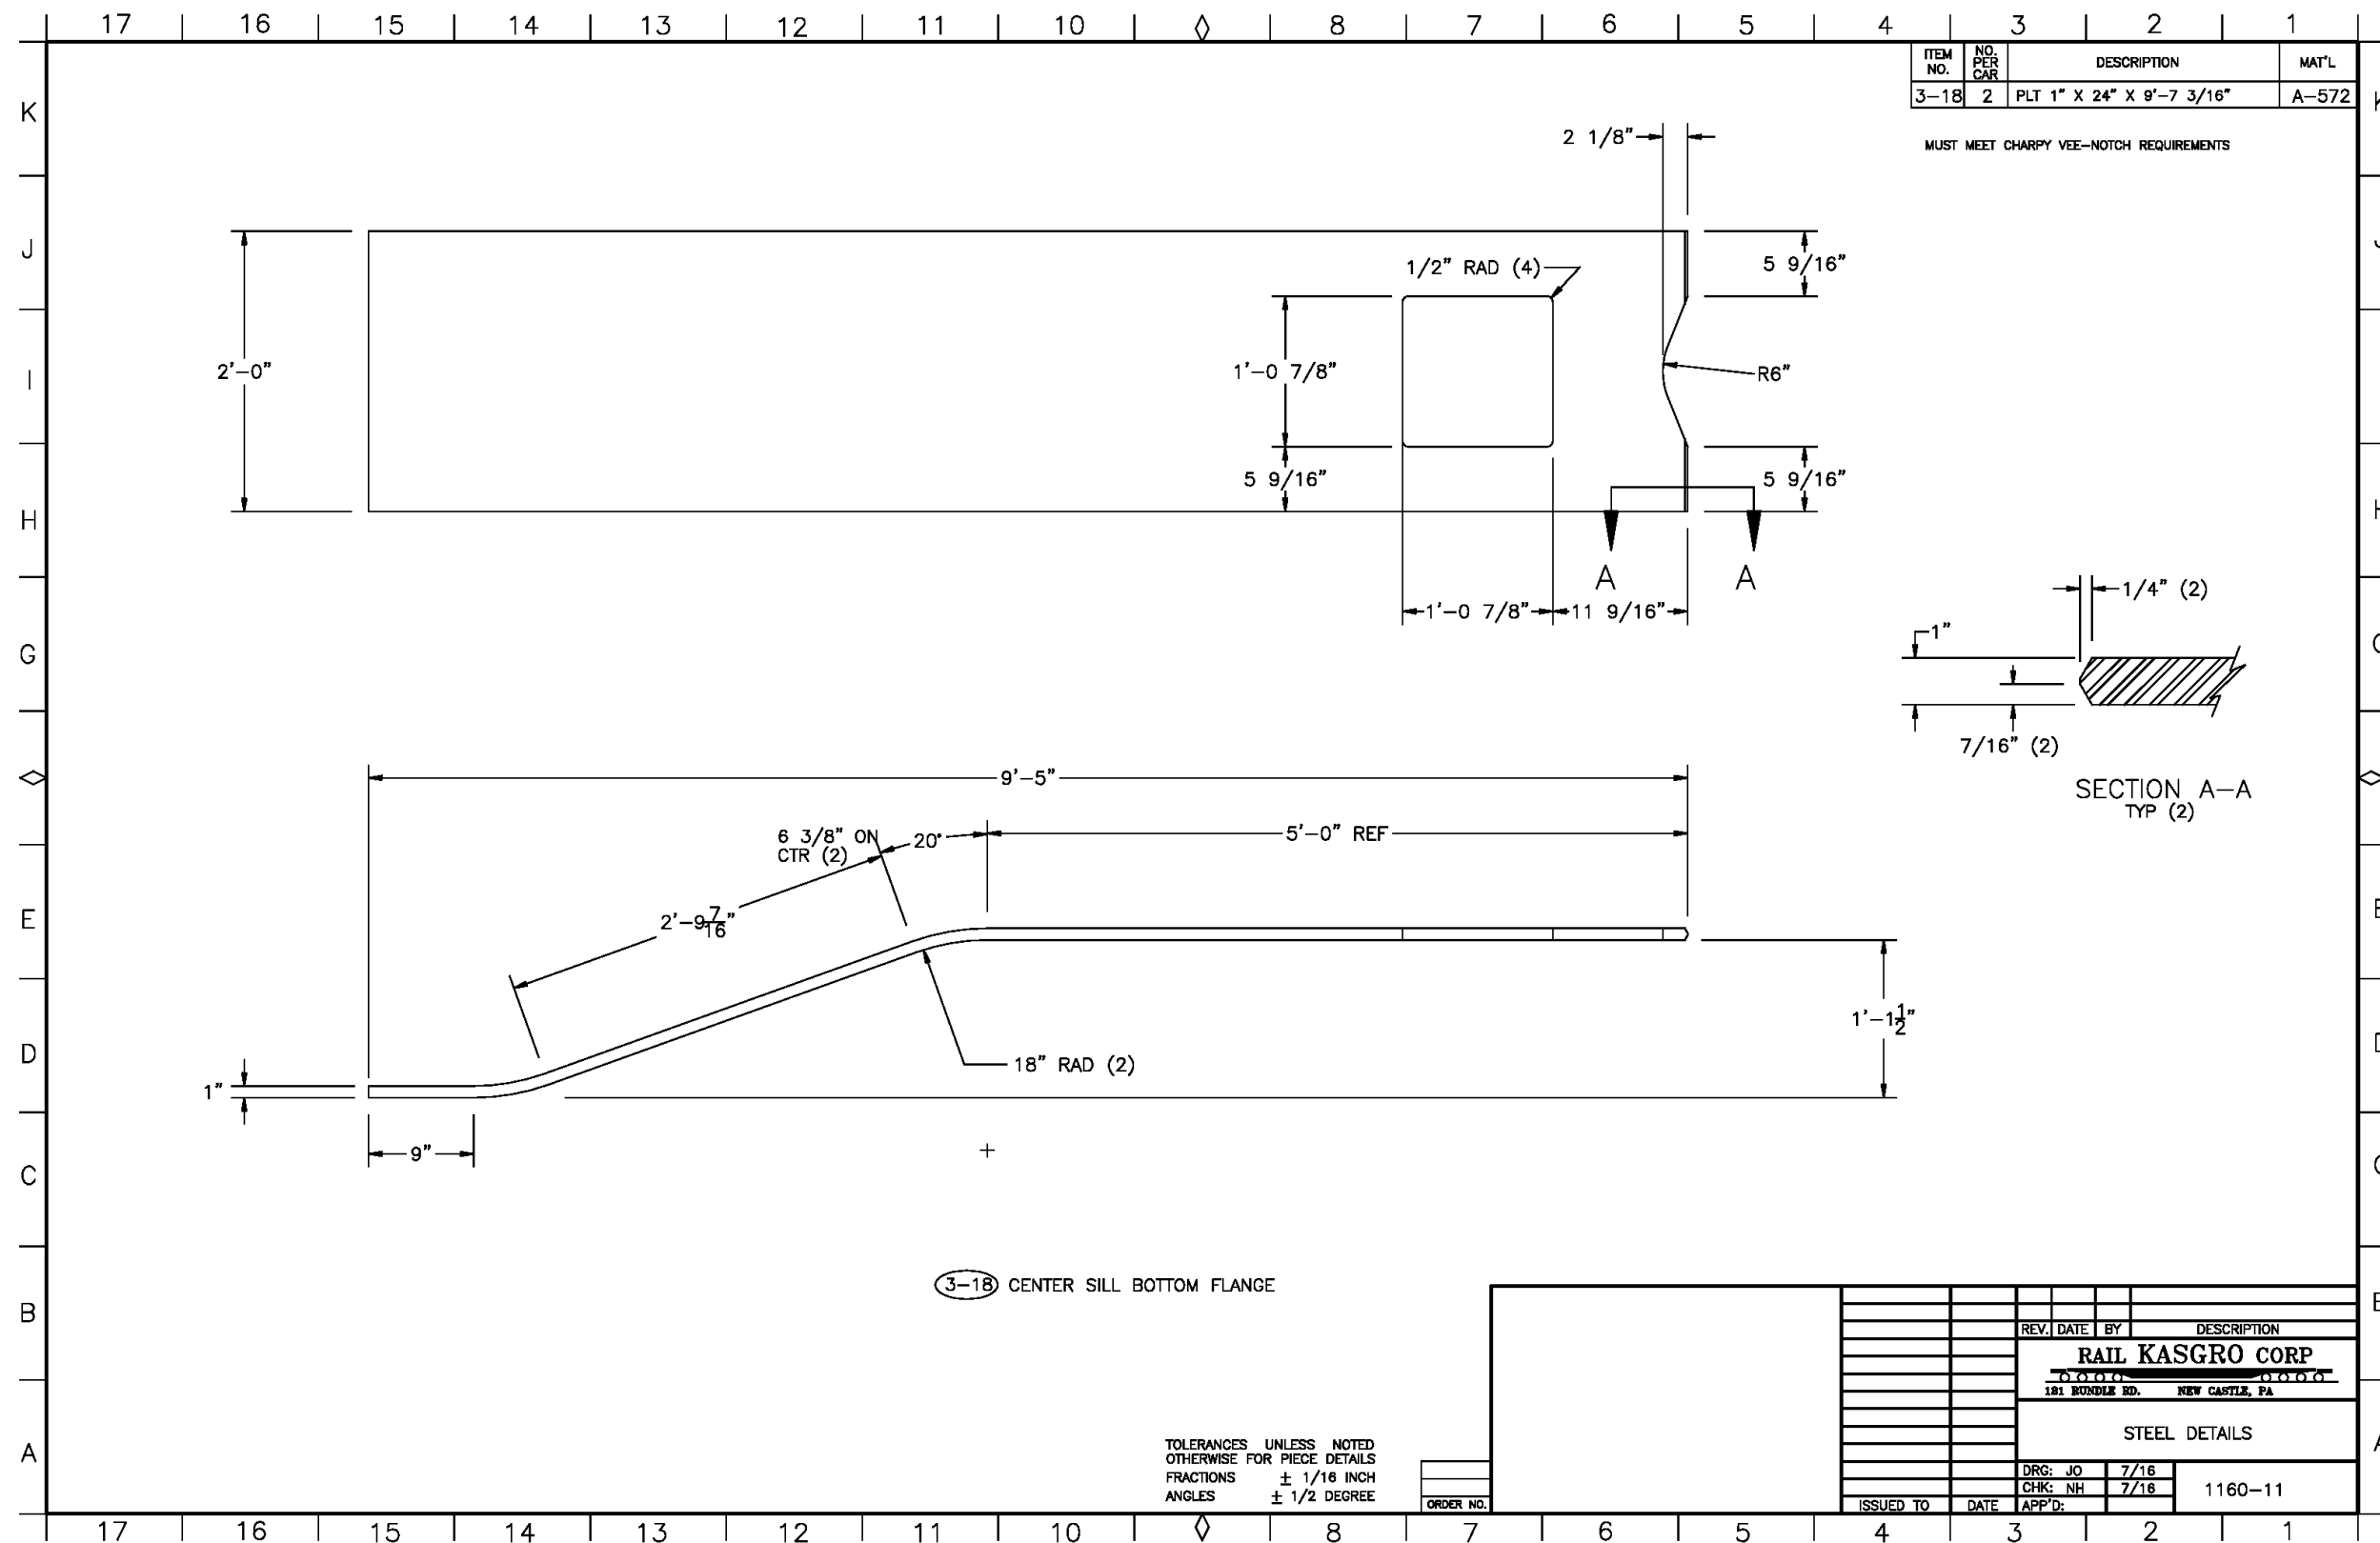


Appendix H-1.12 Steel Details

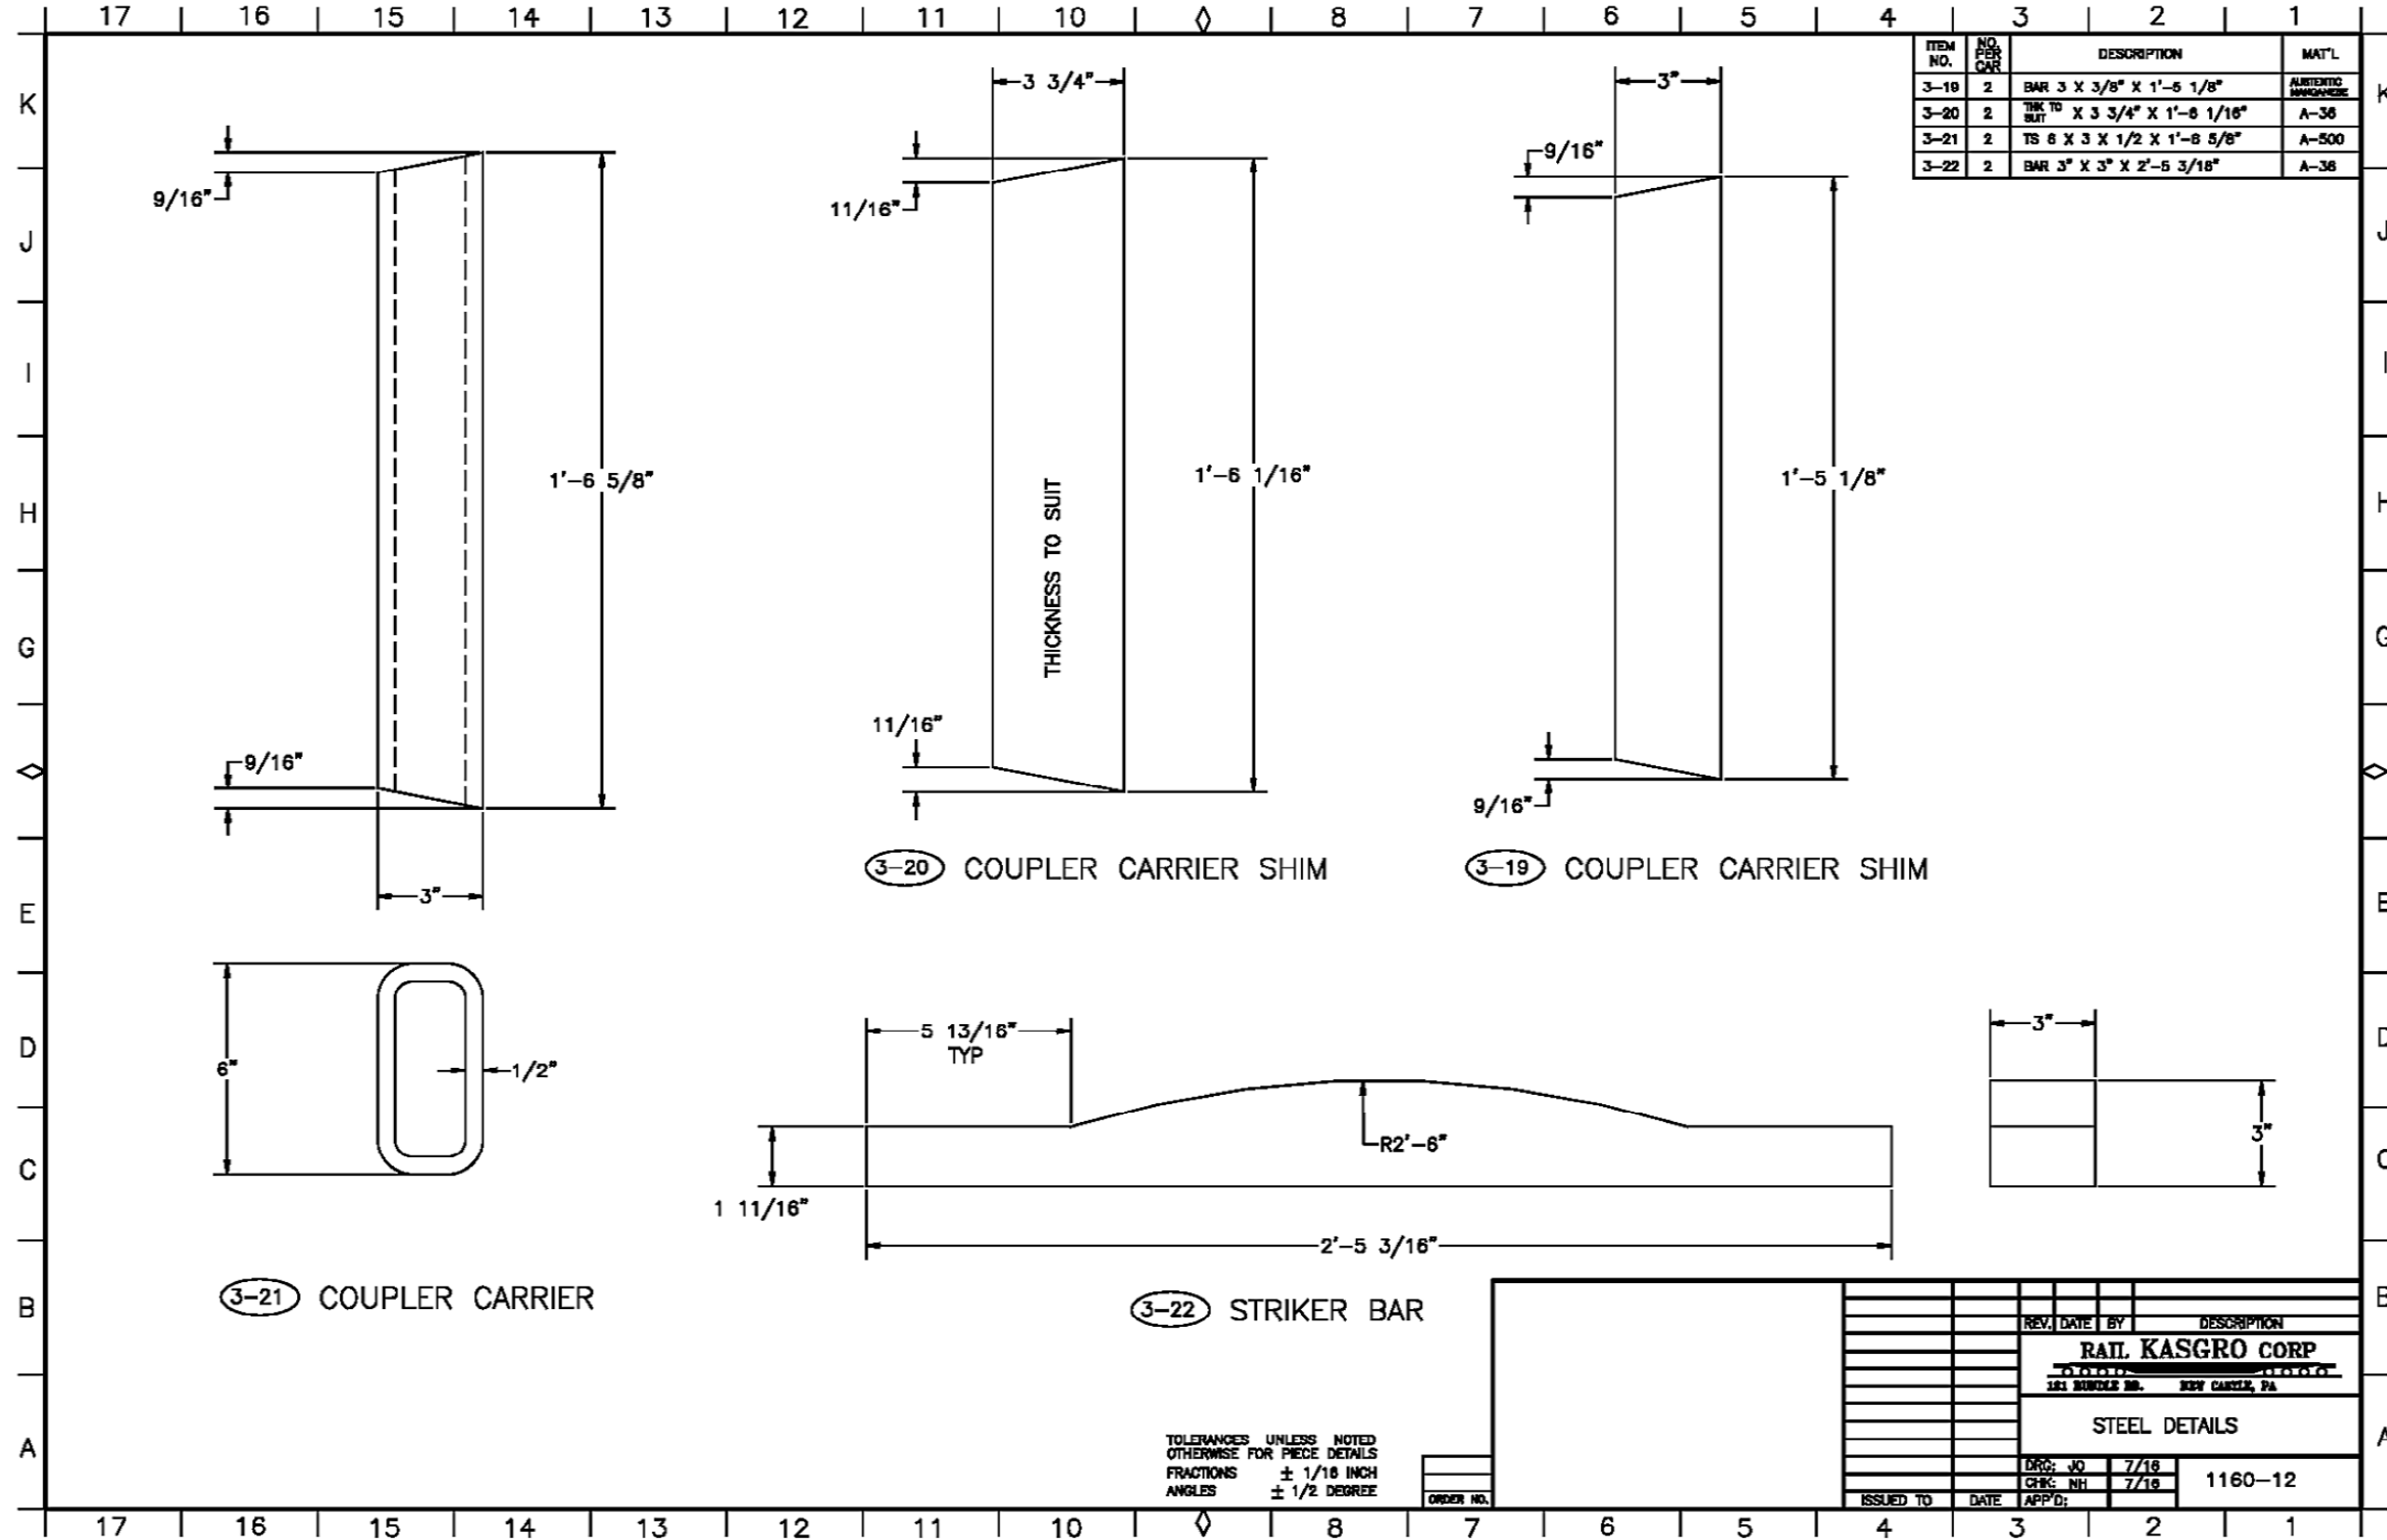


Appendix H-1.13 Steel Details

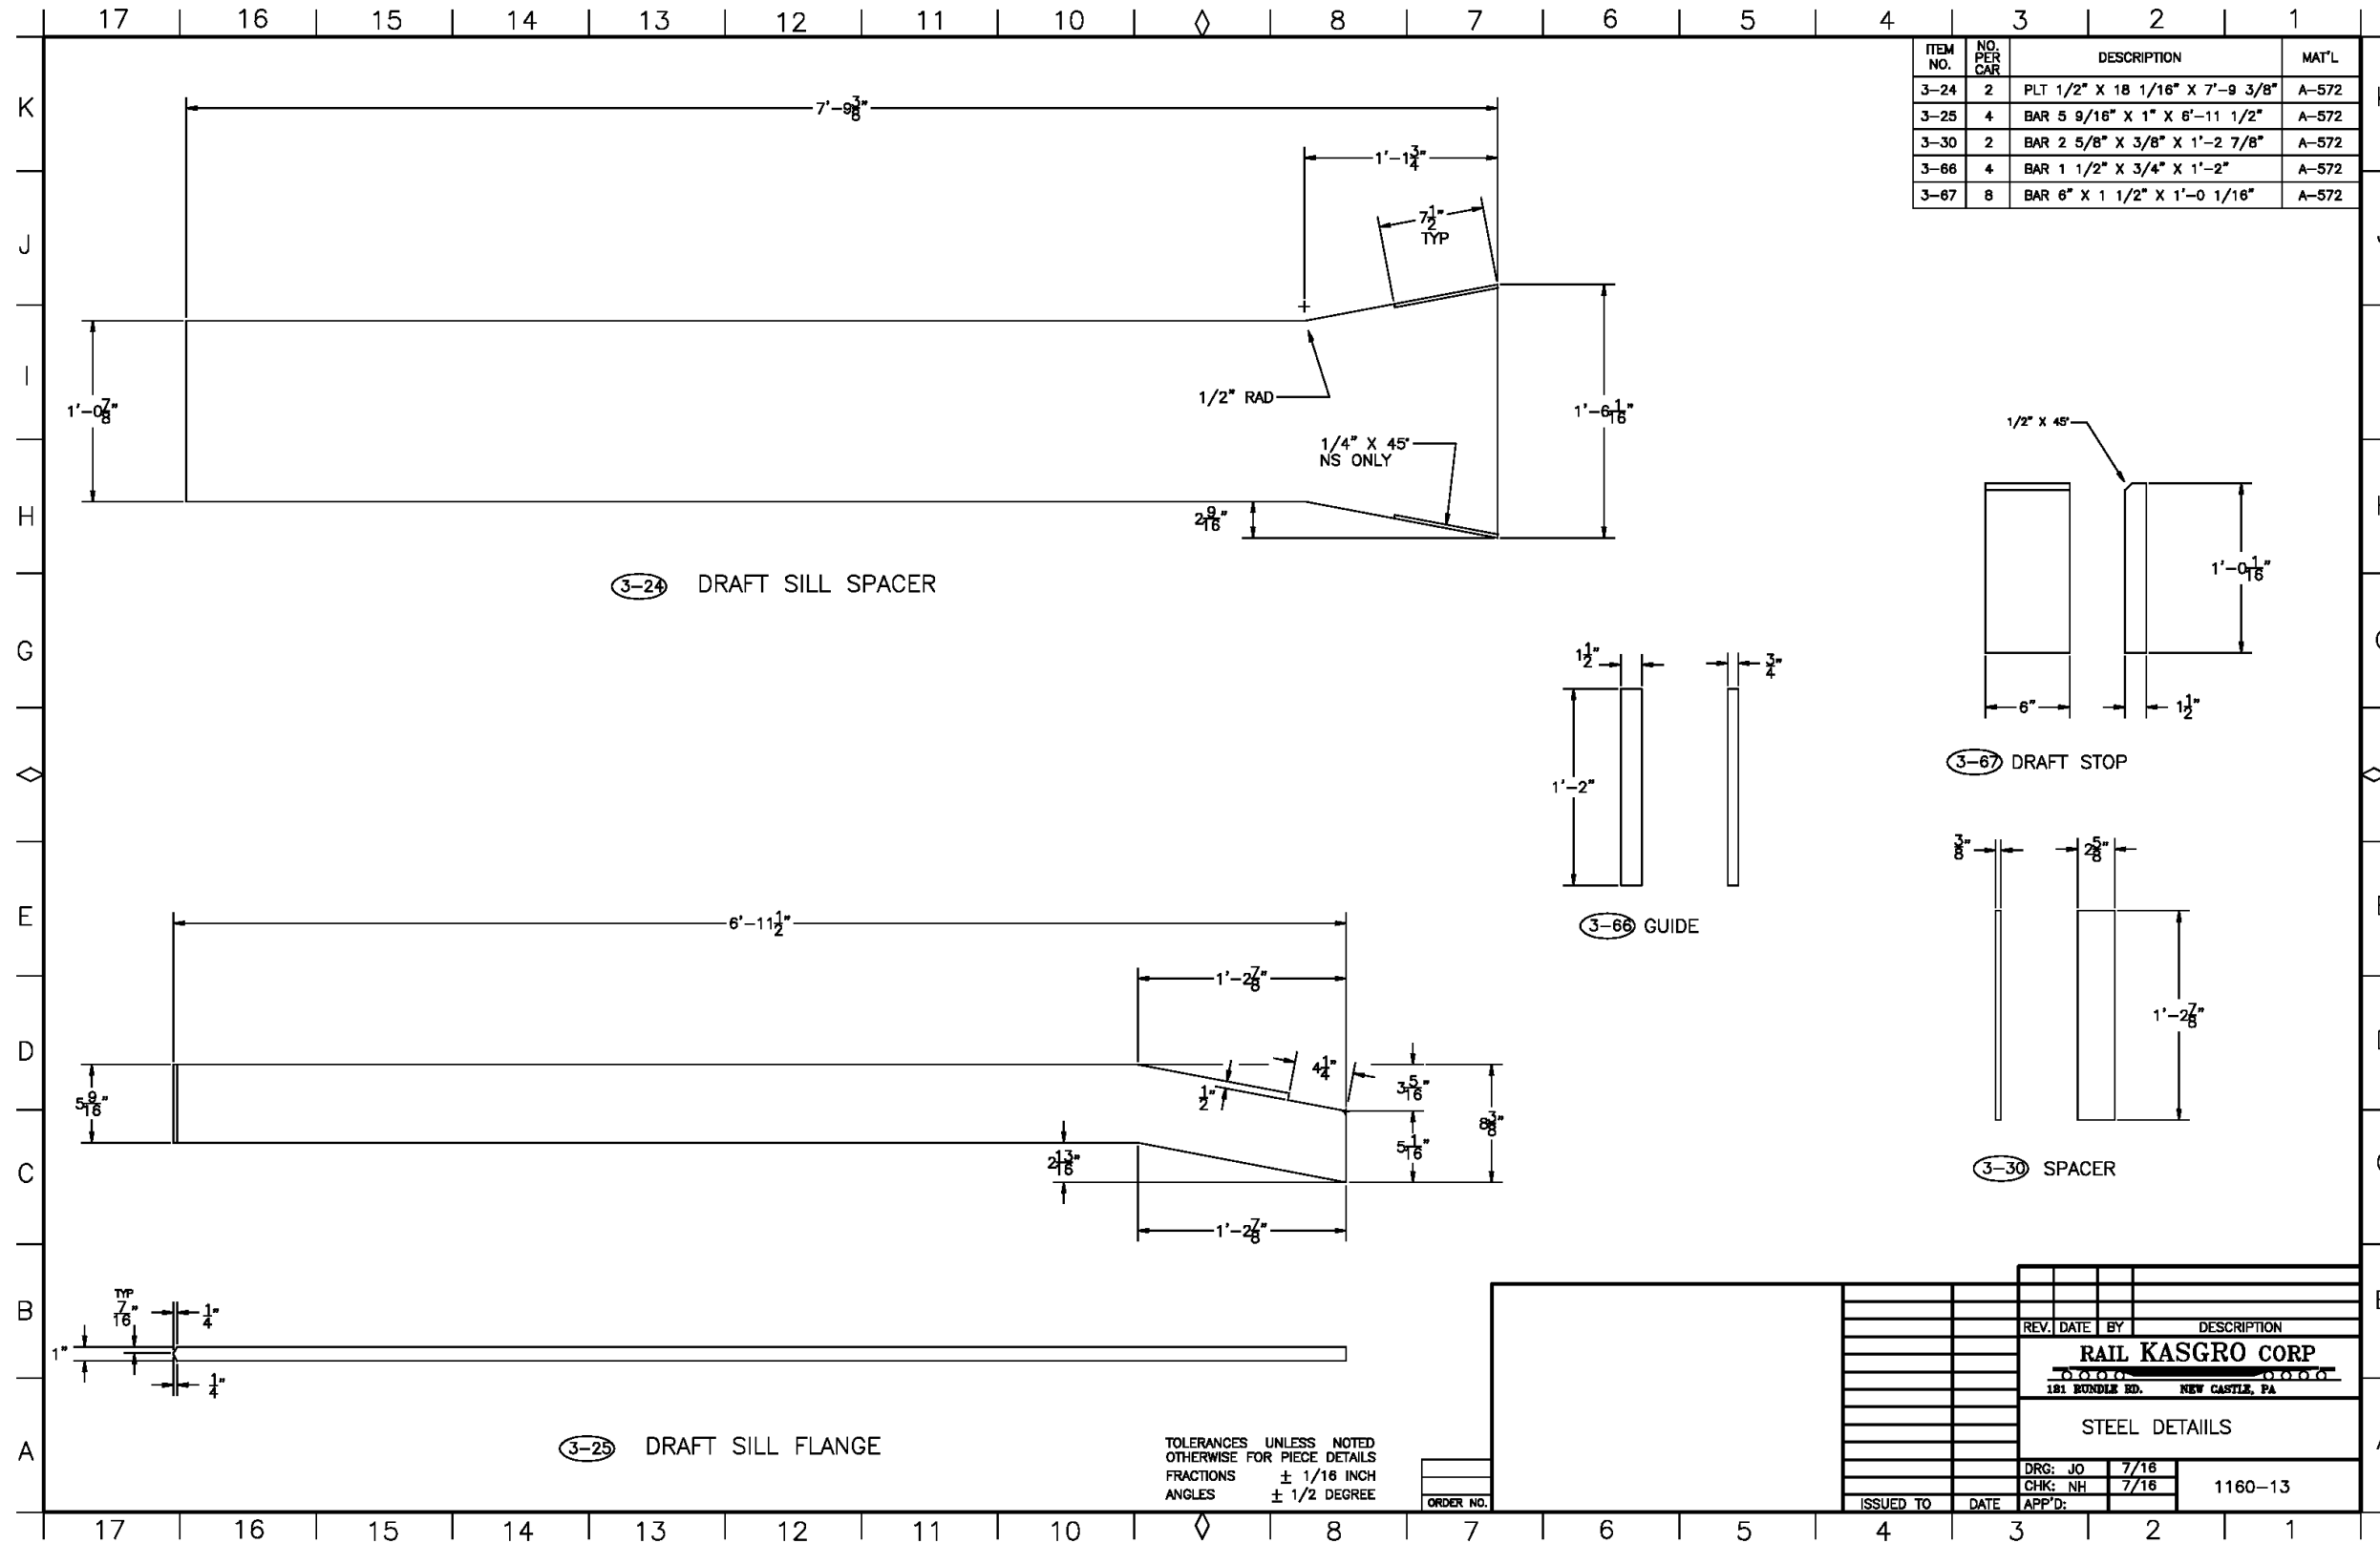


Appendix H-1.14 Steel Details

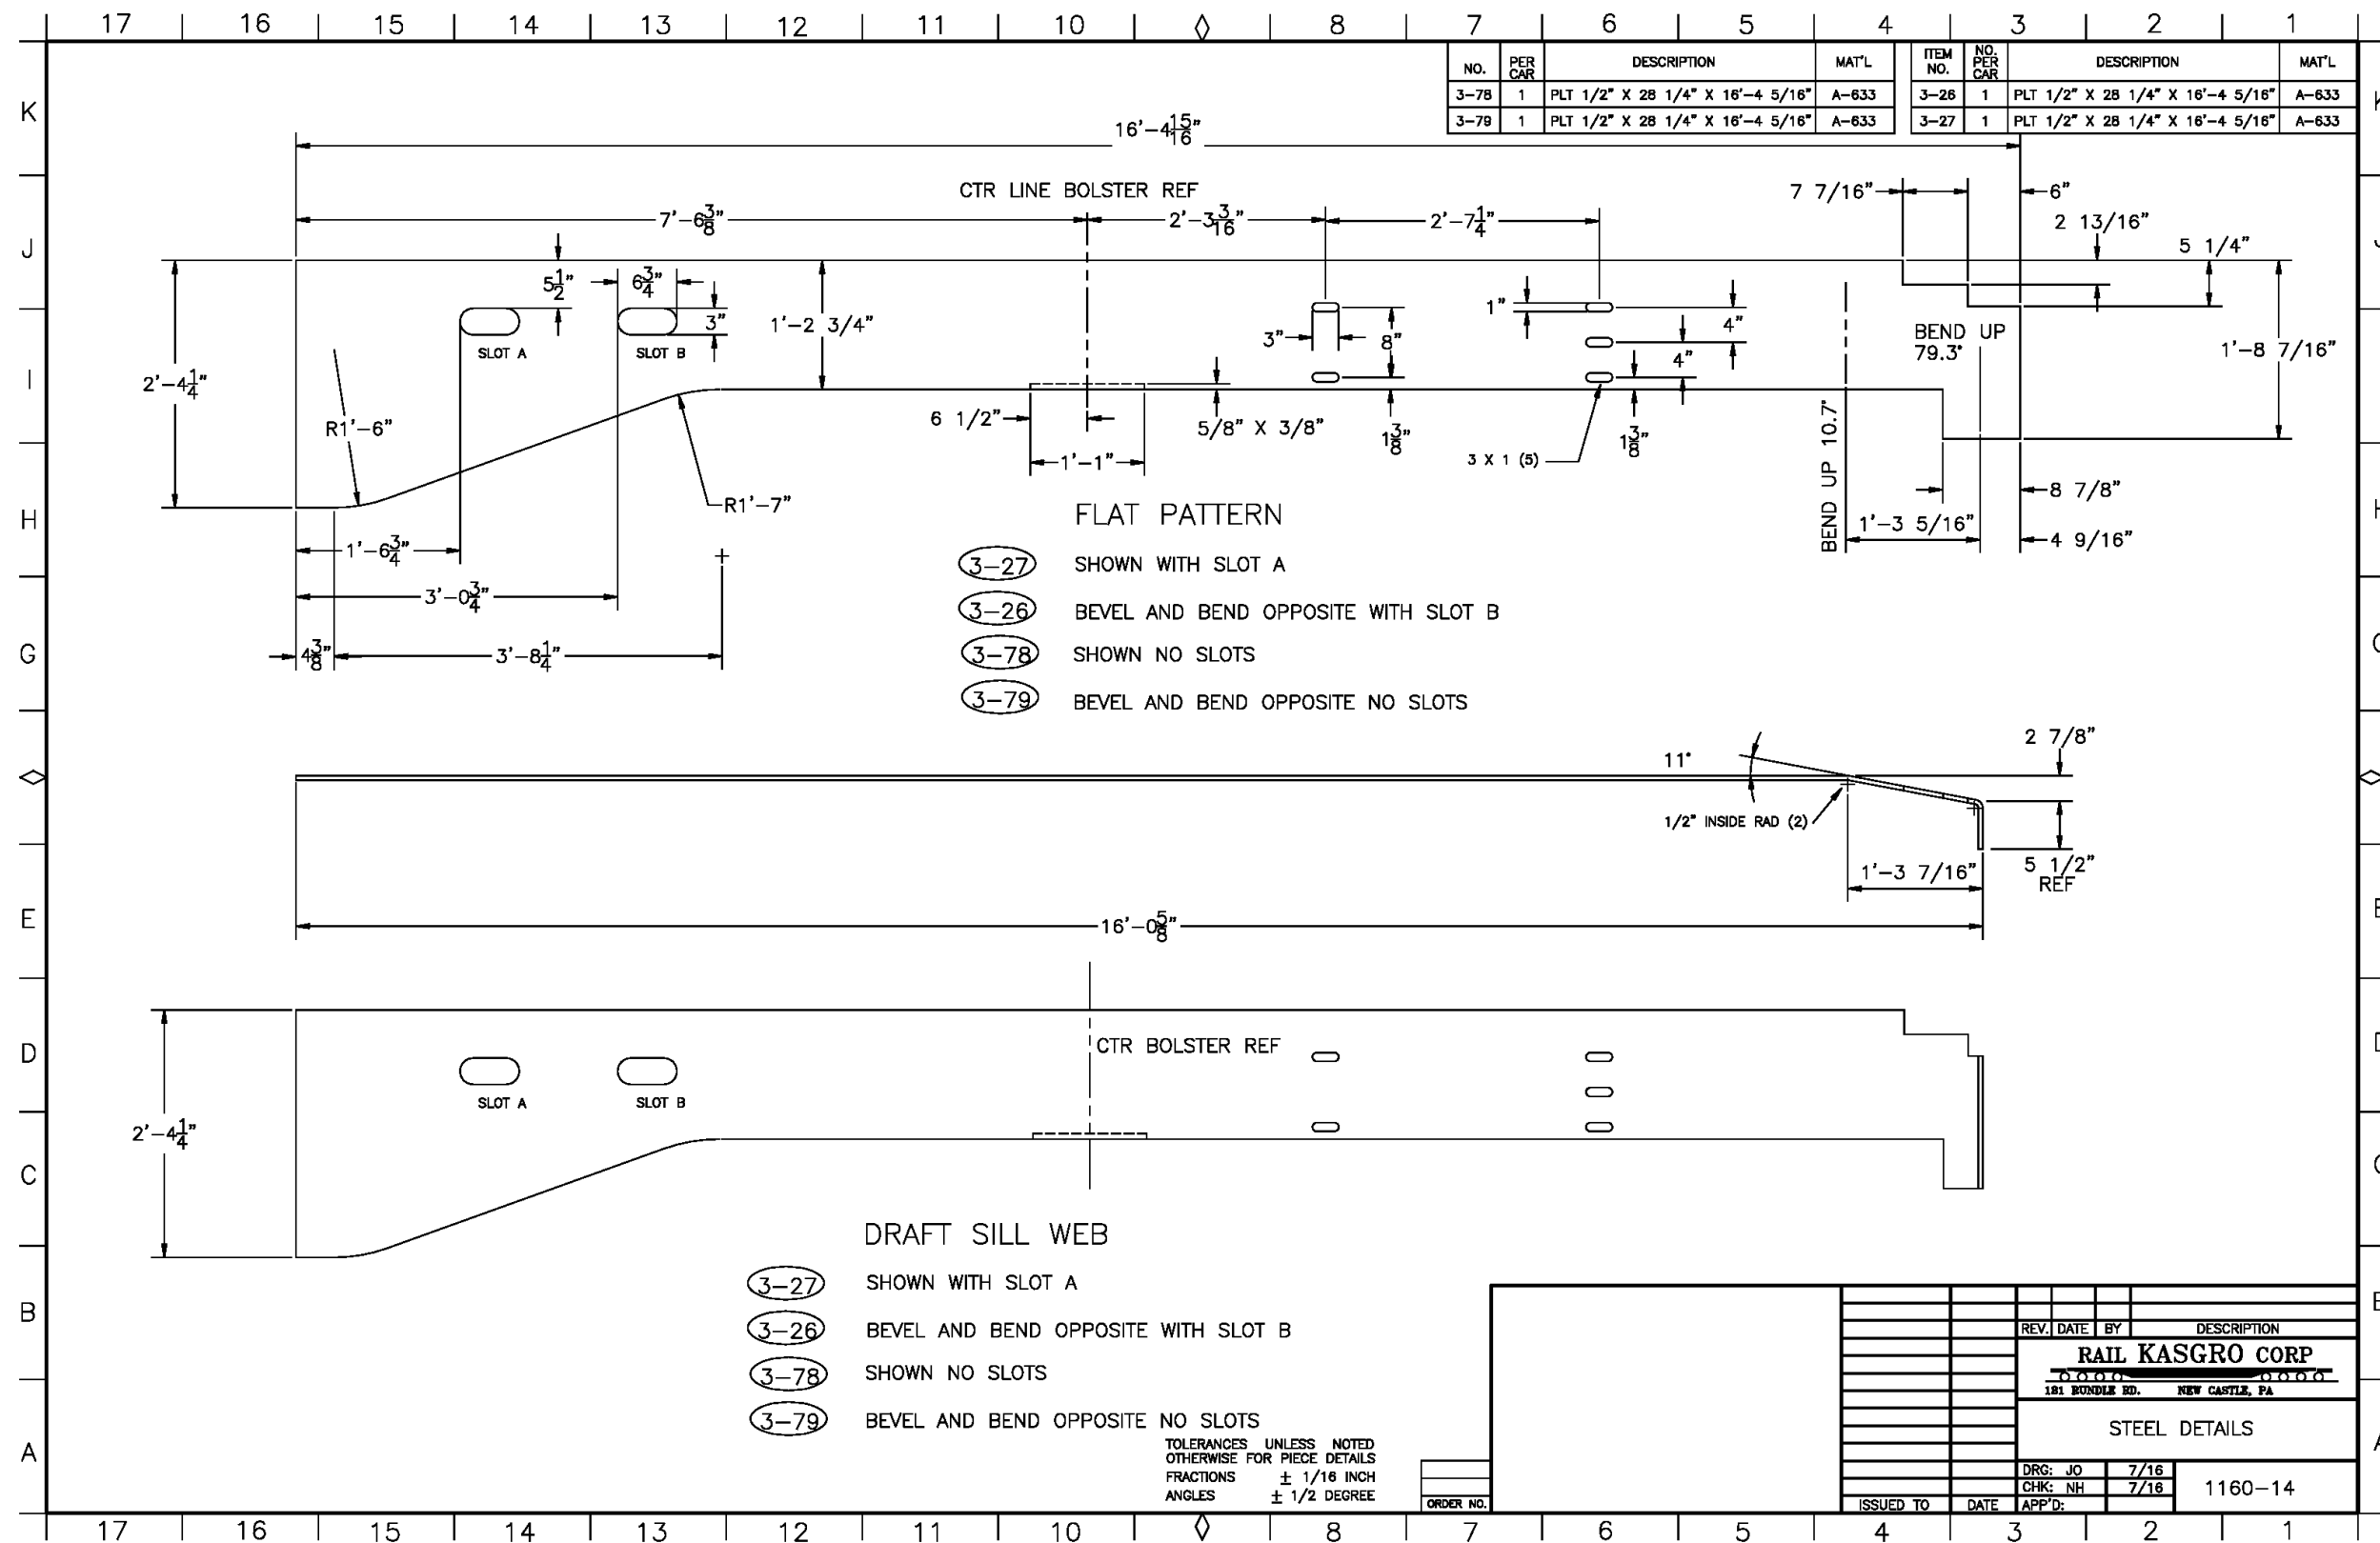


Appendix H-1.15 Steel Details

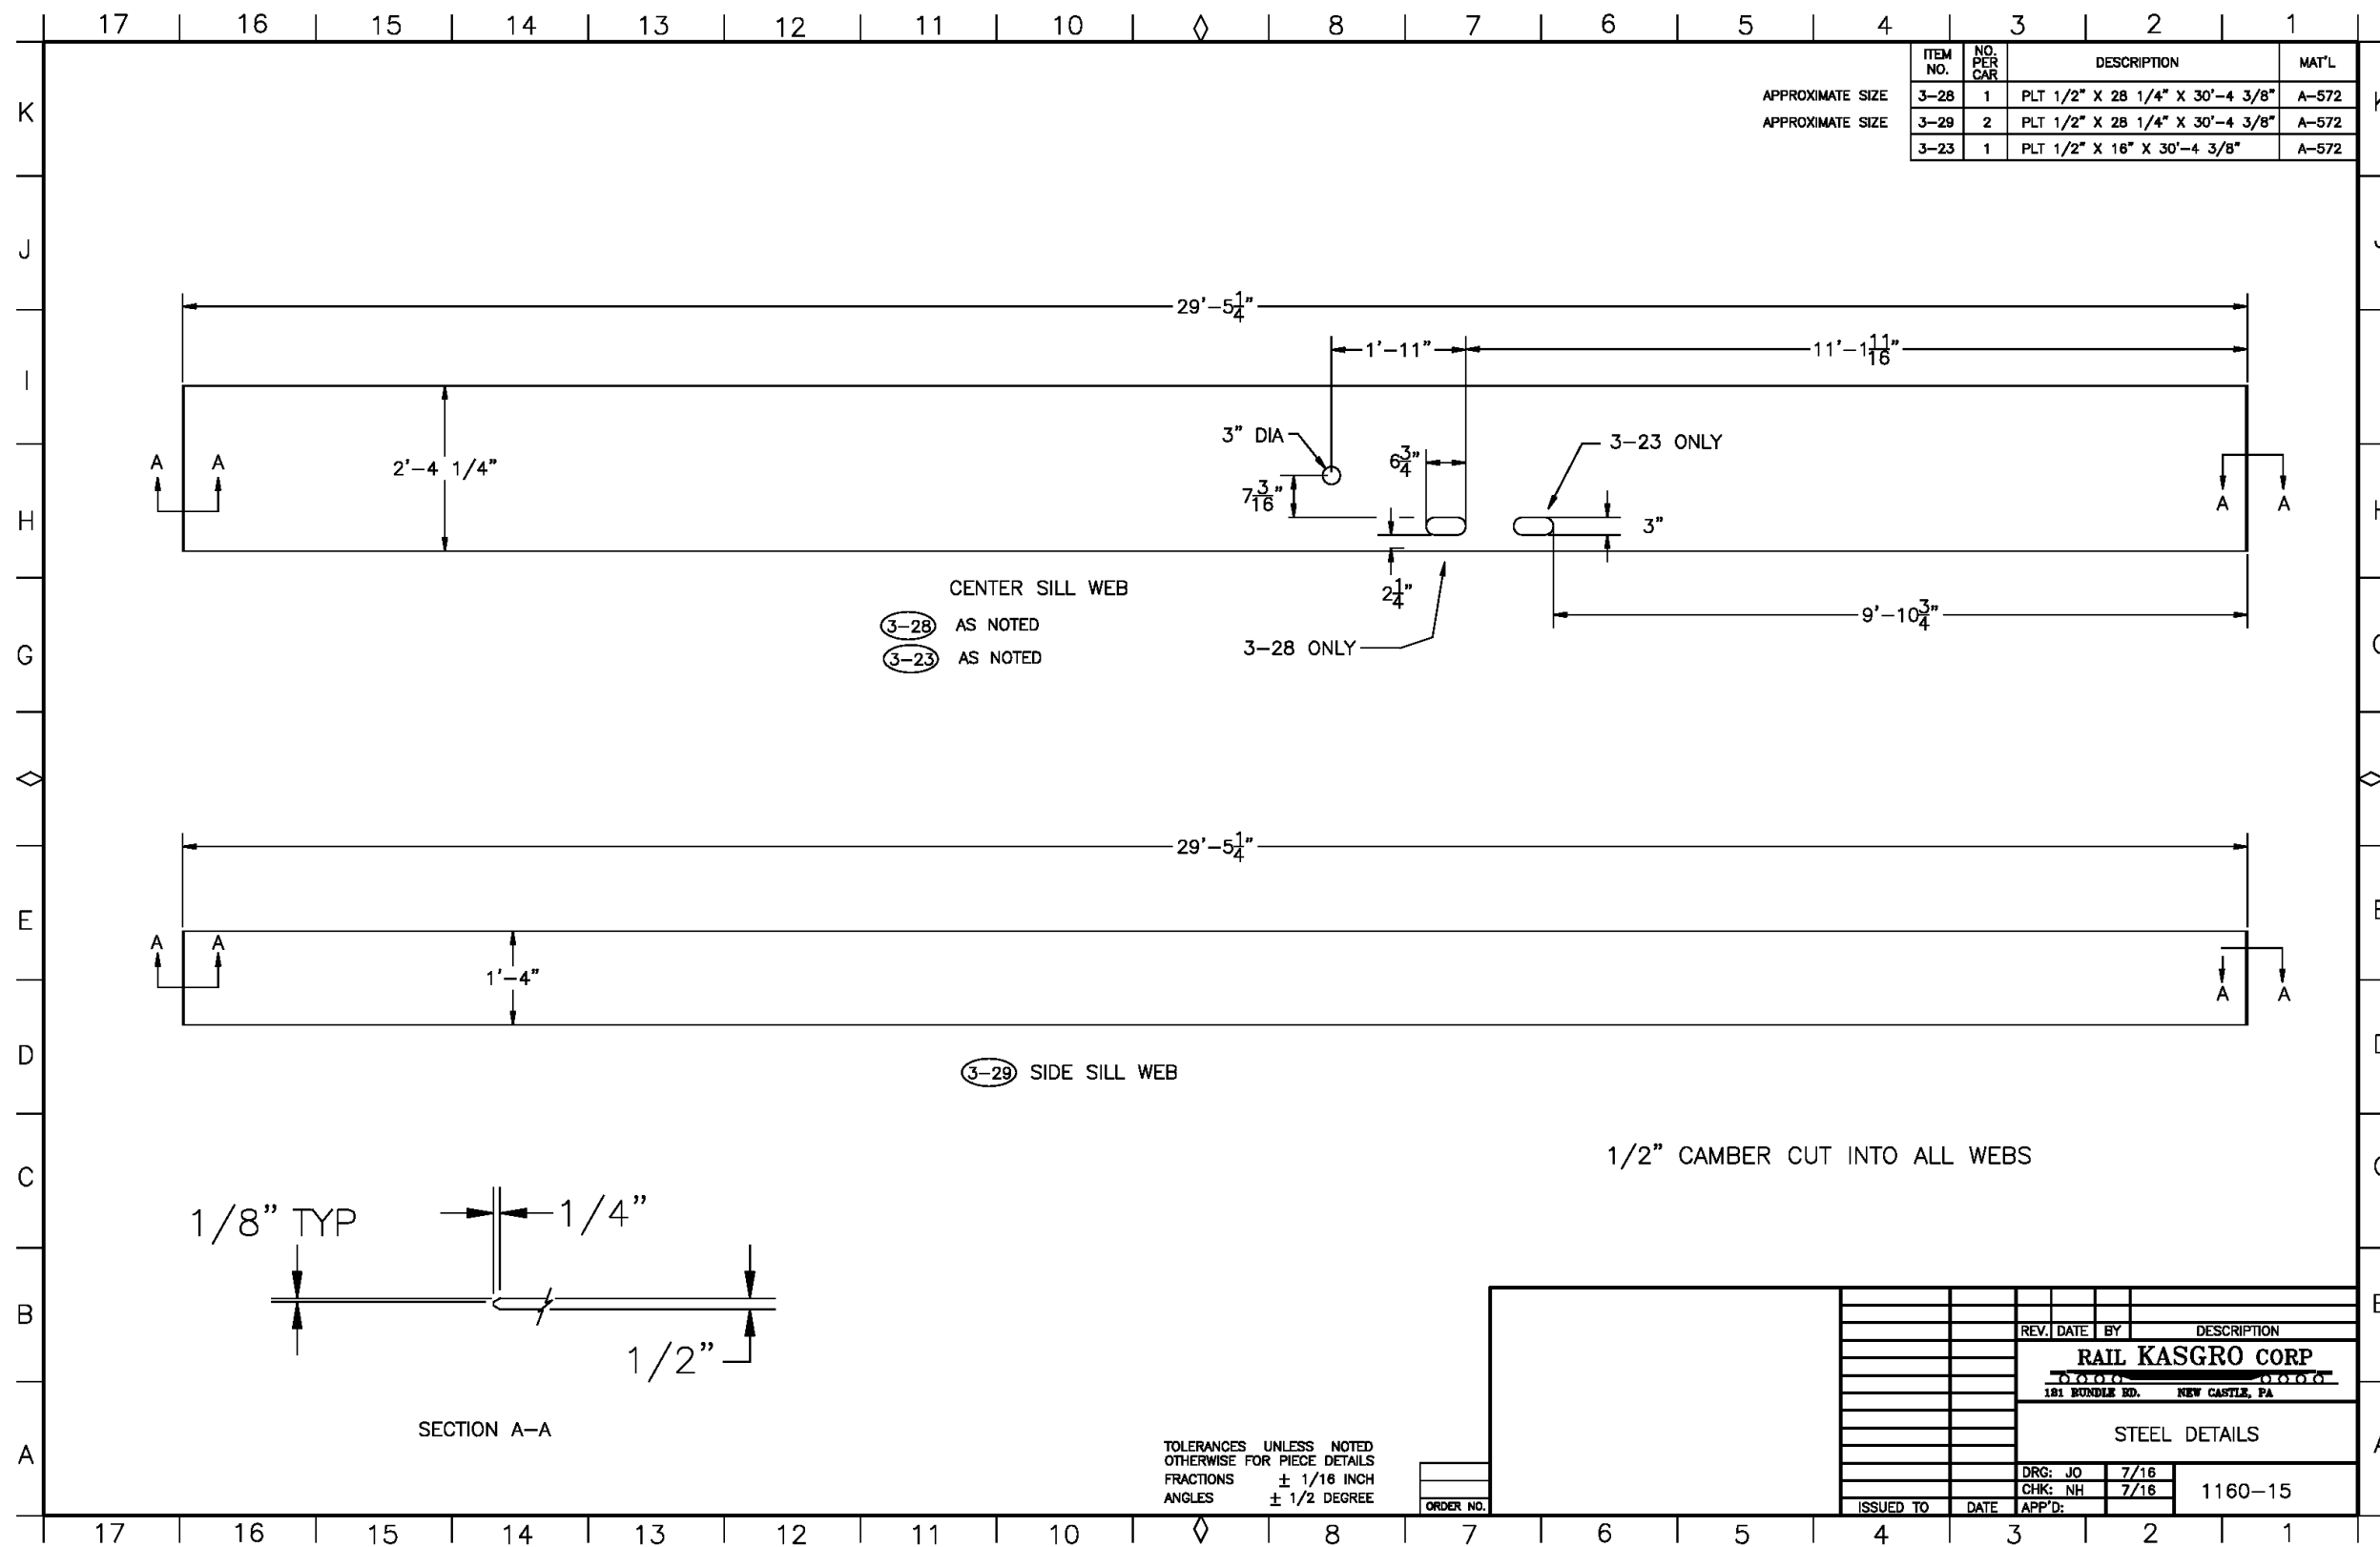


Appendix H-1.16 Deck Plate

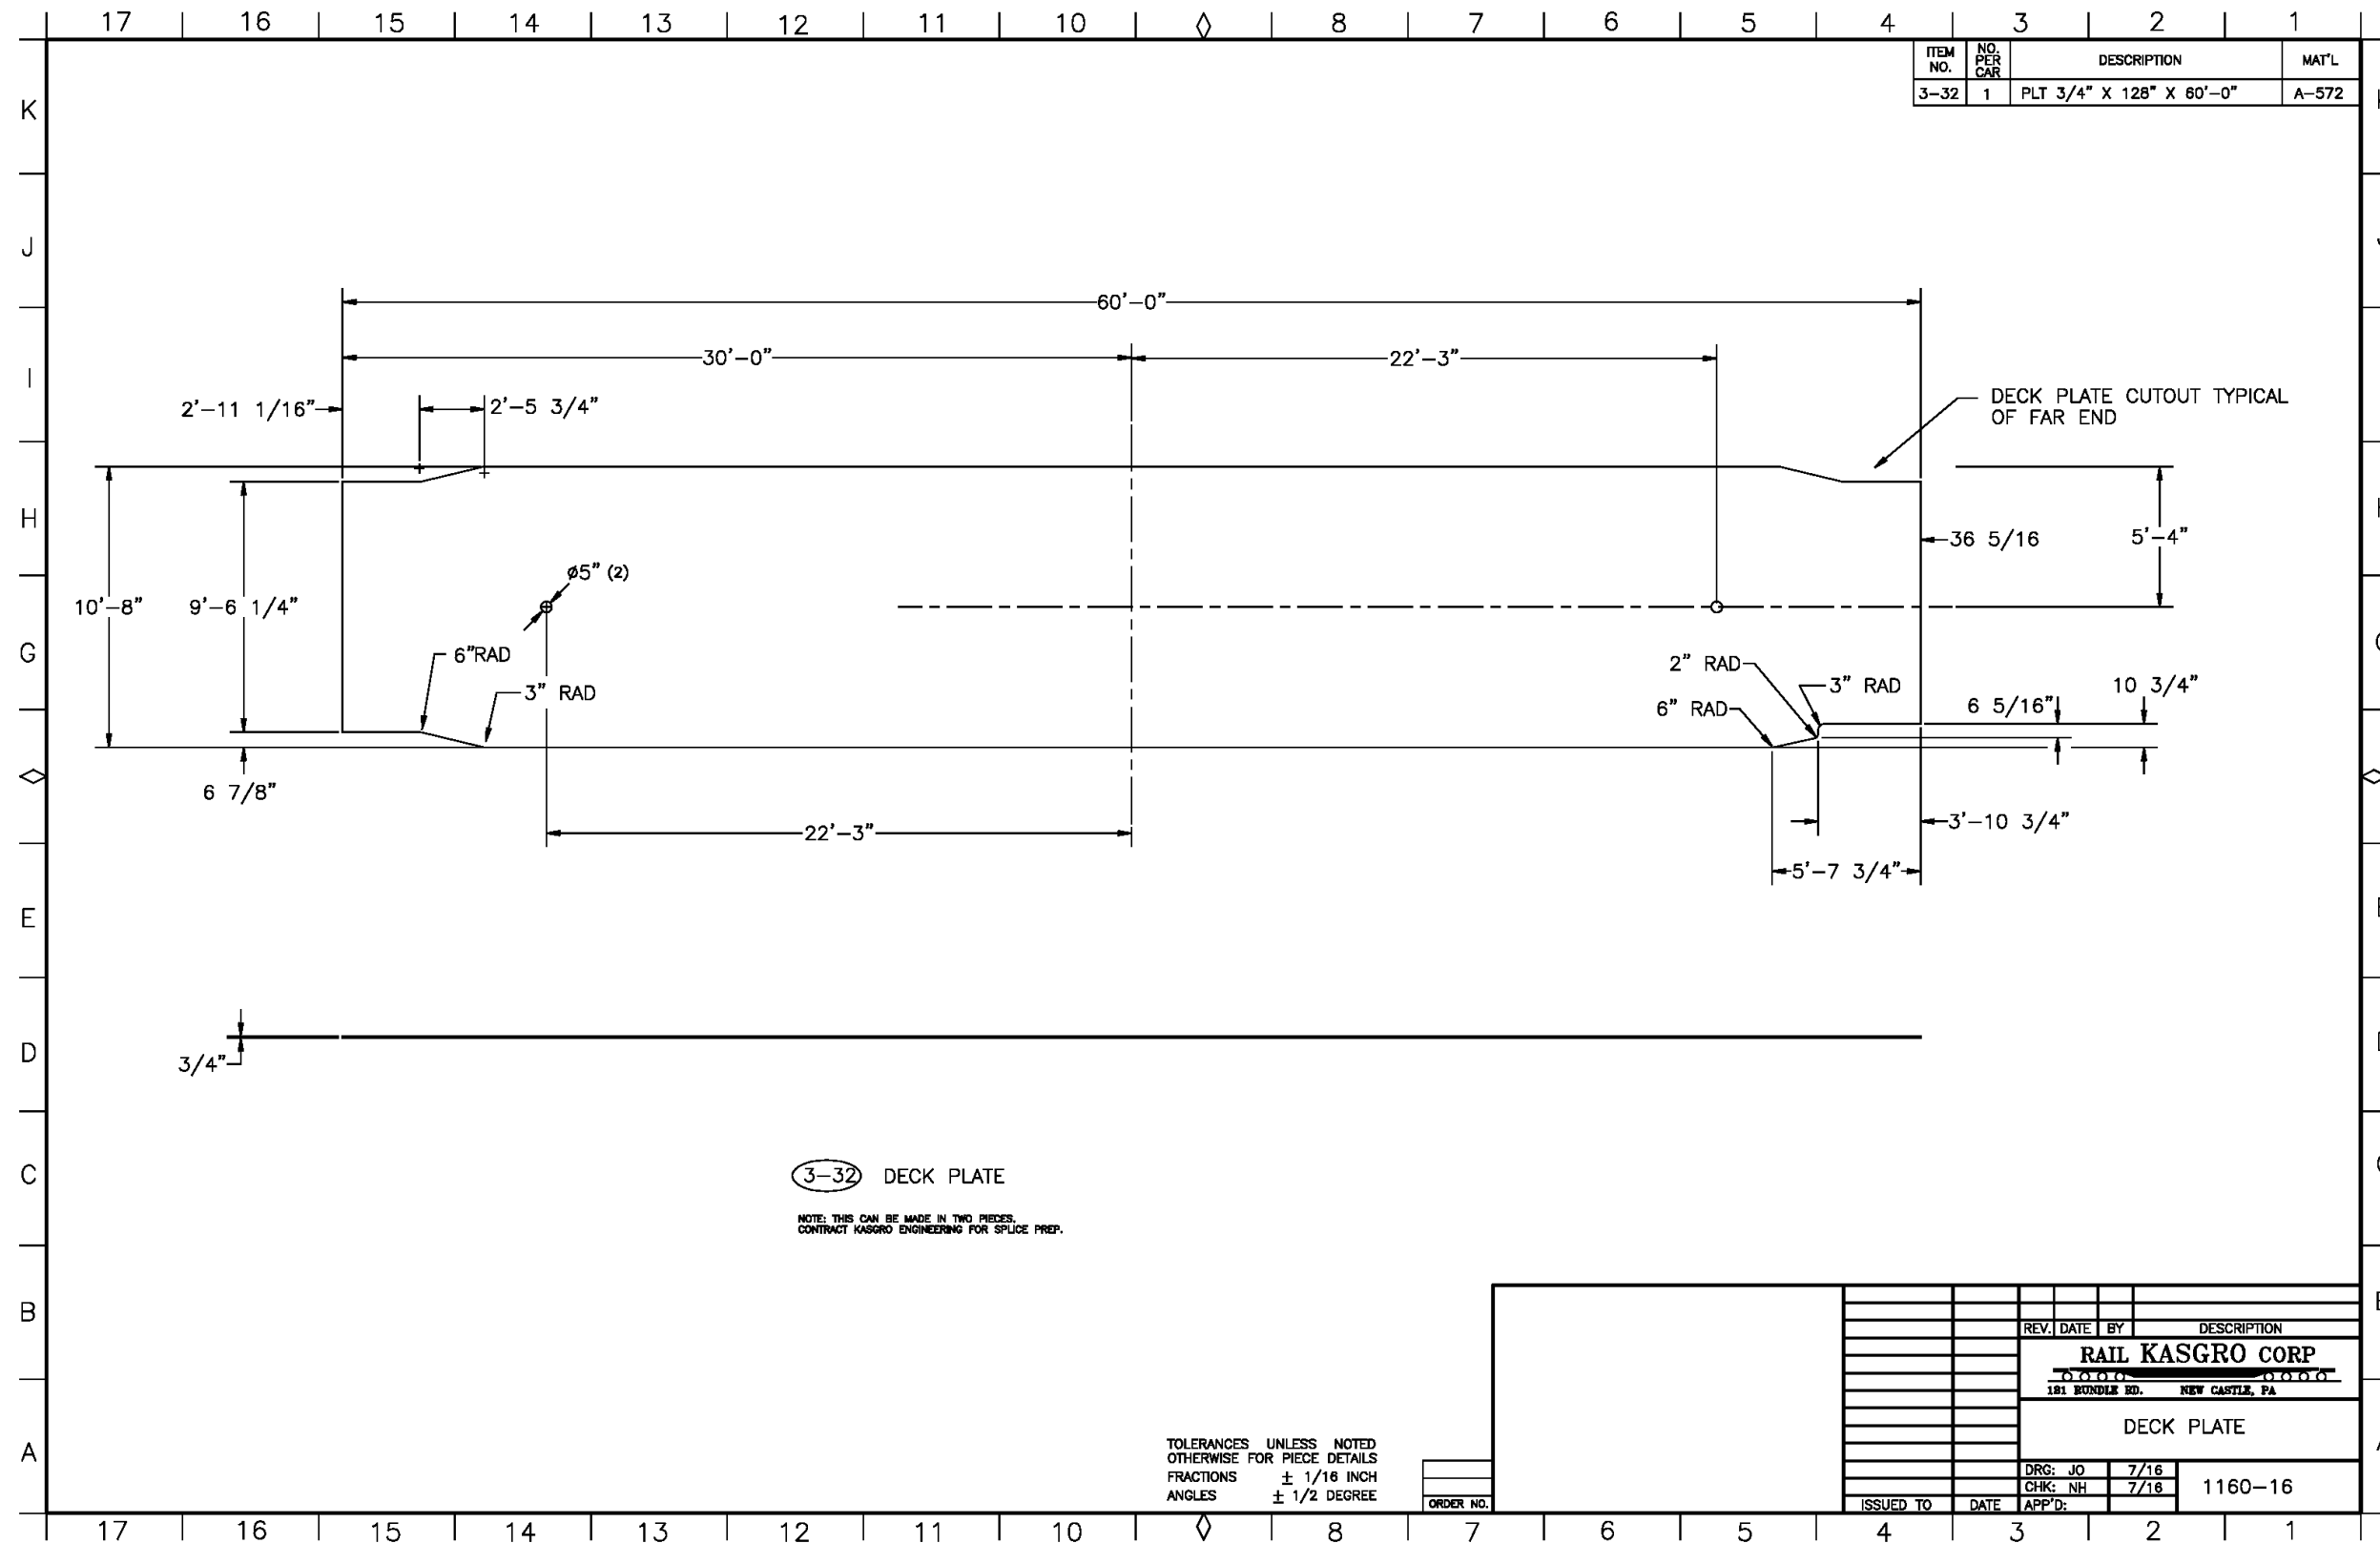


Appendix H-1.17 Steel Details

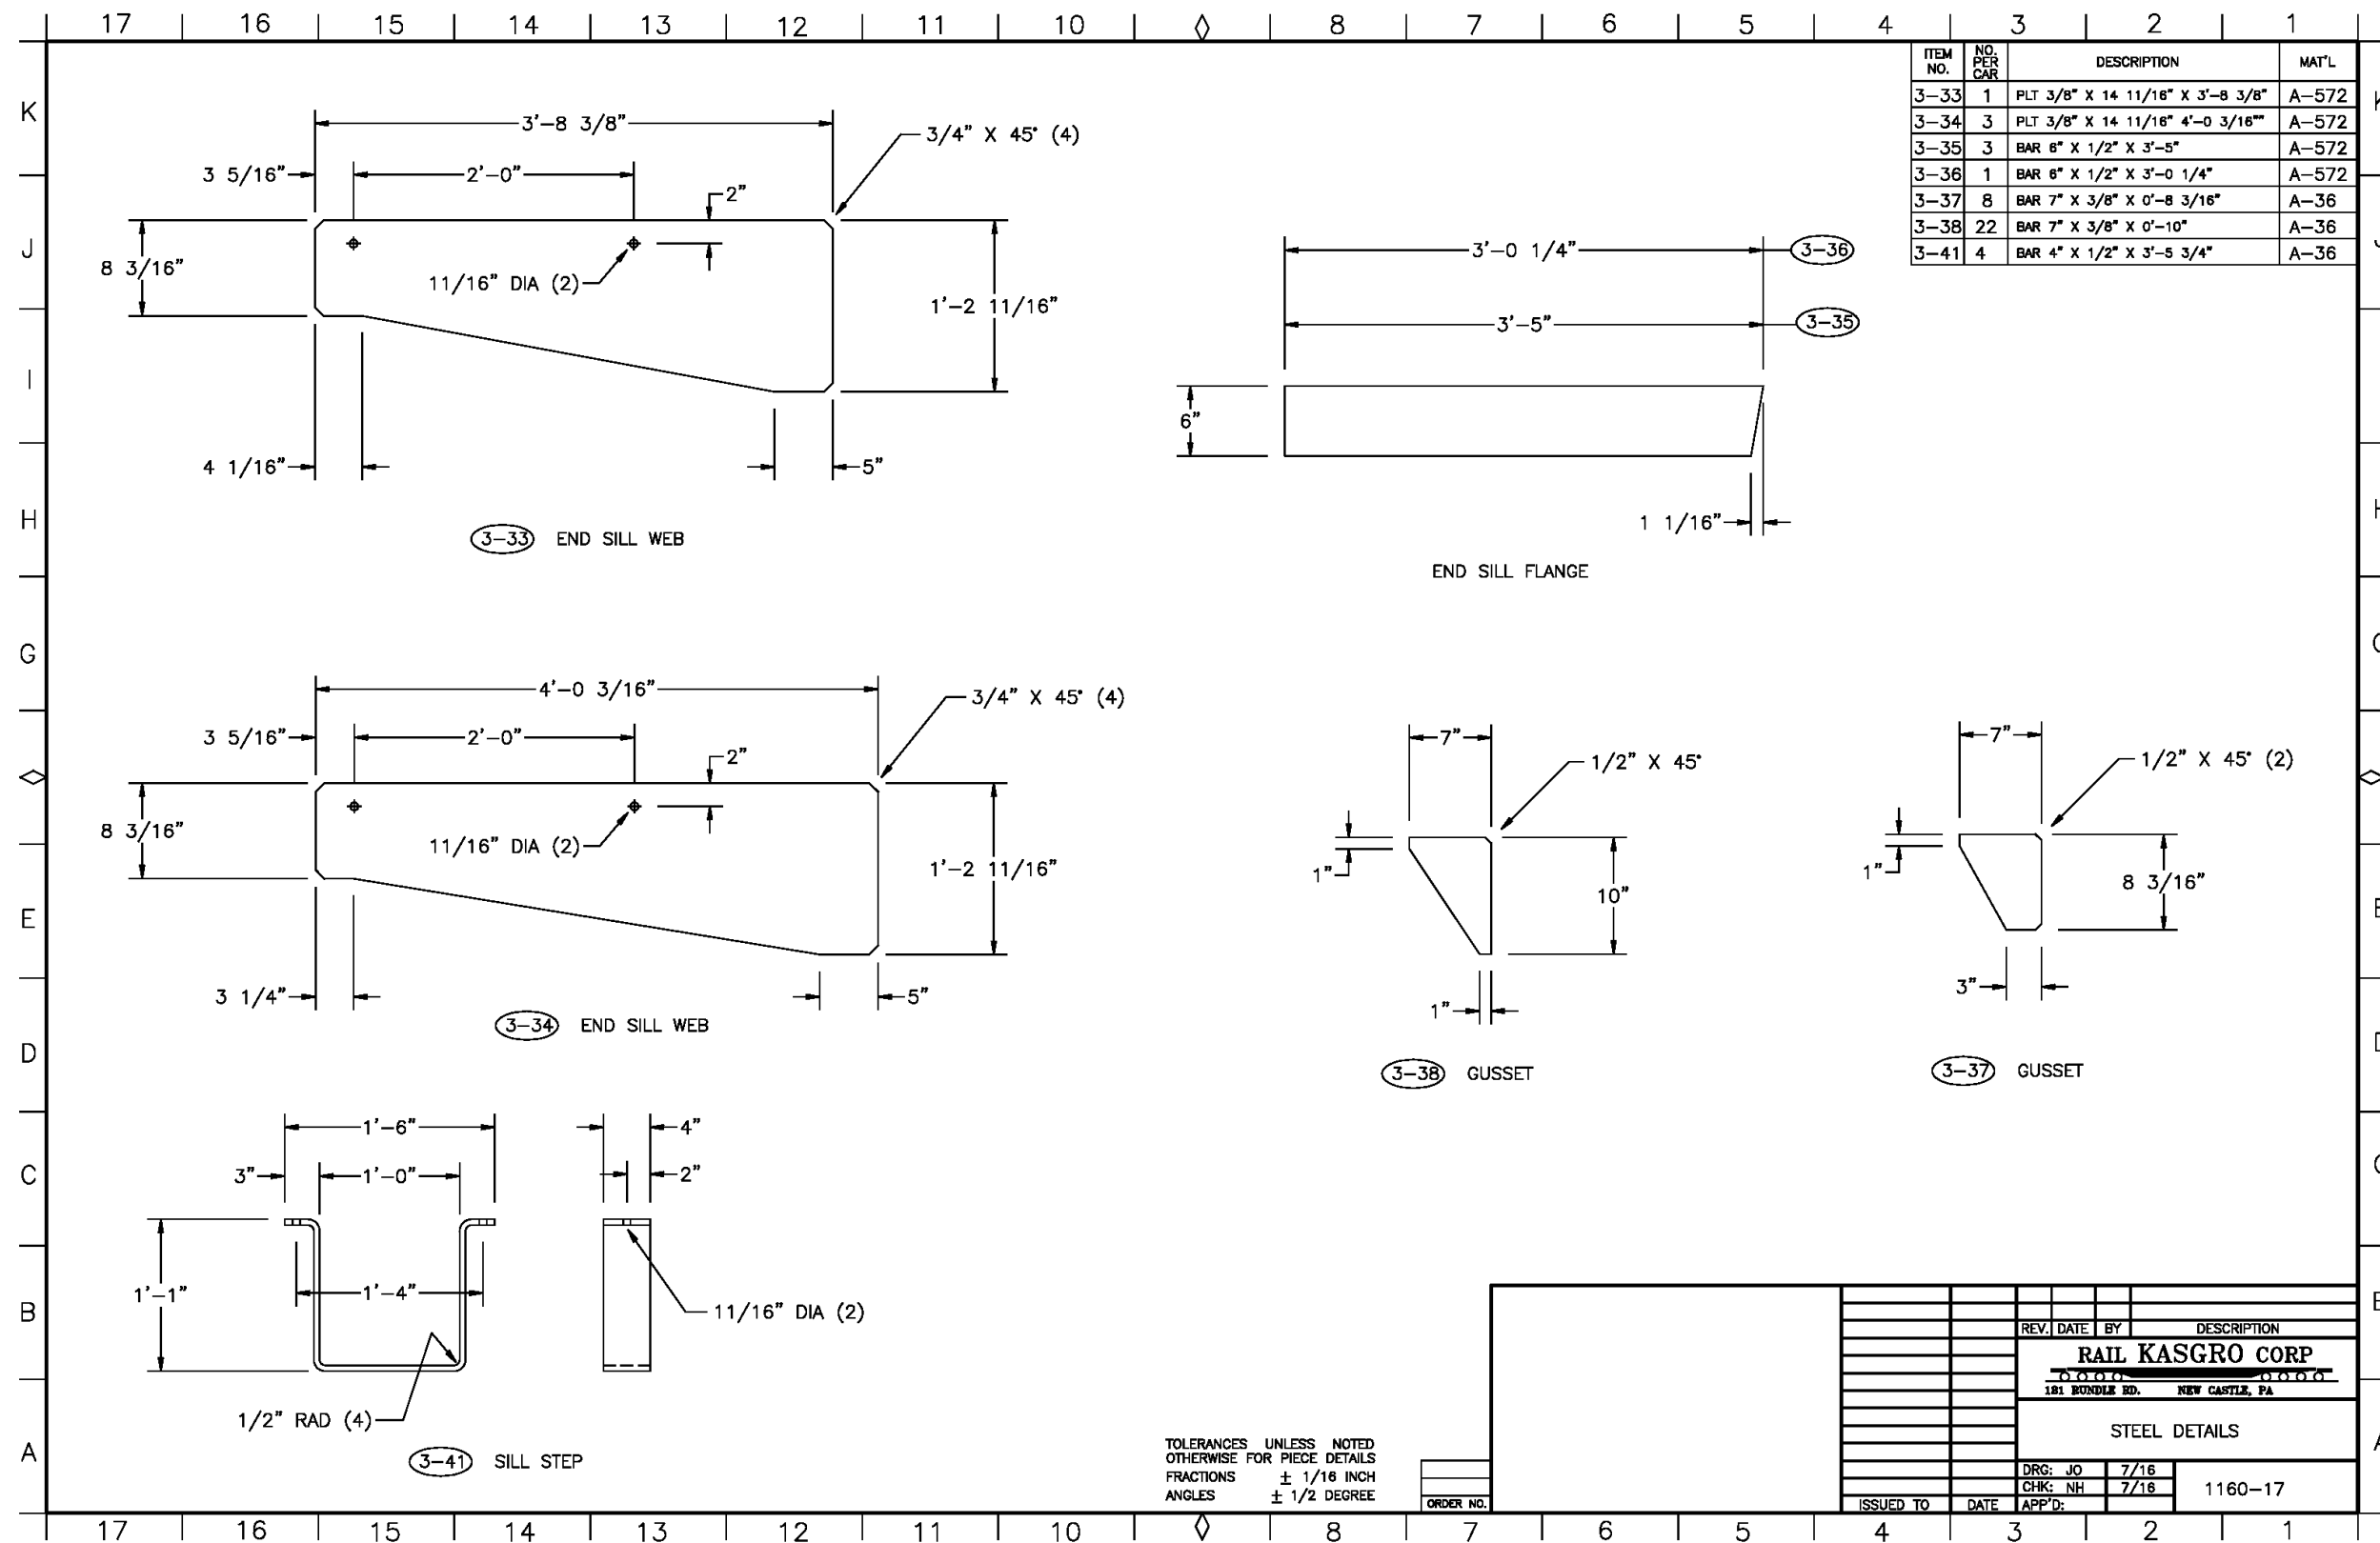

Appendix H-1.18 Steel Details

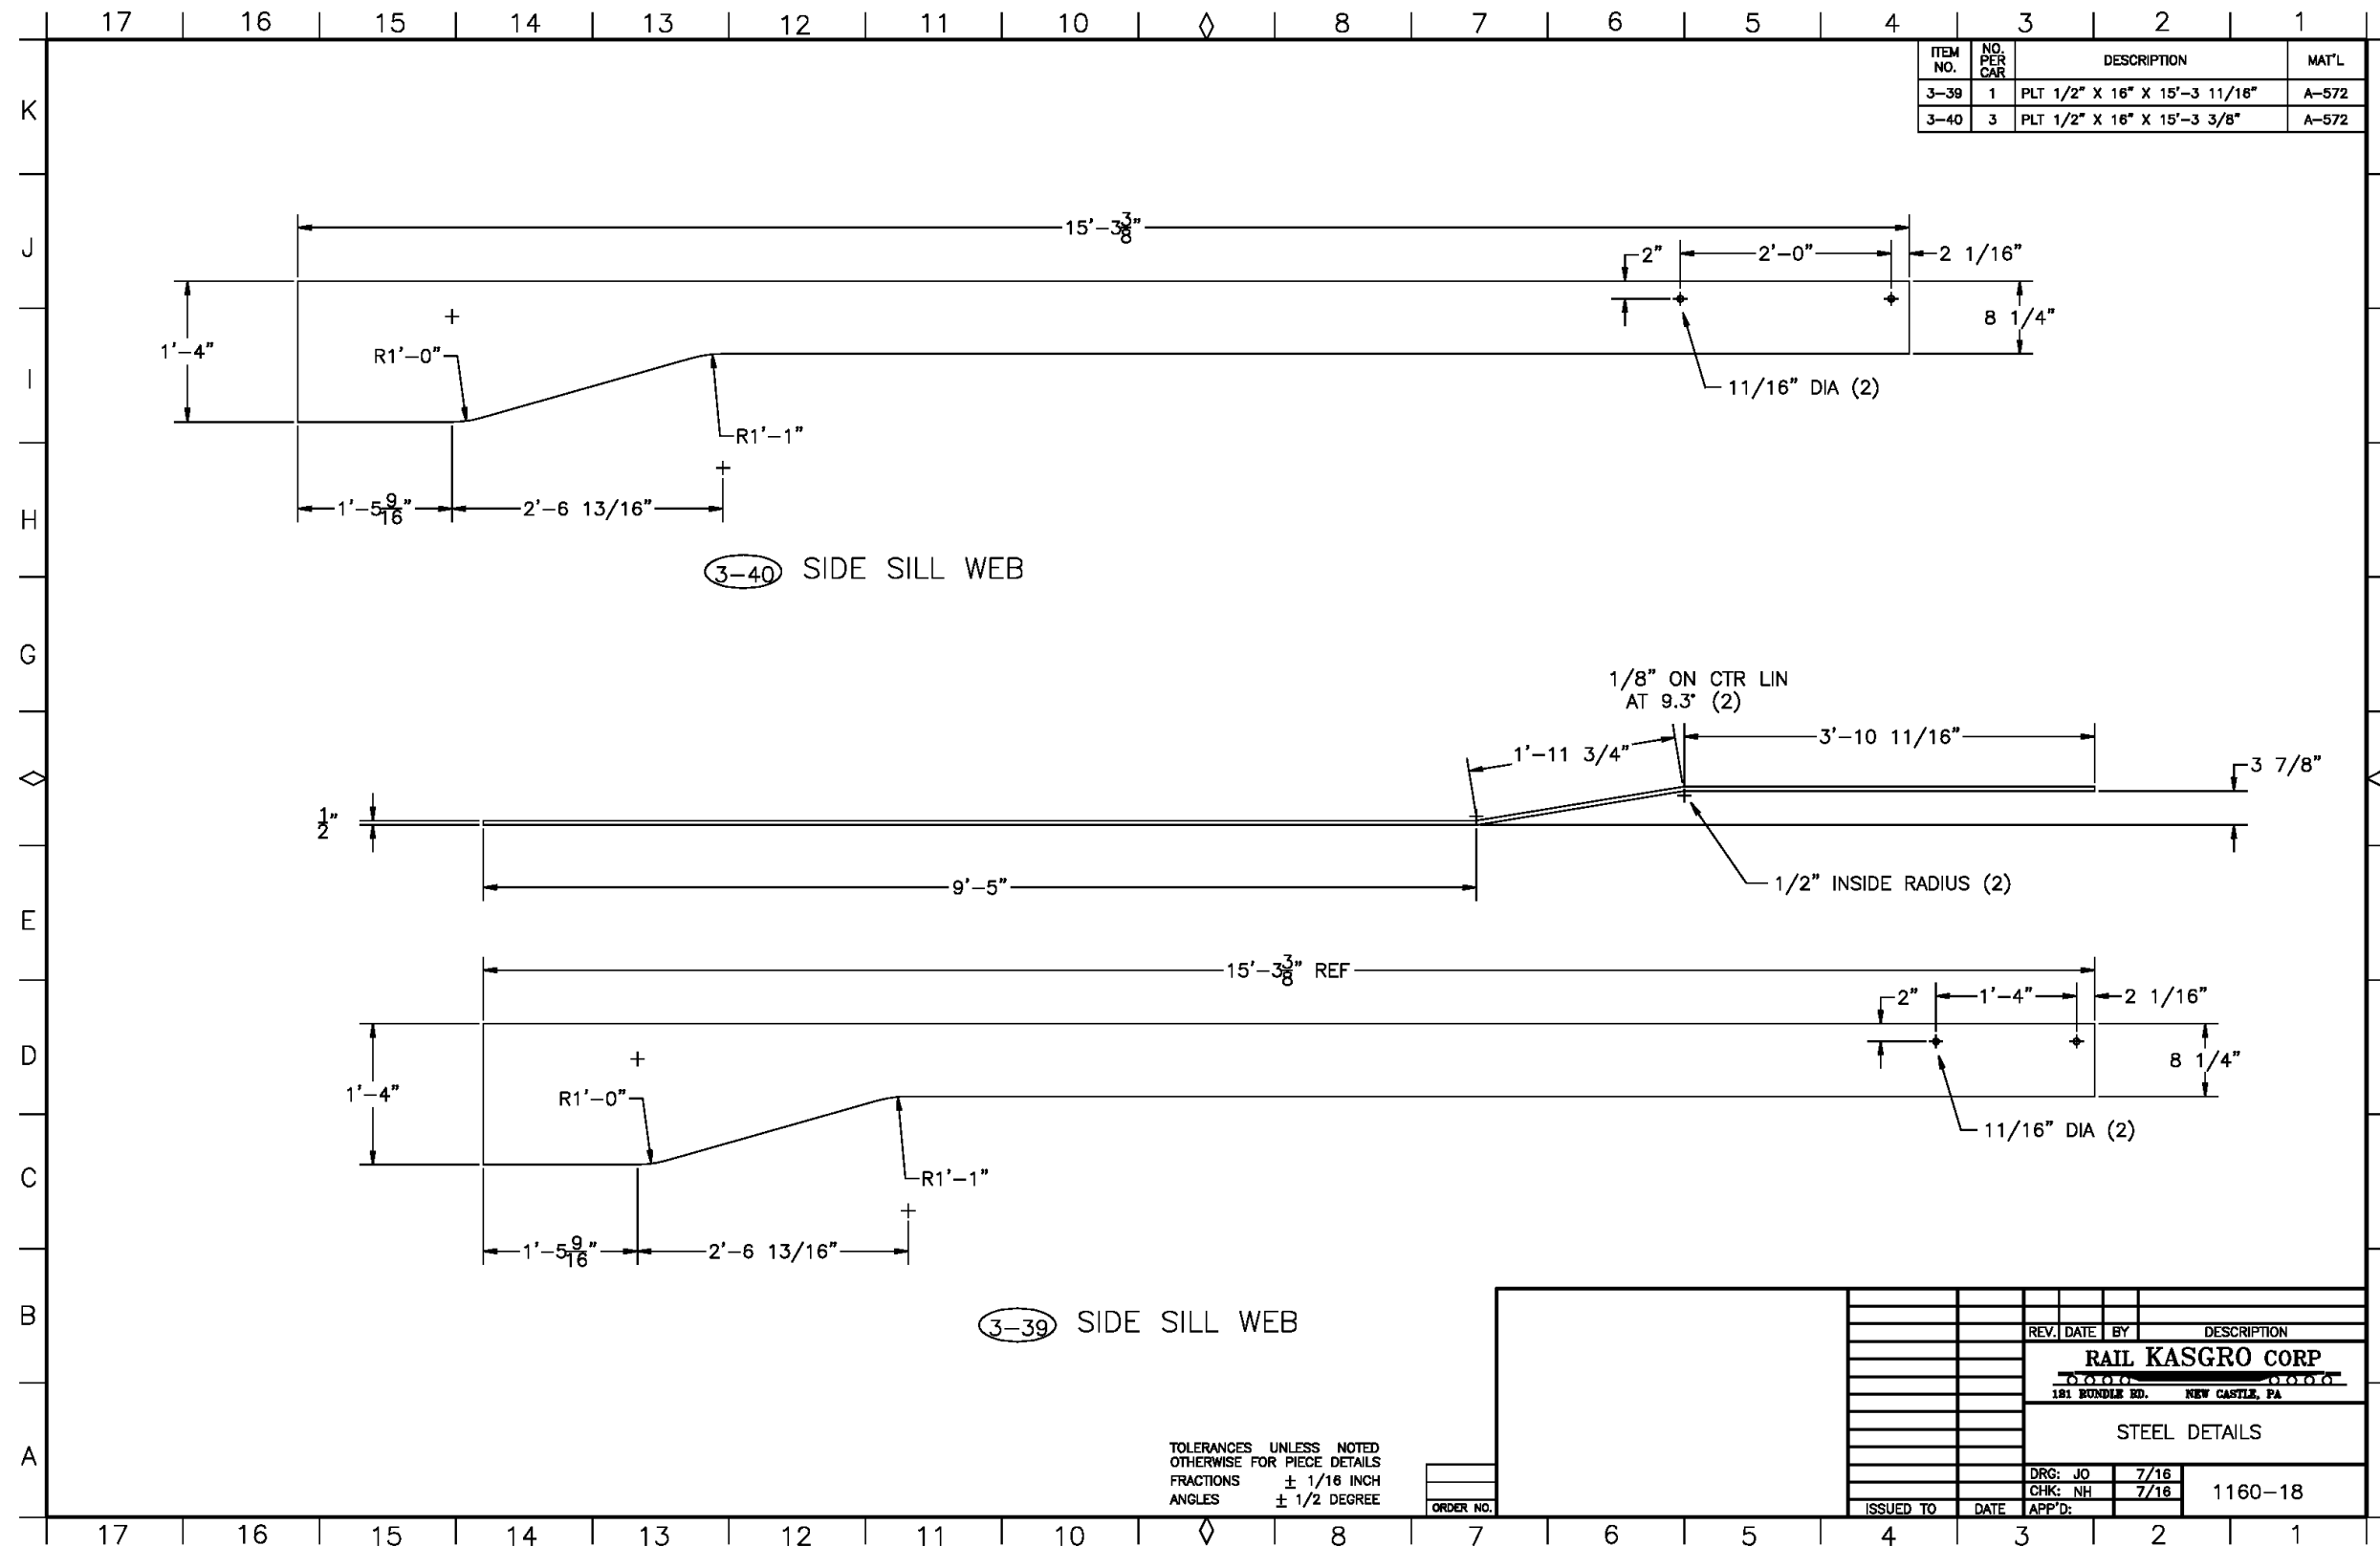

Appendix H-1.19 Hand Brake Details

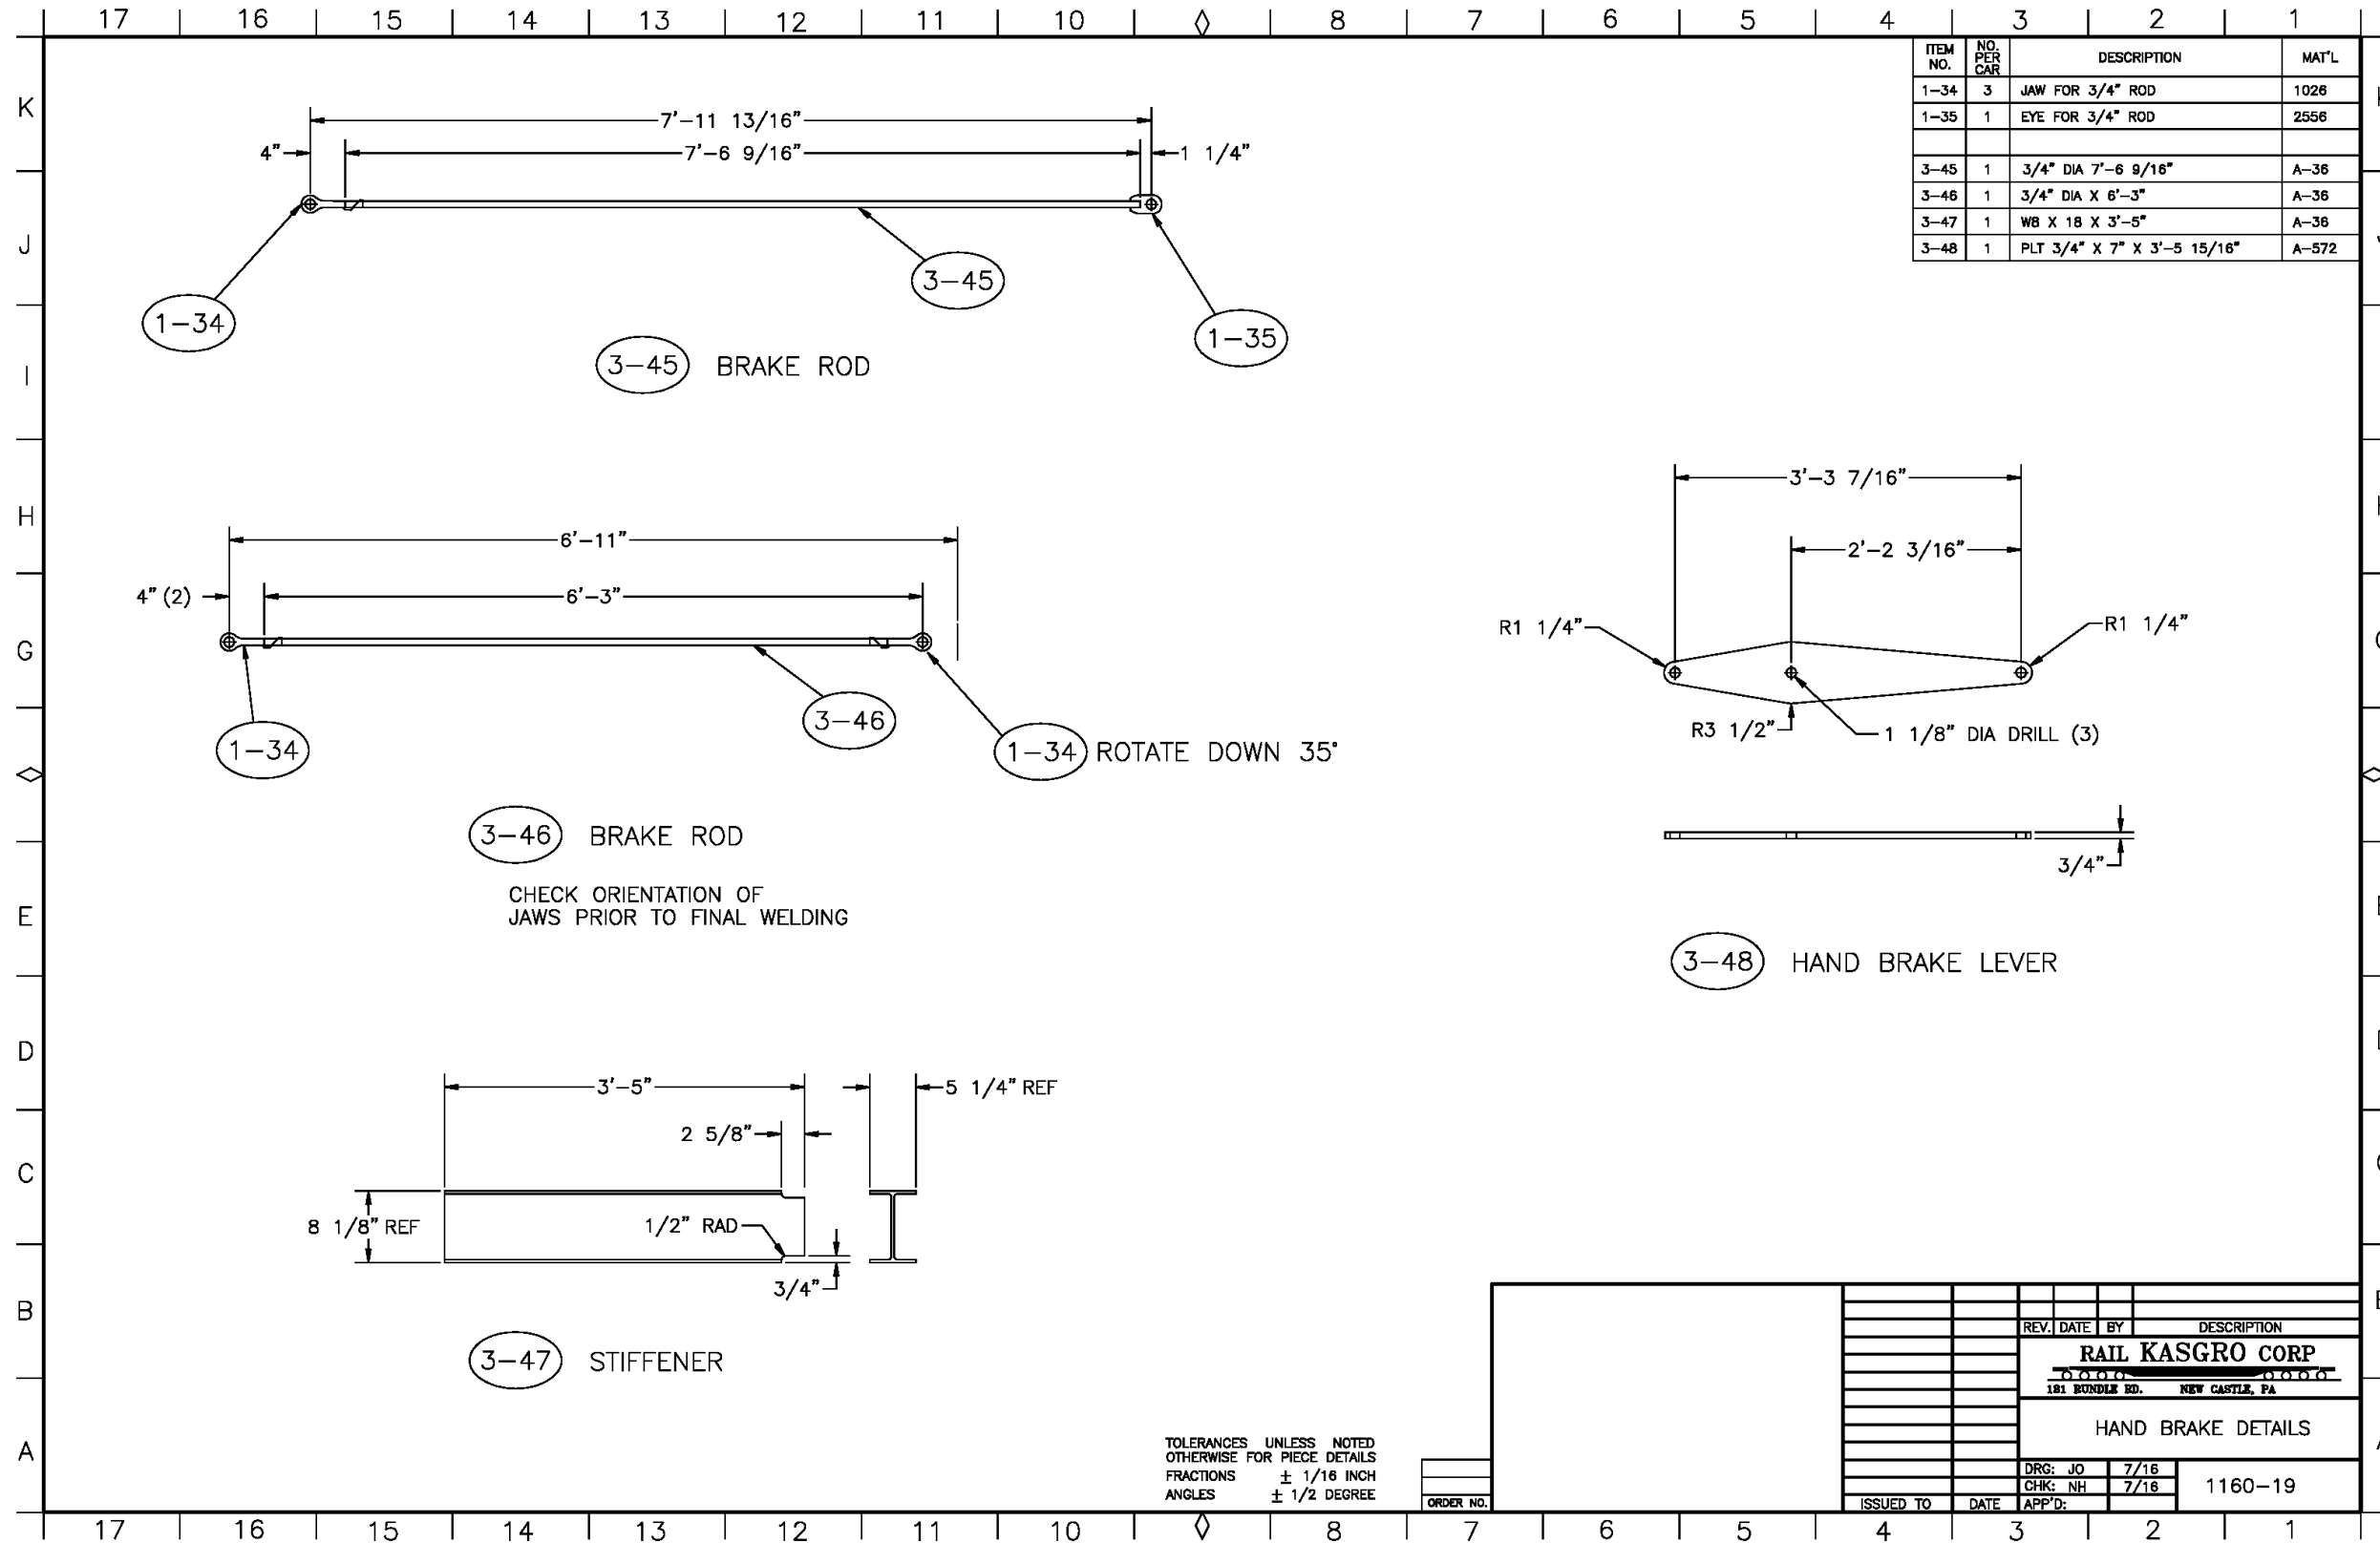


ITEM NO.	NO. PER CAR	DESCRIPTION	MAT'L
1-34	3	JAW FOR 3/4" ROD	1026
1-35	1	EYE FOR 3/4" ROD	2556
3-45	1	3/4" DIA 7'-6 9/16"	A-36
3-46	1	3/4" DIA X 6'-3"	A-36
3-47	1	WB X 18 X 3'-5"	A-36
3-48	1	PLT 3/4" X 7" X 3'-5 15/16"	A-572

REV.	DATE	BY	DESCRIPTION

**RAIL KASGRO CORP**  
 181 BUNDLER RD. NEW CASTLE, PA  
**HAND BRAKE DETAILS**  
 DRG: JO 7/16  
 CHK: NH 7/16  
 APP'D: 1160-19

Appendix H-1.20 Brake Badge Plate

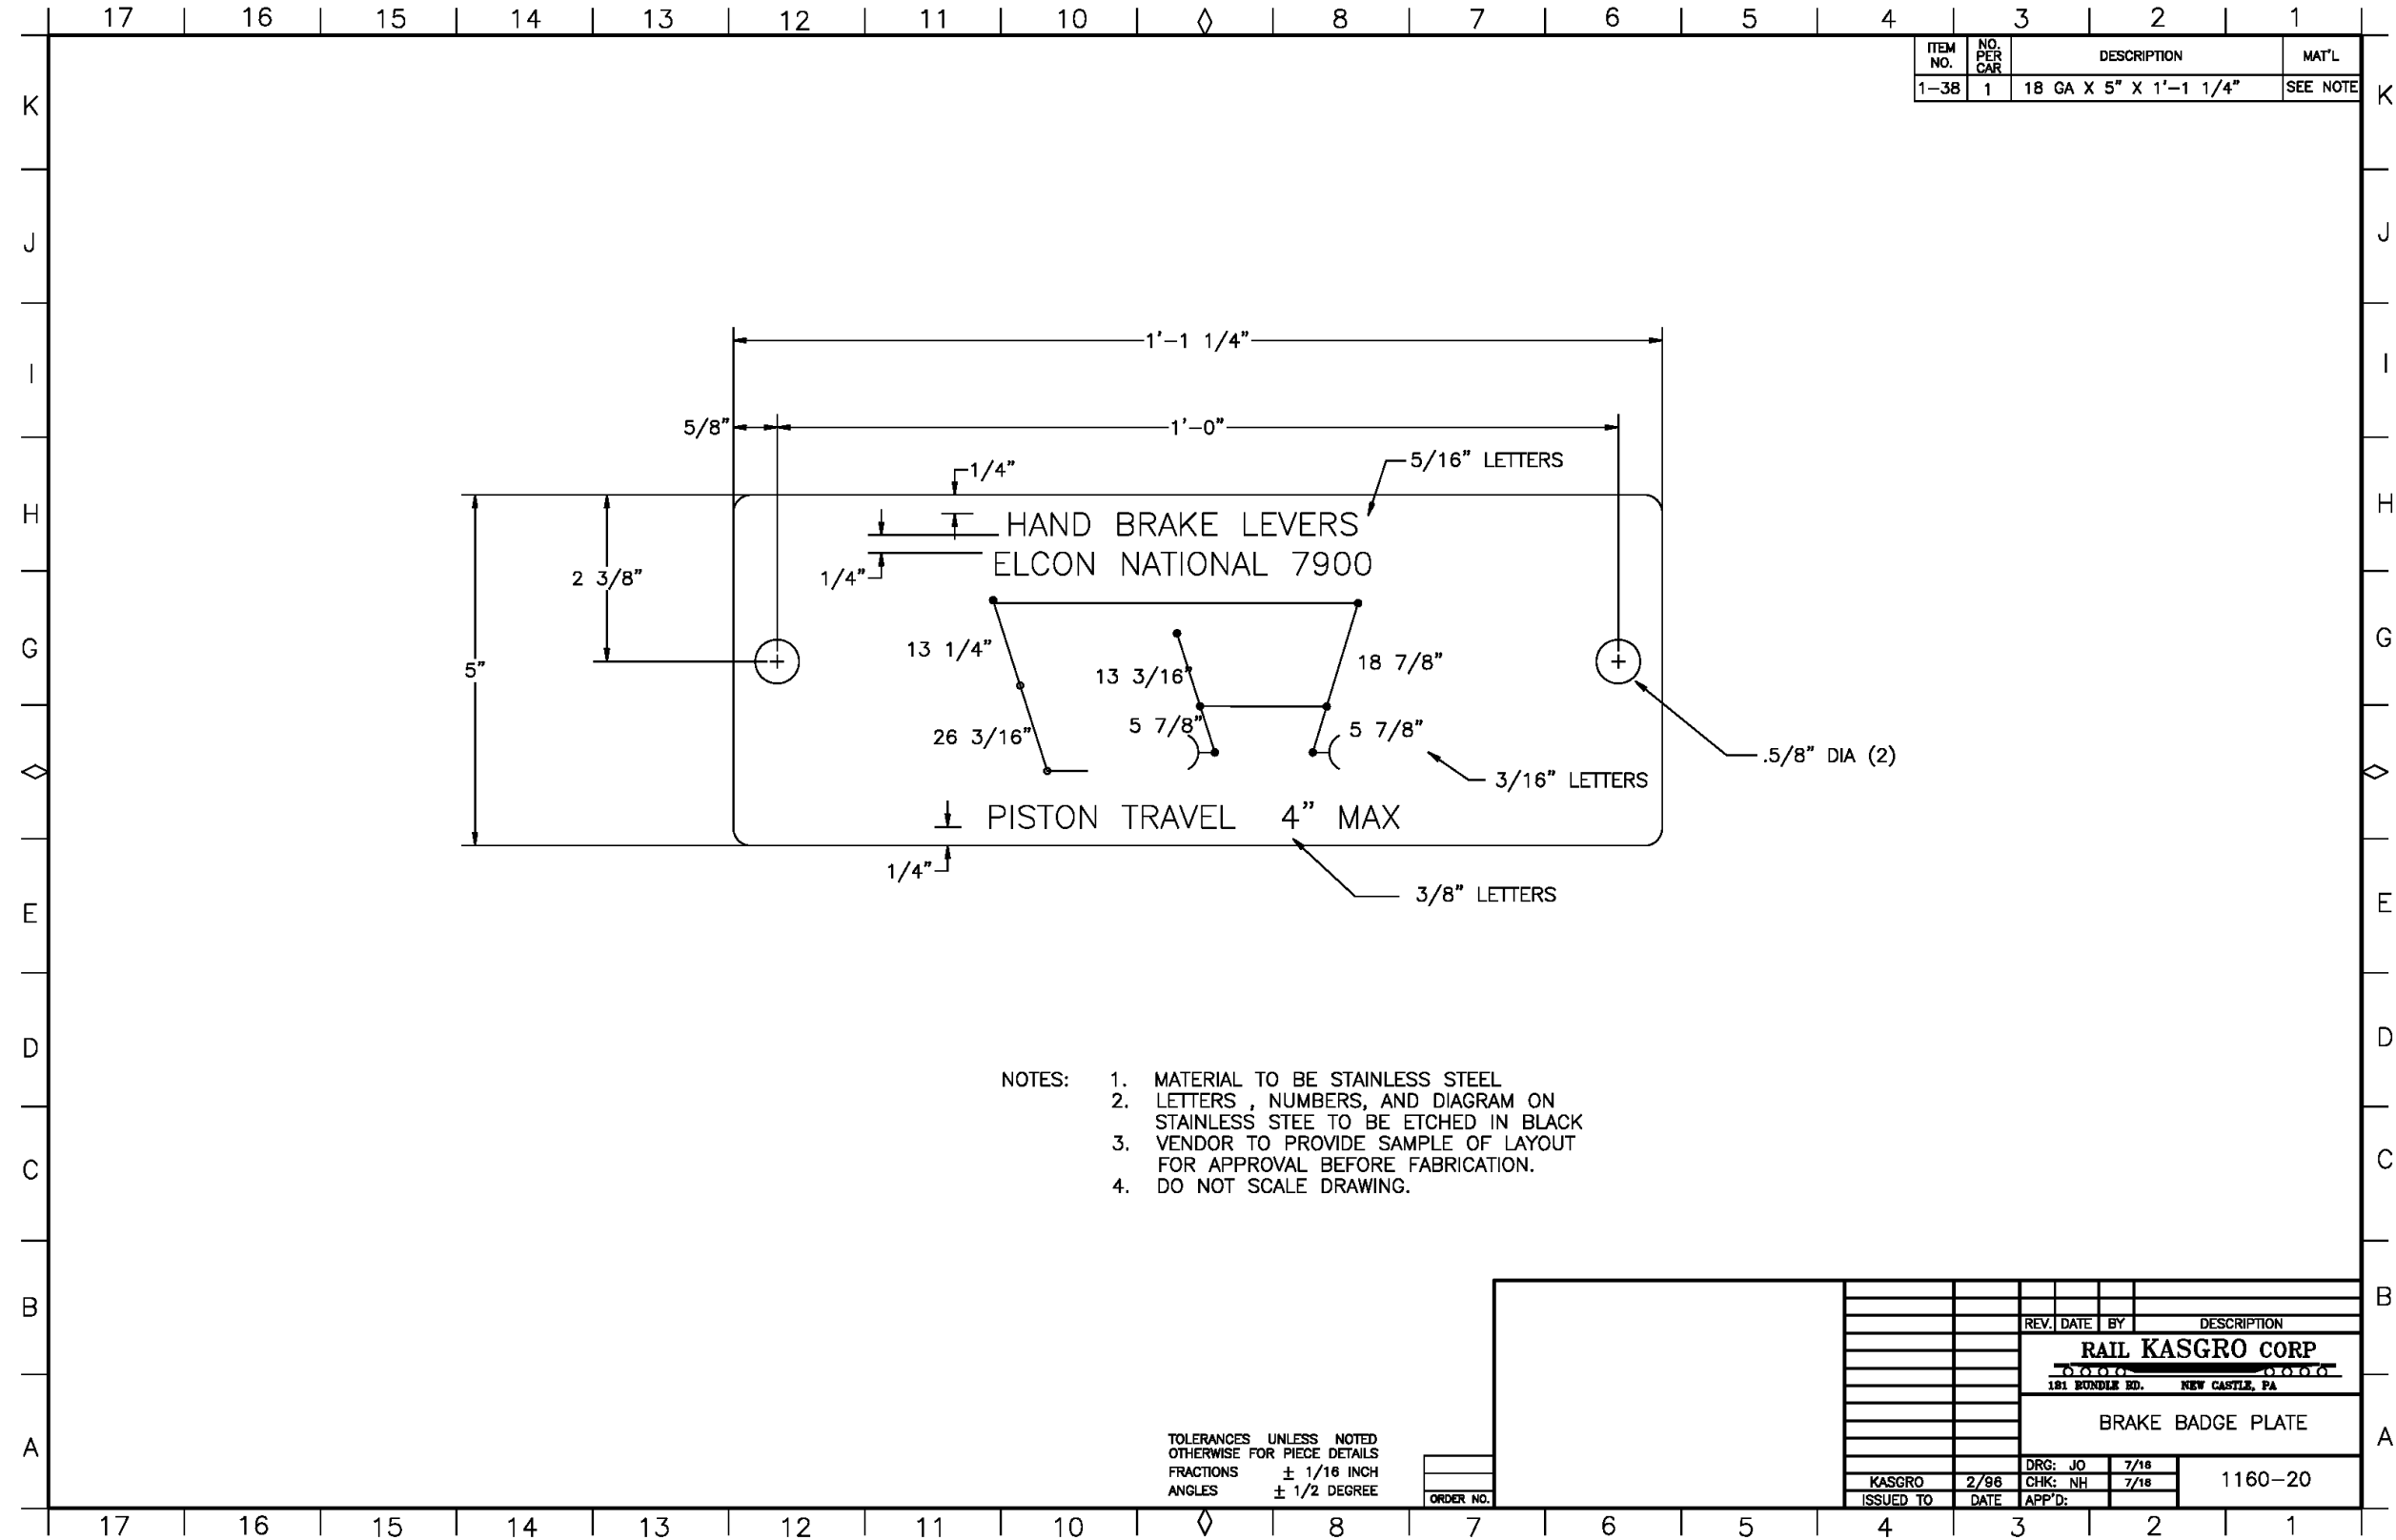


ITEM NO.	NO. PER CAR	DESCRIPTION	MAT'L
1-38	1	18 GA X 5" X 1'-1 1/4"	SEE NOTE

- NOTES:
1. MATERIAL TO BE STAINLESS STEEL
  2. LETTERS , NUMBERS, AND DIAGRAM ON STAINLESS STEE TO BE ETCHED IN BLACK
  3. VENDOR TO PROVIDE SAMPLE OF LAYOUT FOR APPROVAL BEFORE FABRICATION.
  4. DO NOT SCALE DRAWING.


TOLERANCES UNLESS NOTED OTHERWISE FOR PIECE DETAILS  
 FRACTIONS ± 1/16 INCH  
 ANGLES ± 1/2 DEGREE

REV. DATE BY		DESCRIPTION	
<b>RAIL KASGRO CORP</b>			
181 BUNDIE RD. NEW CASTLE, PA			
BRAKE BADGE PLATE			
DRG: JO	7/18		
KASGRO	2/98	CHK: NH	7/18
ISSUED TO	DATE	APP'D:	1160-20


Appendix H-1.21 Hand Brake Steel Details

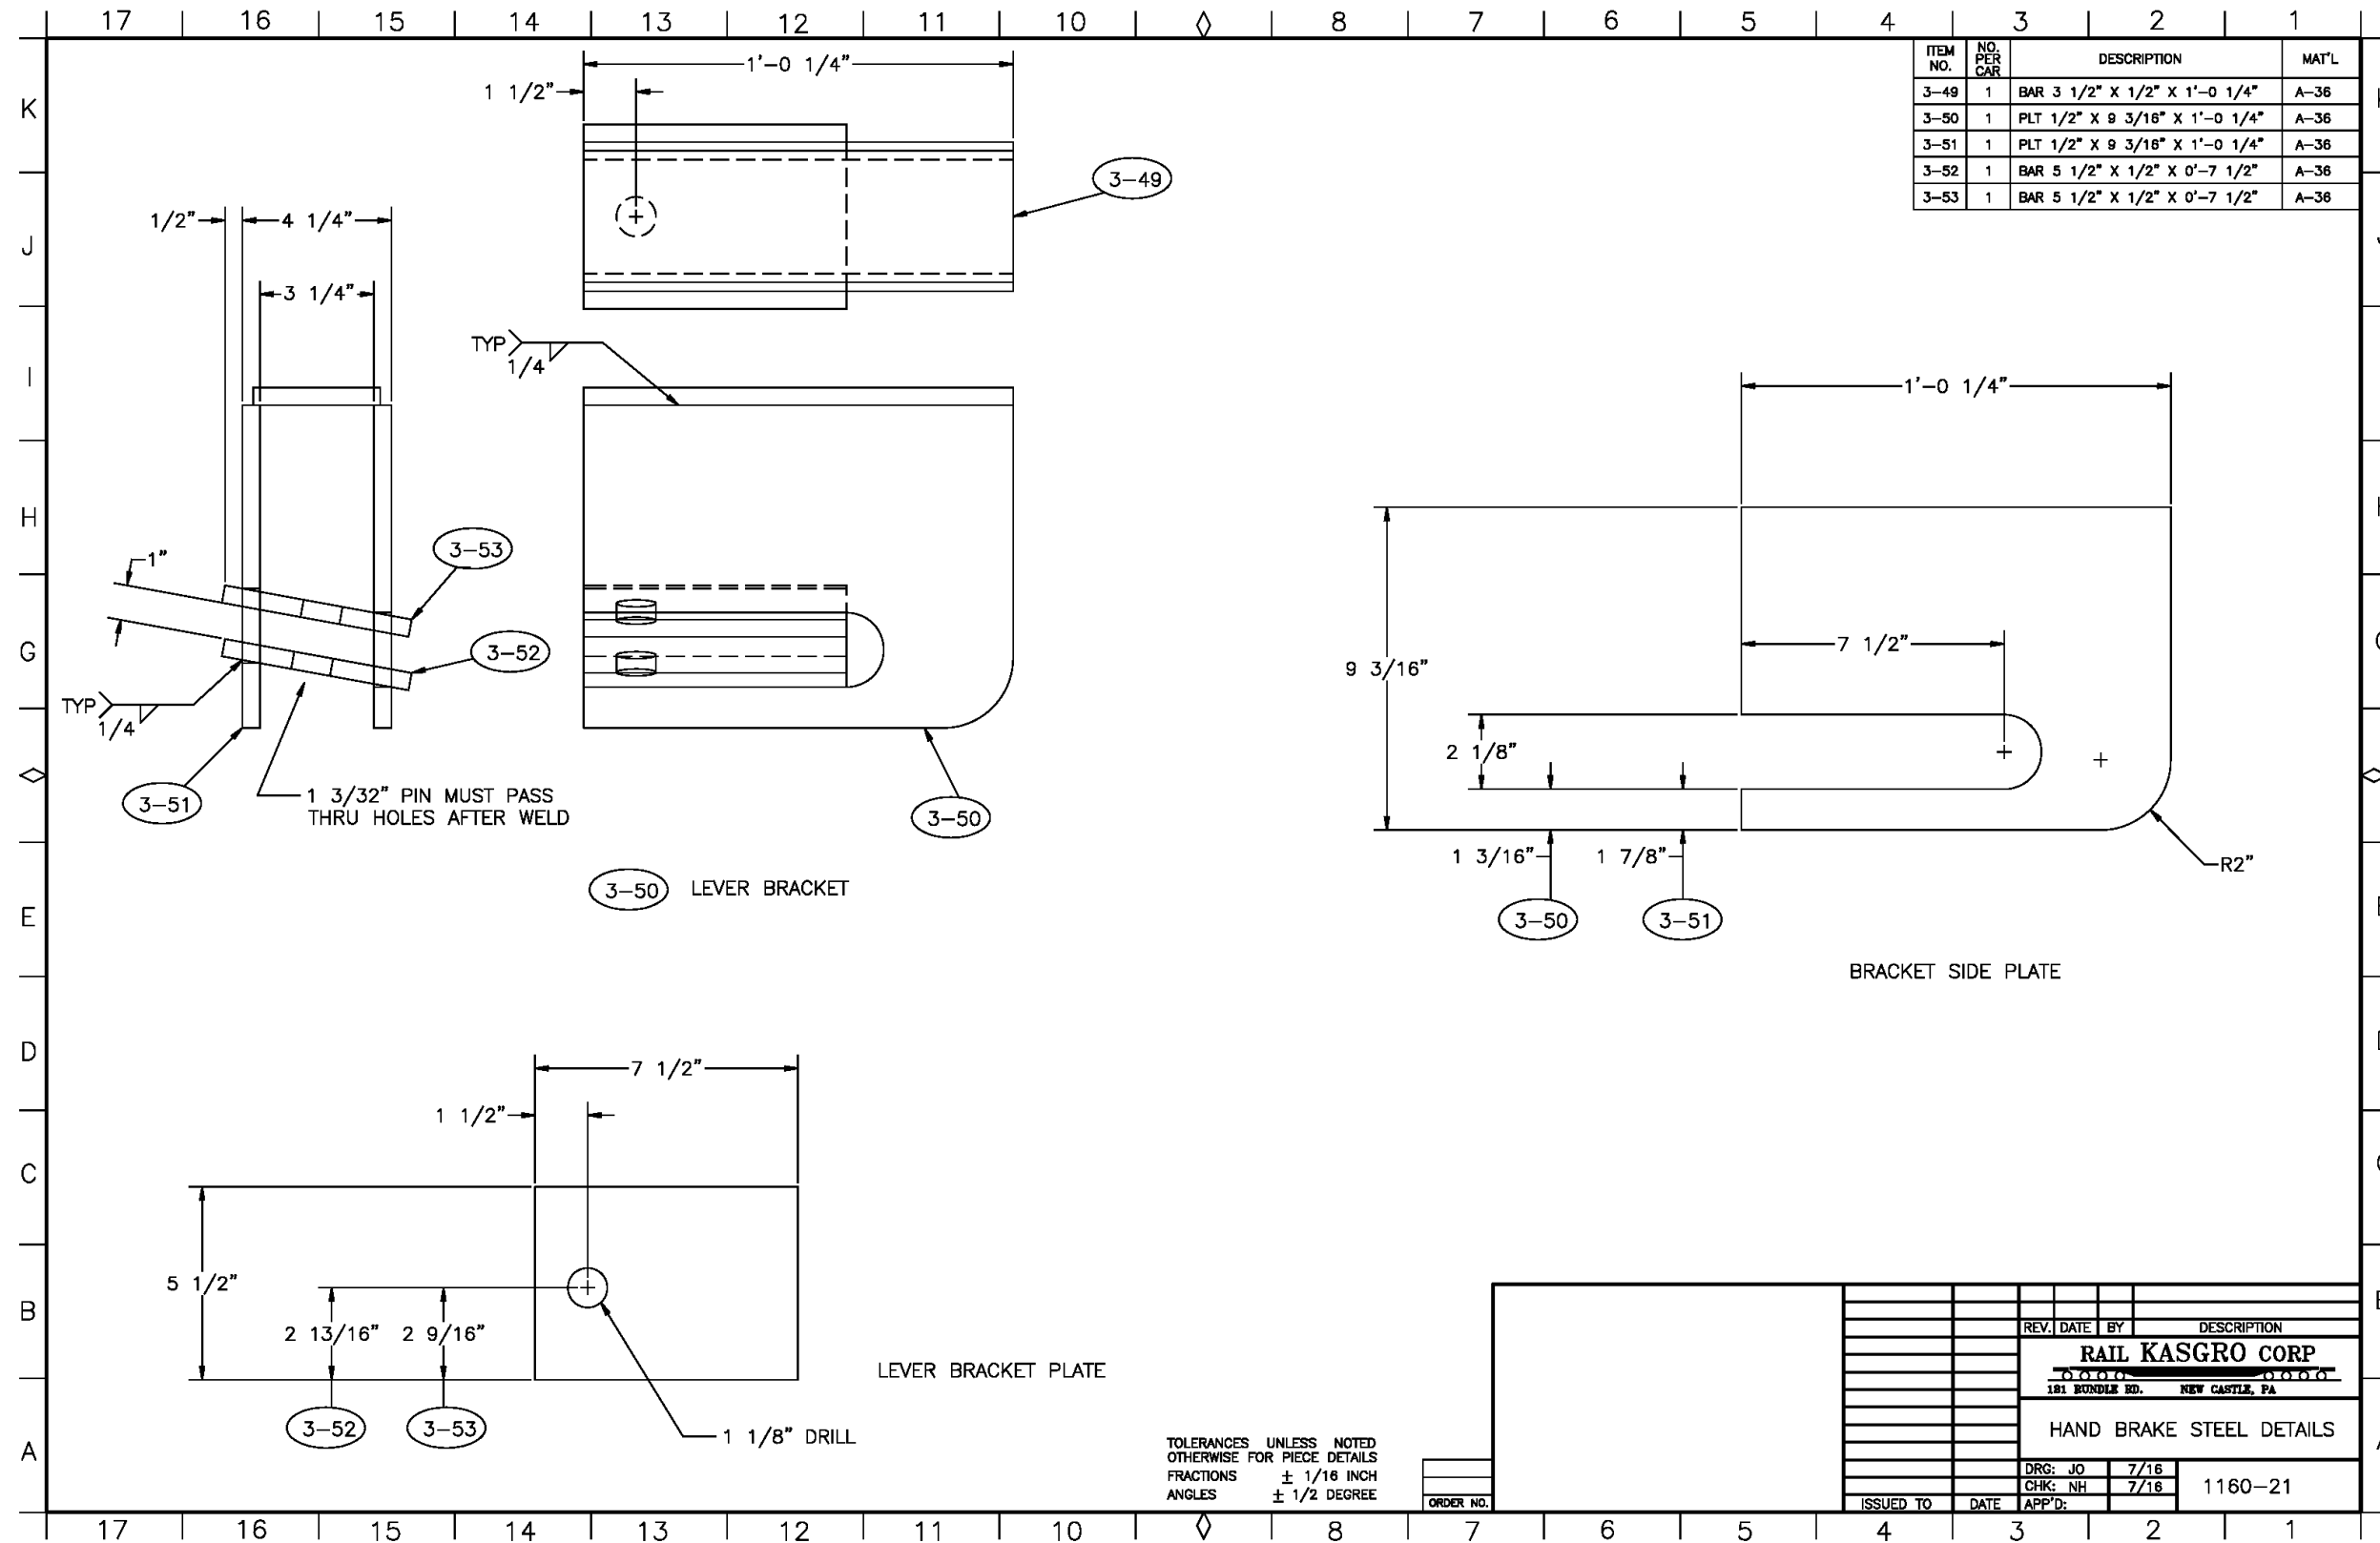


Appendix H-1.22 Hand Brake Details

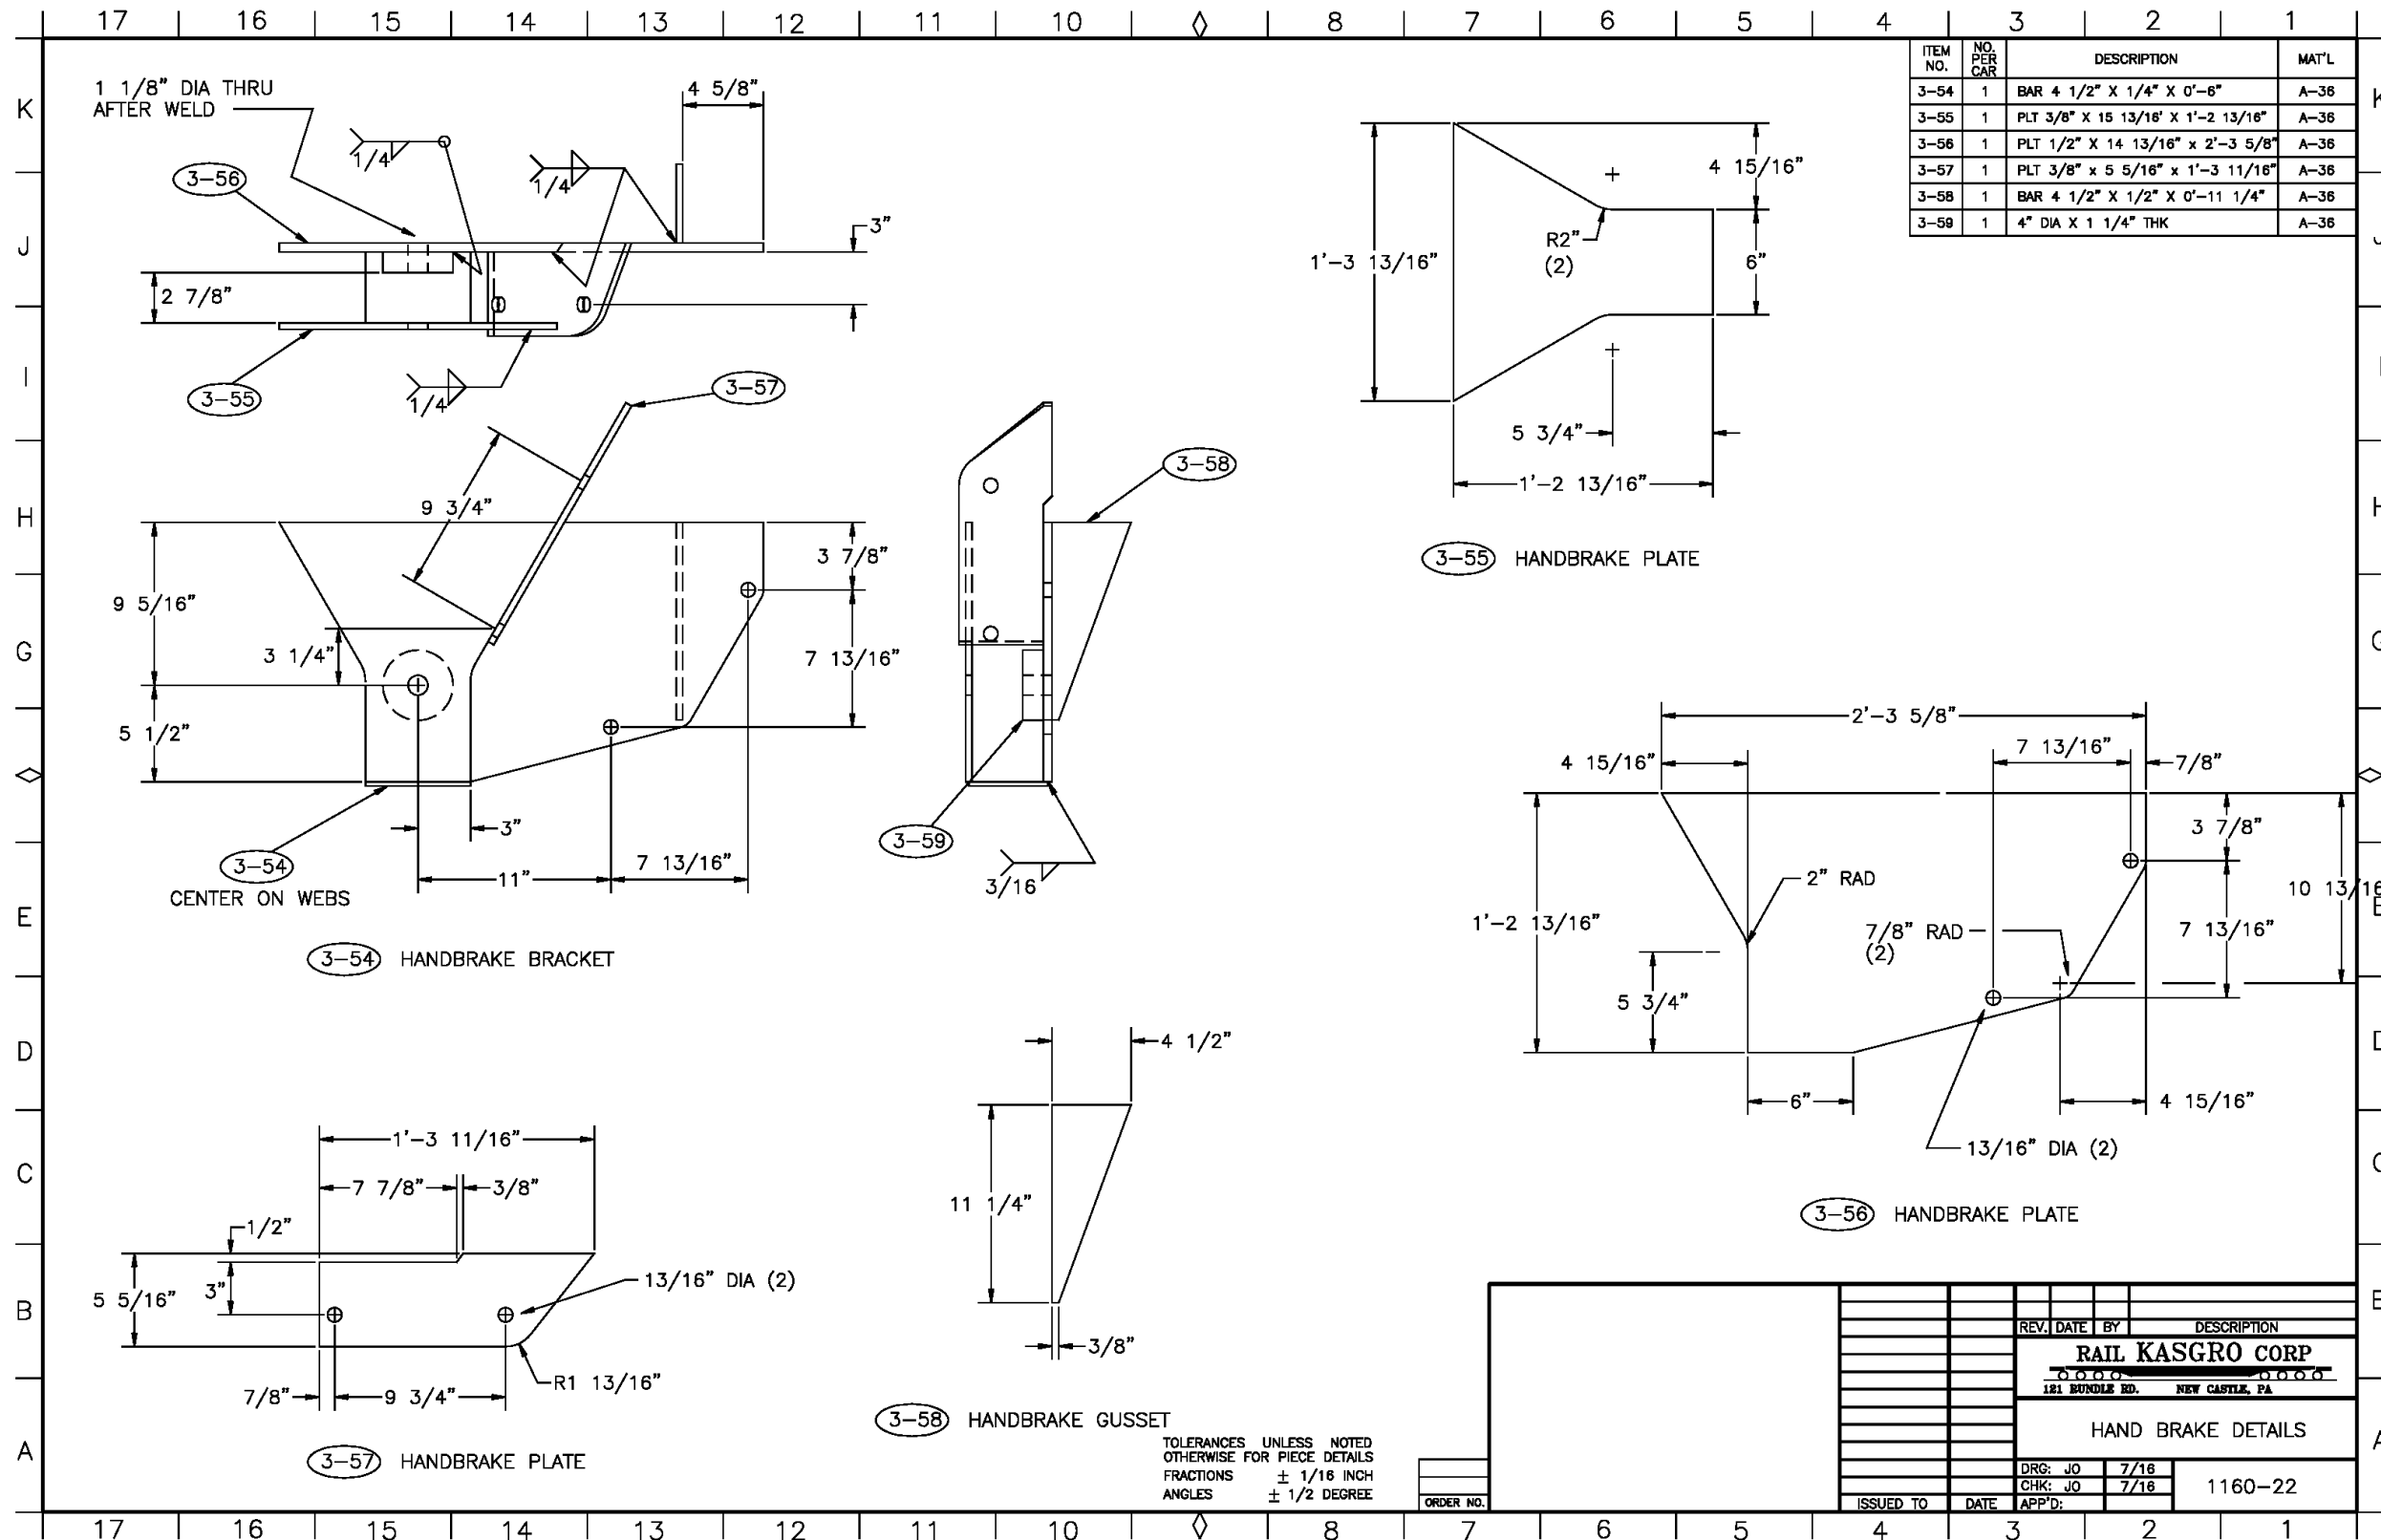


Appendix H-1.23 Air Brake Steel Details

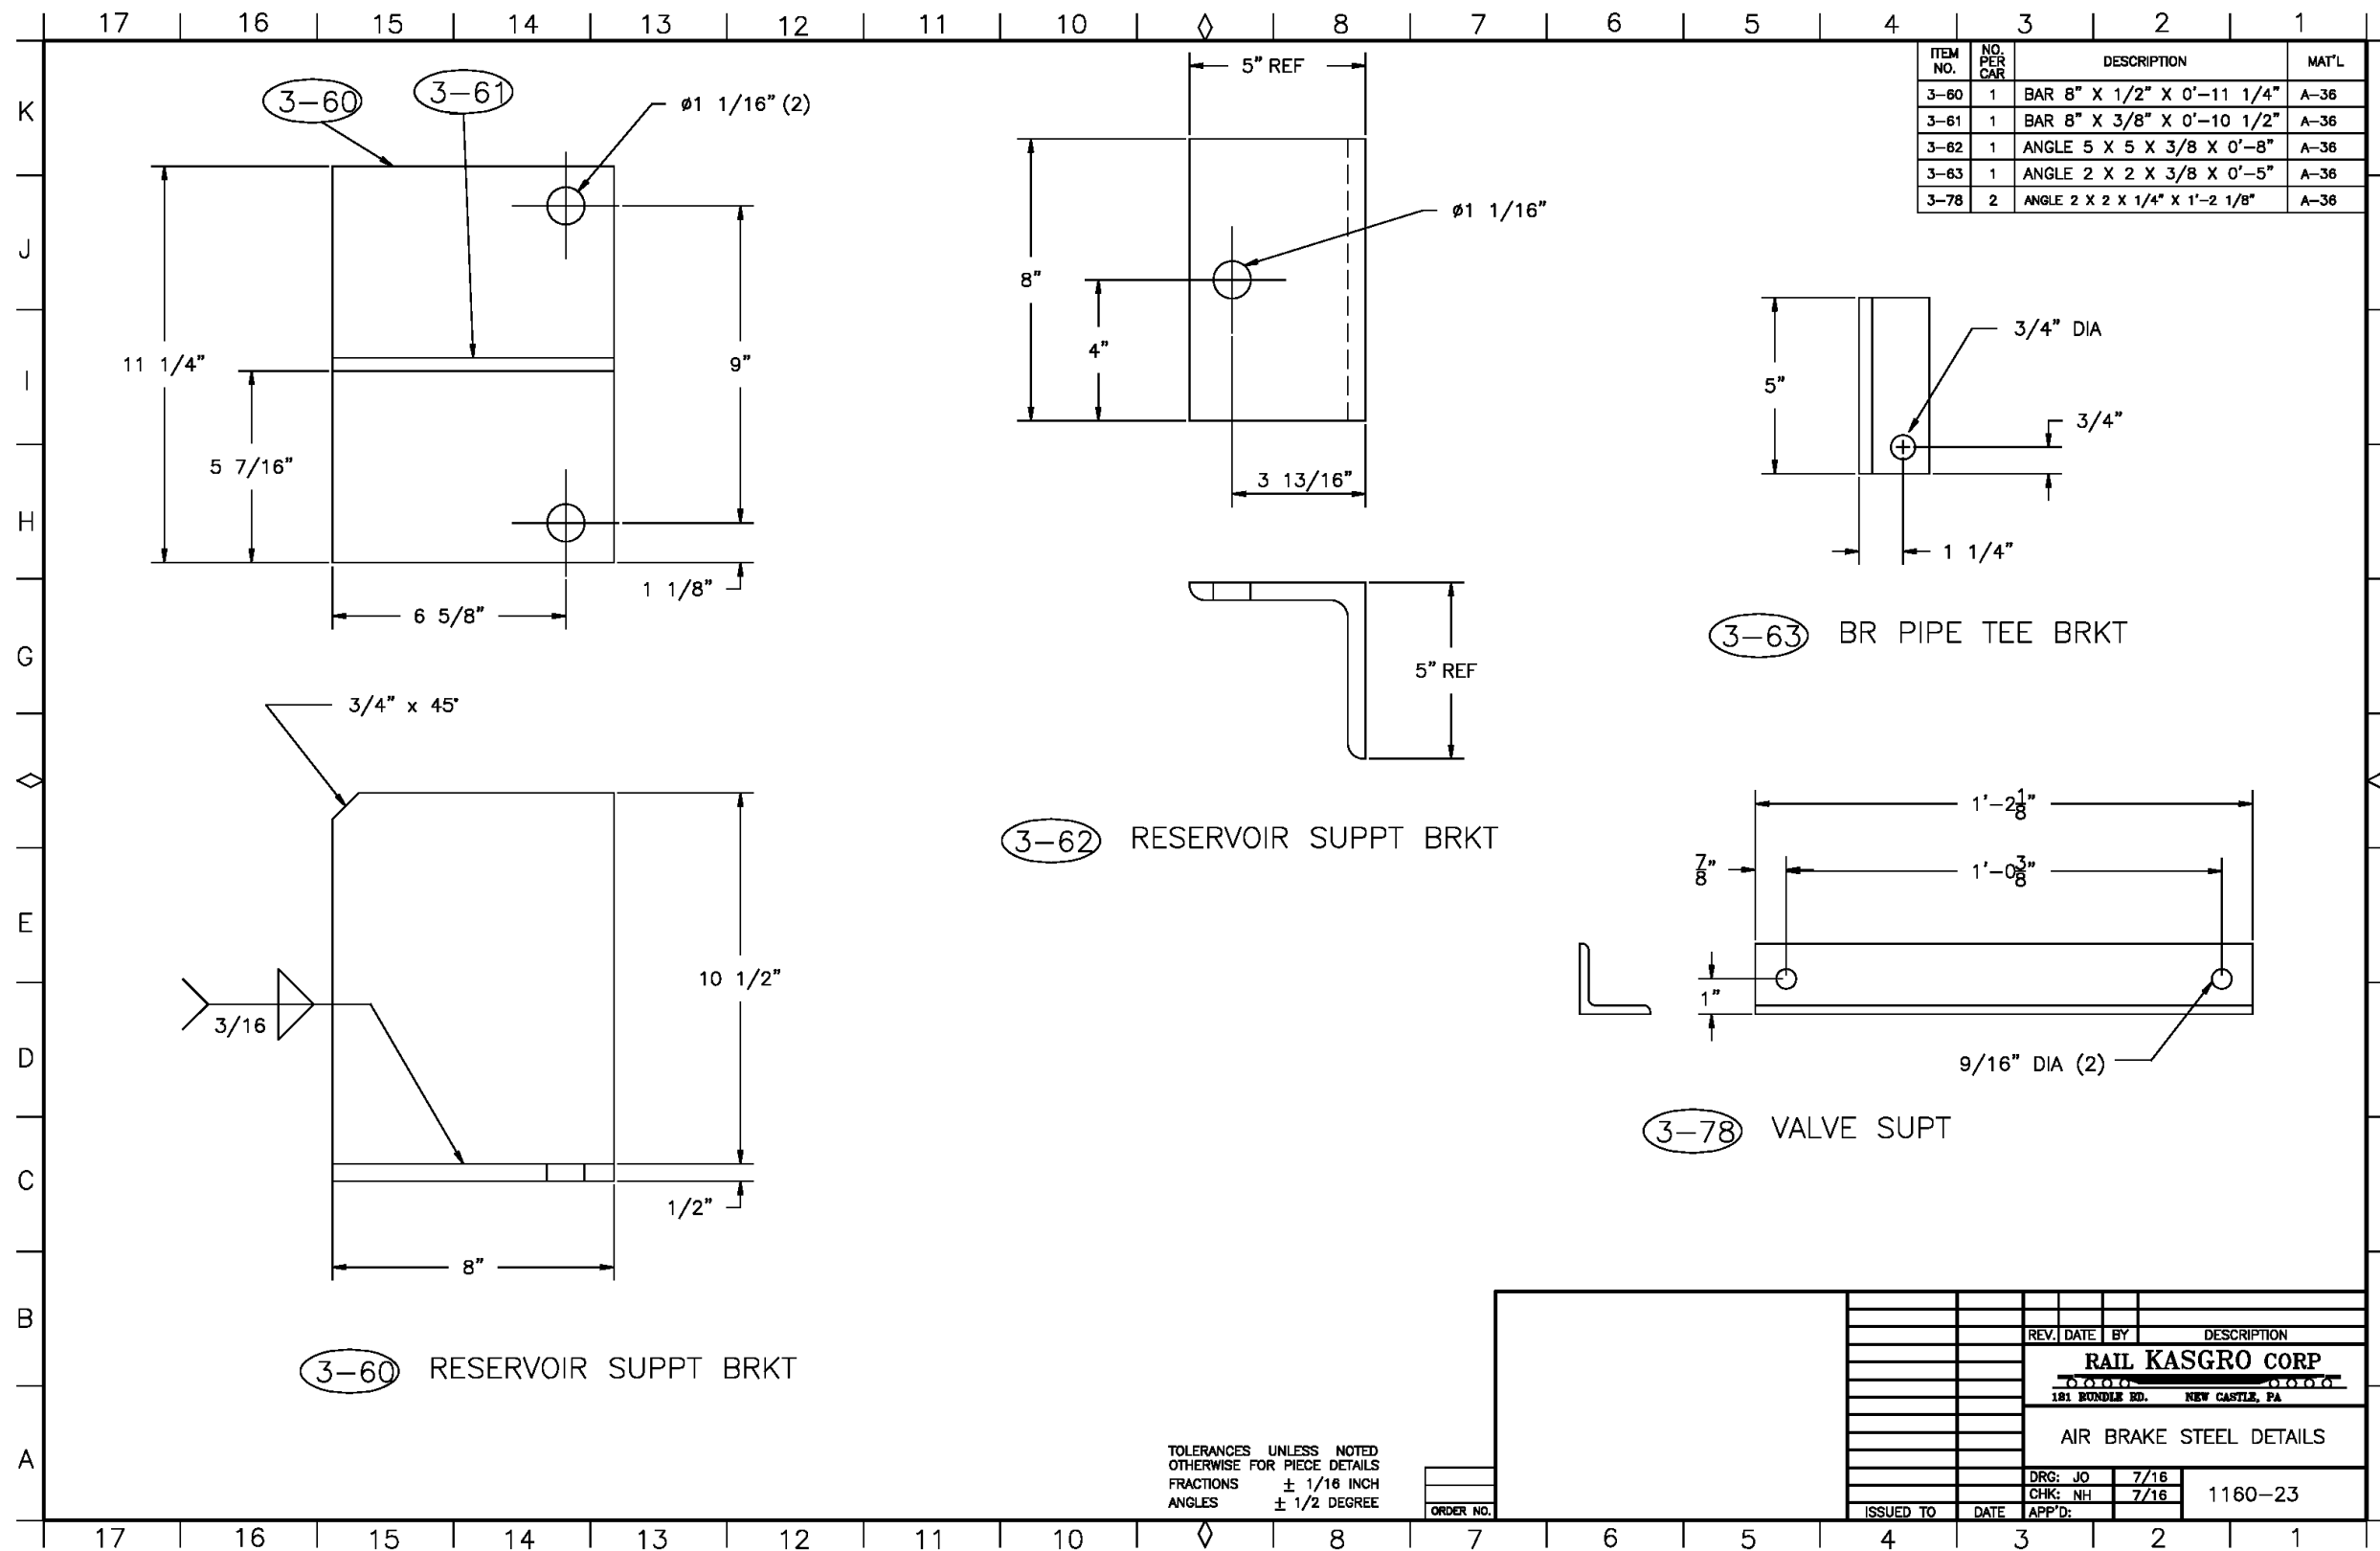


Appendix H-1.24 Air Brake Steel Details

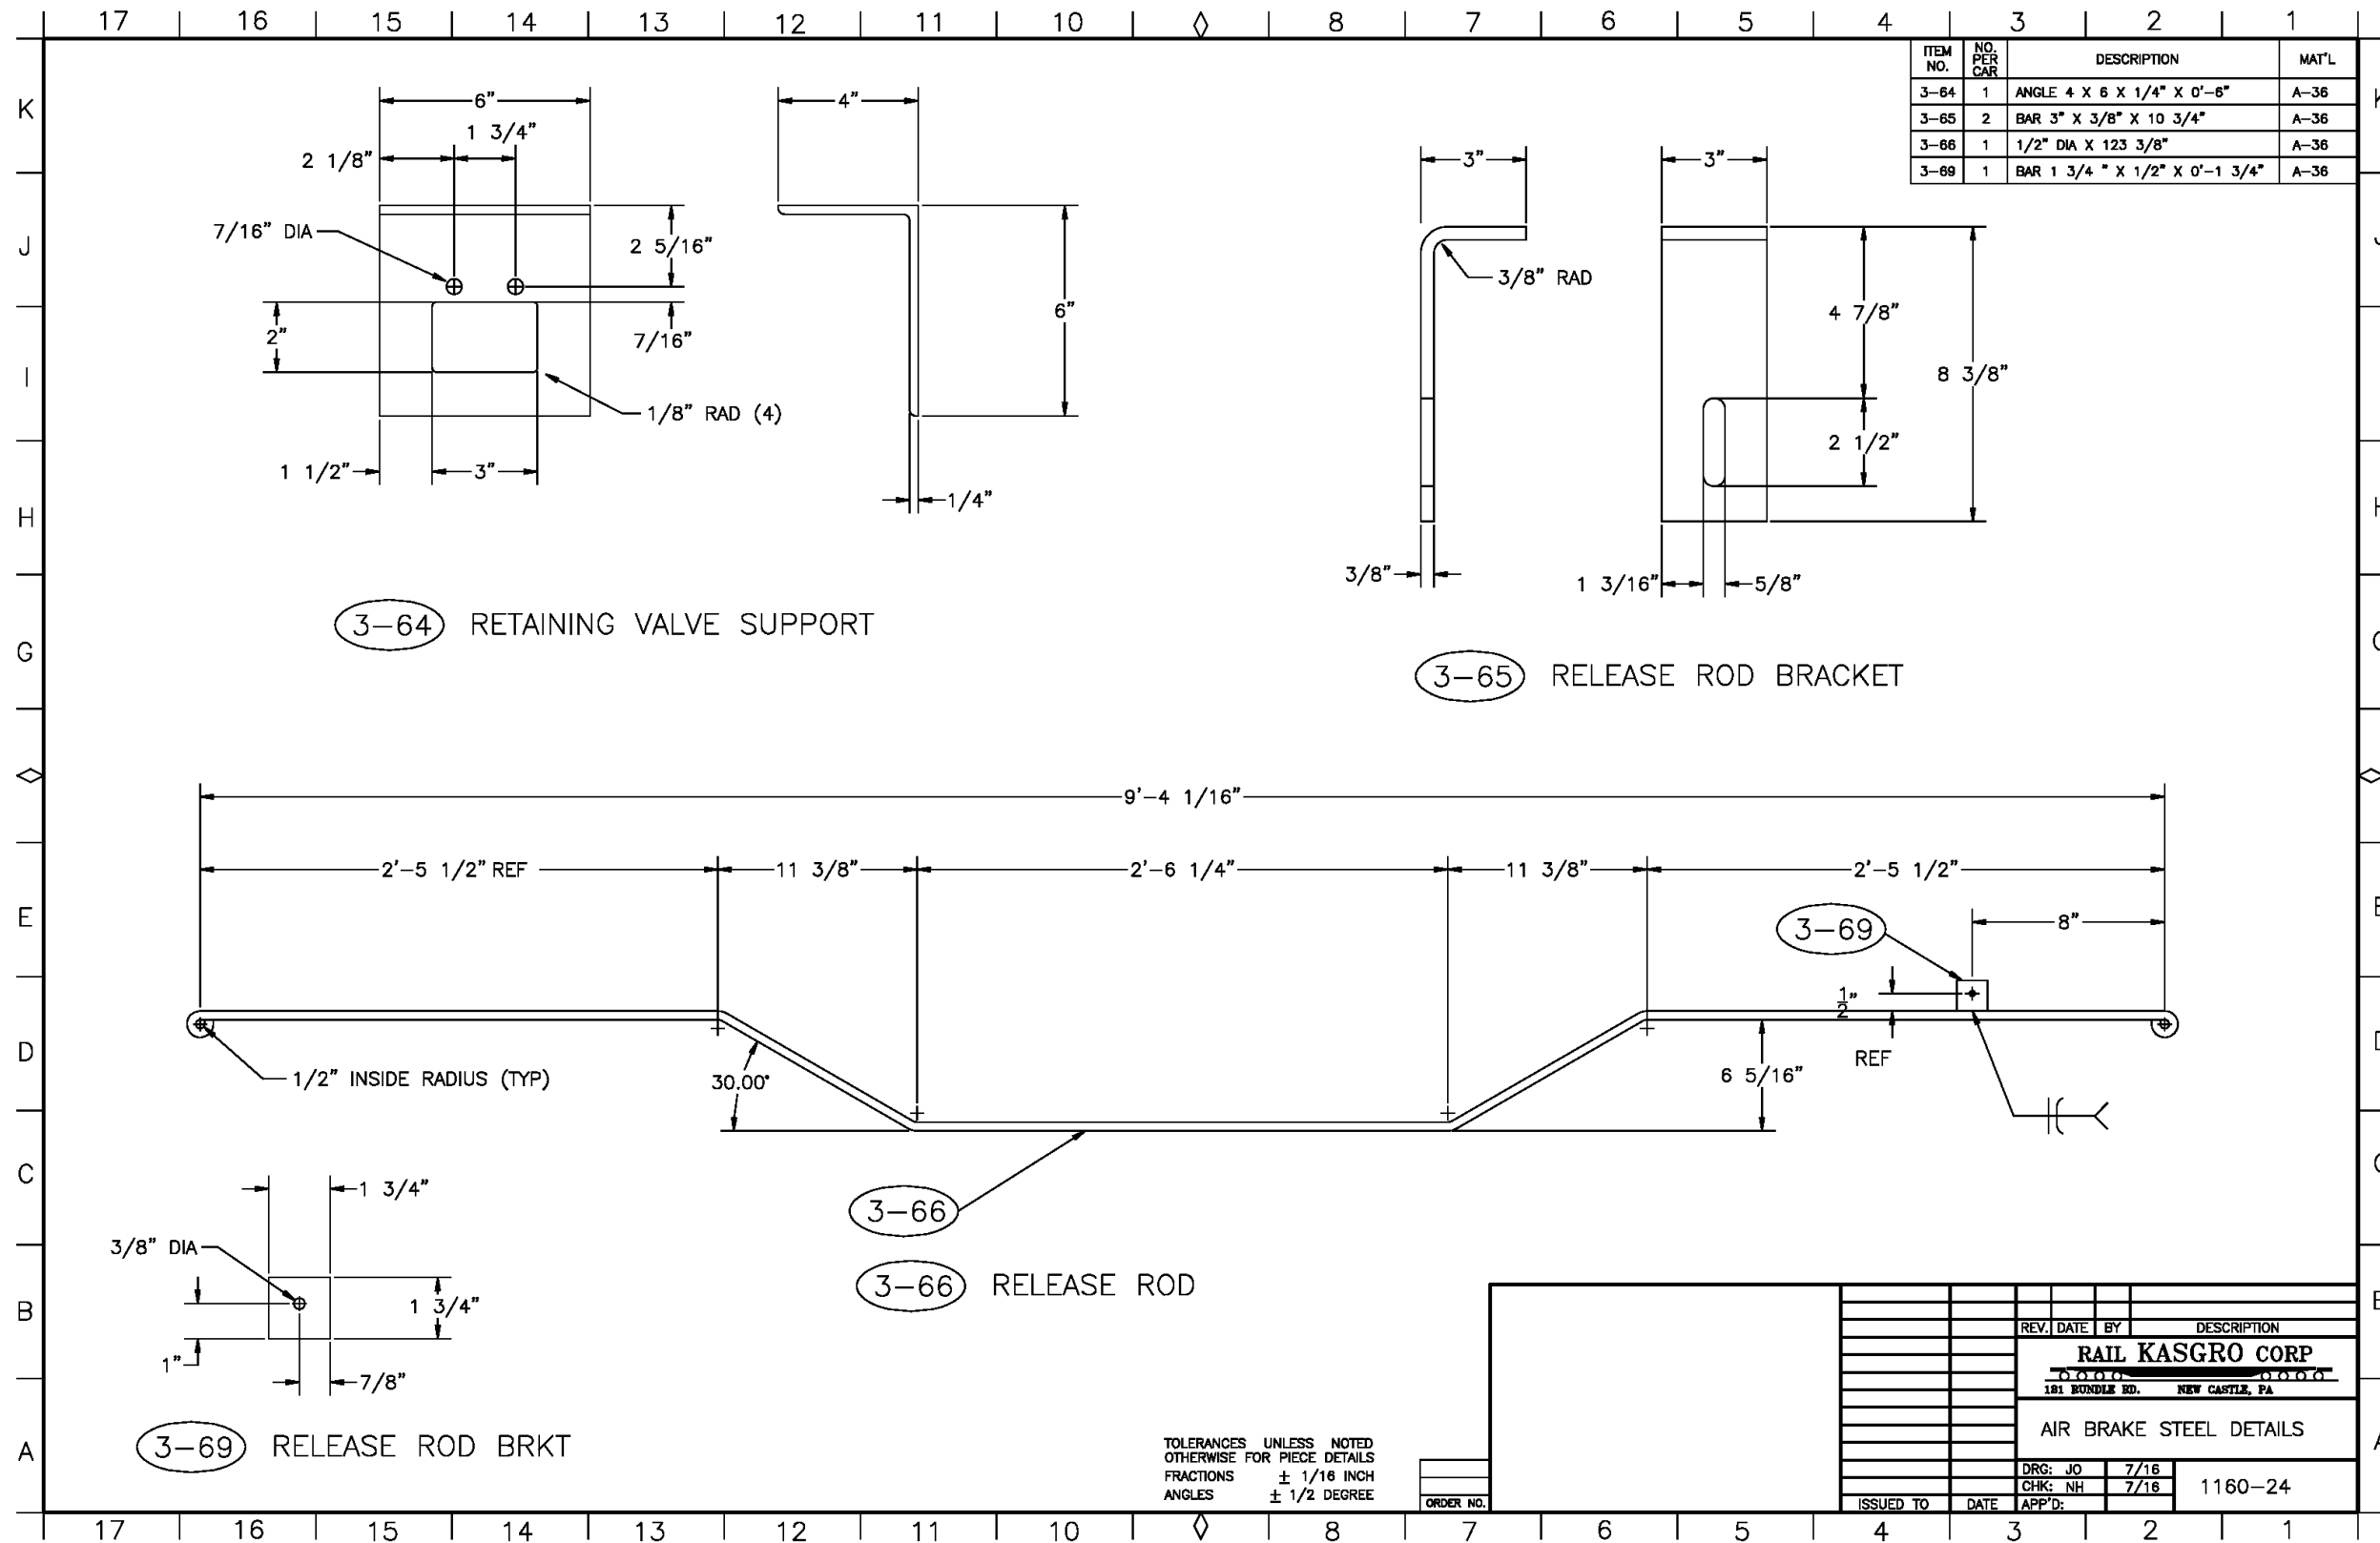

Appendix H-1.25 Pipe Details

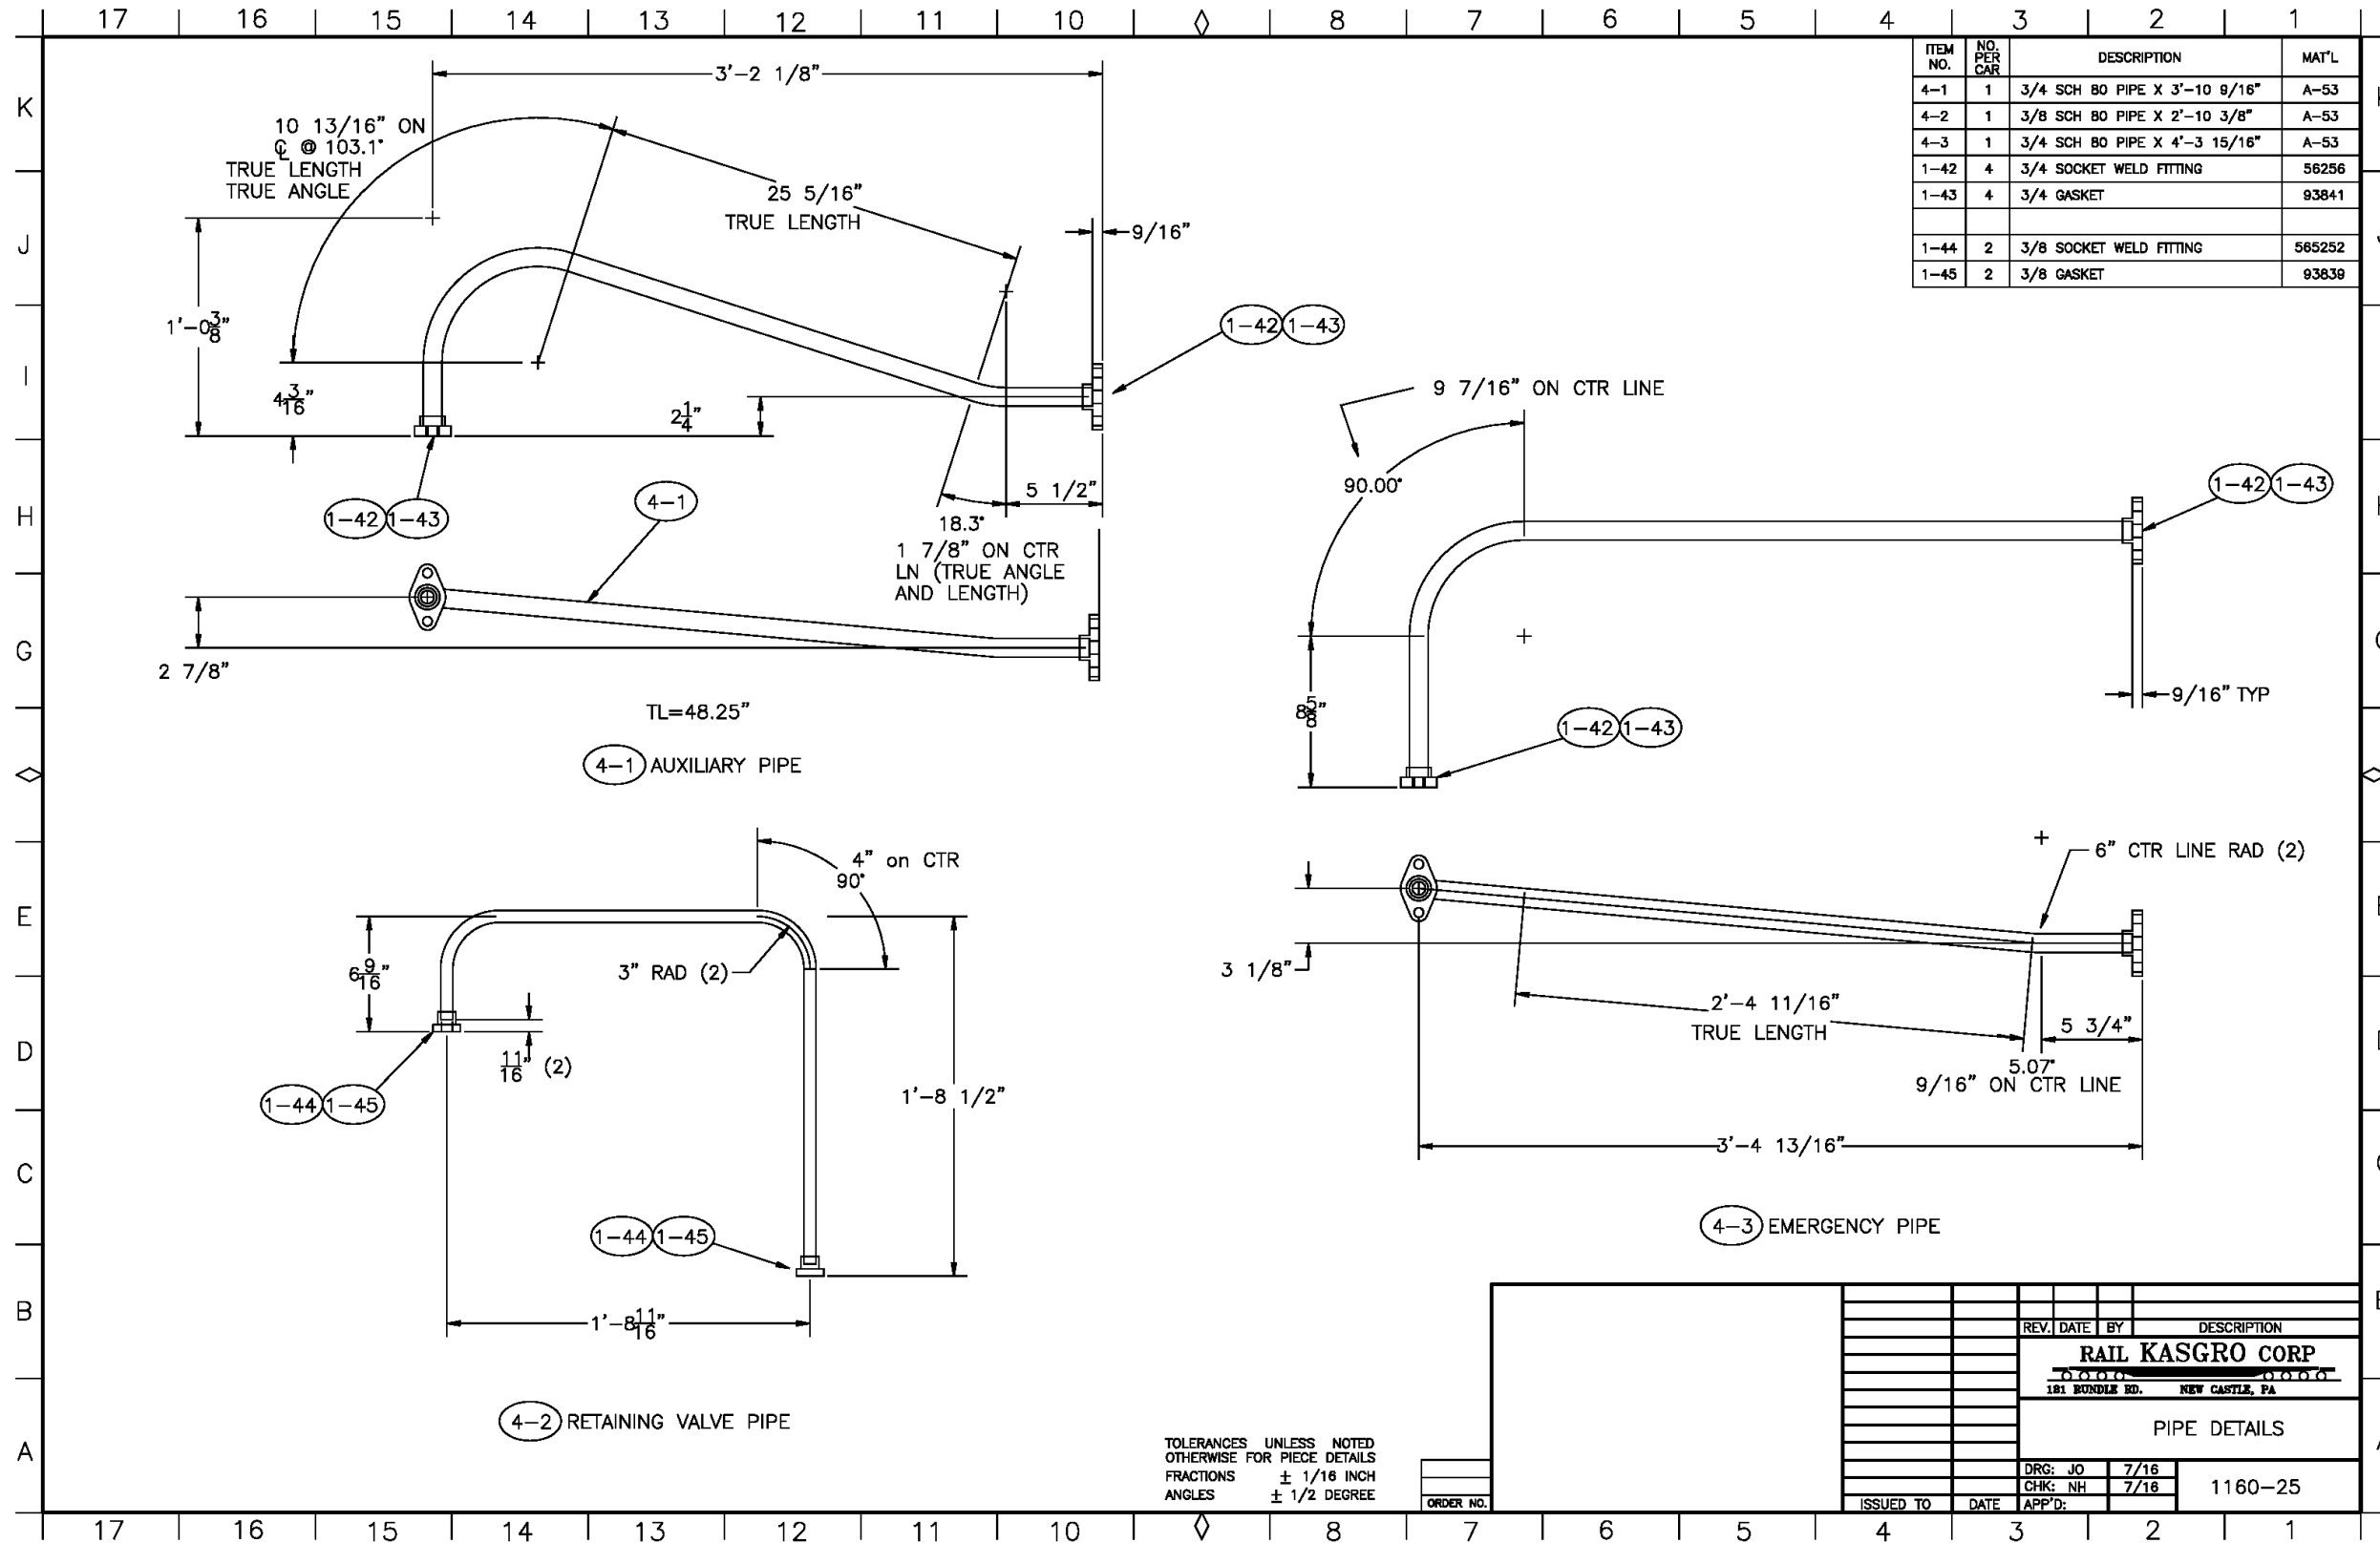


Appendix H-1.26 Pipe Details

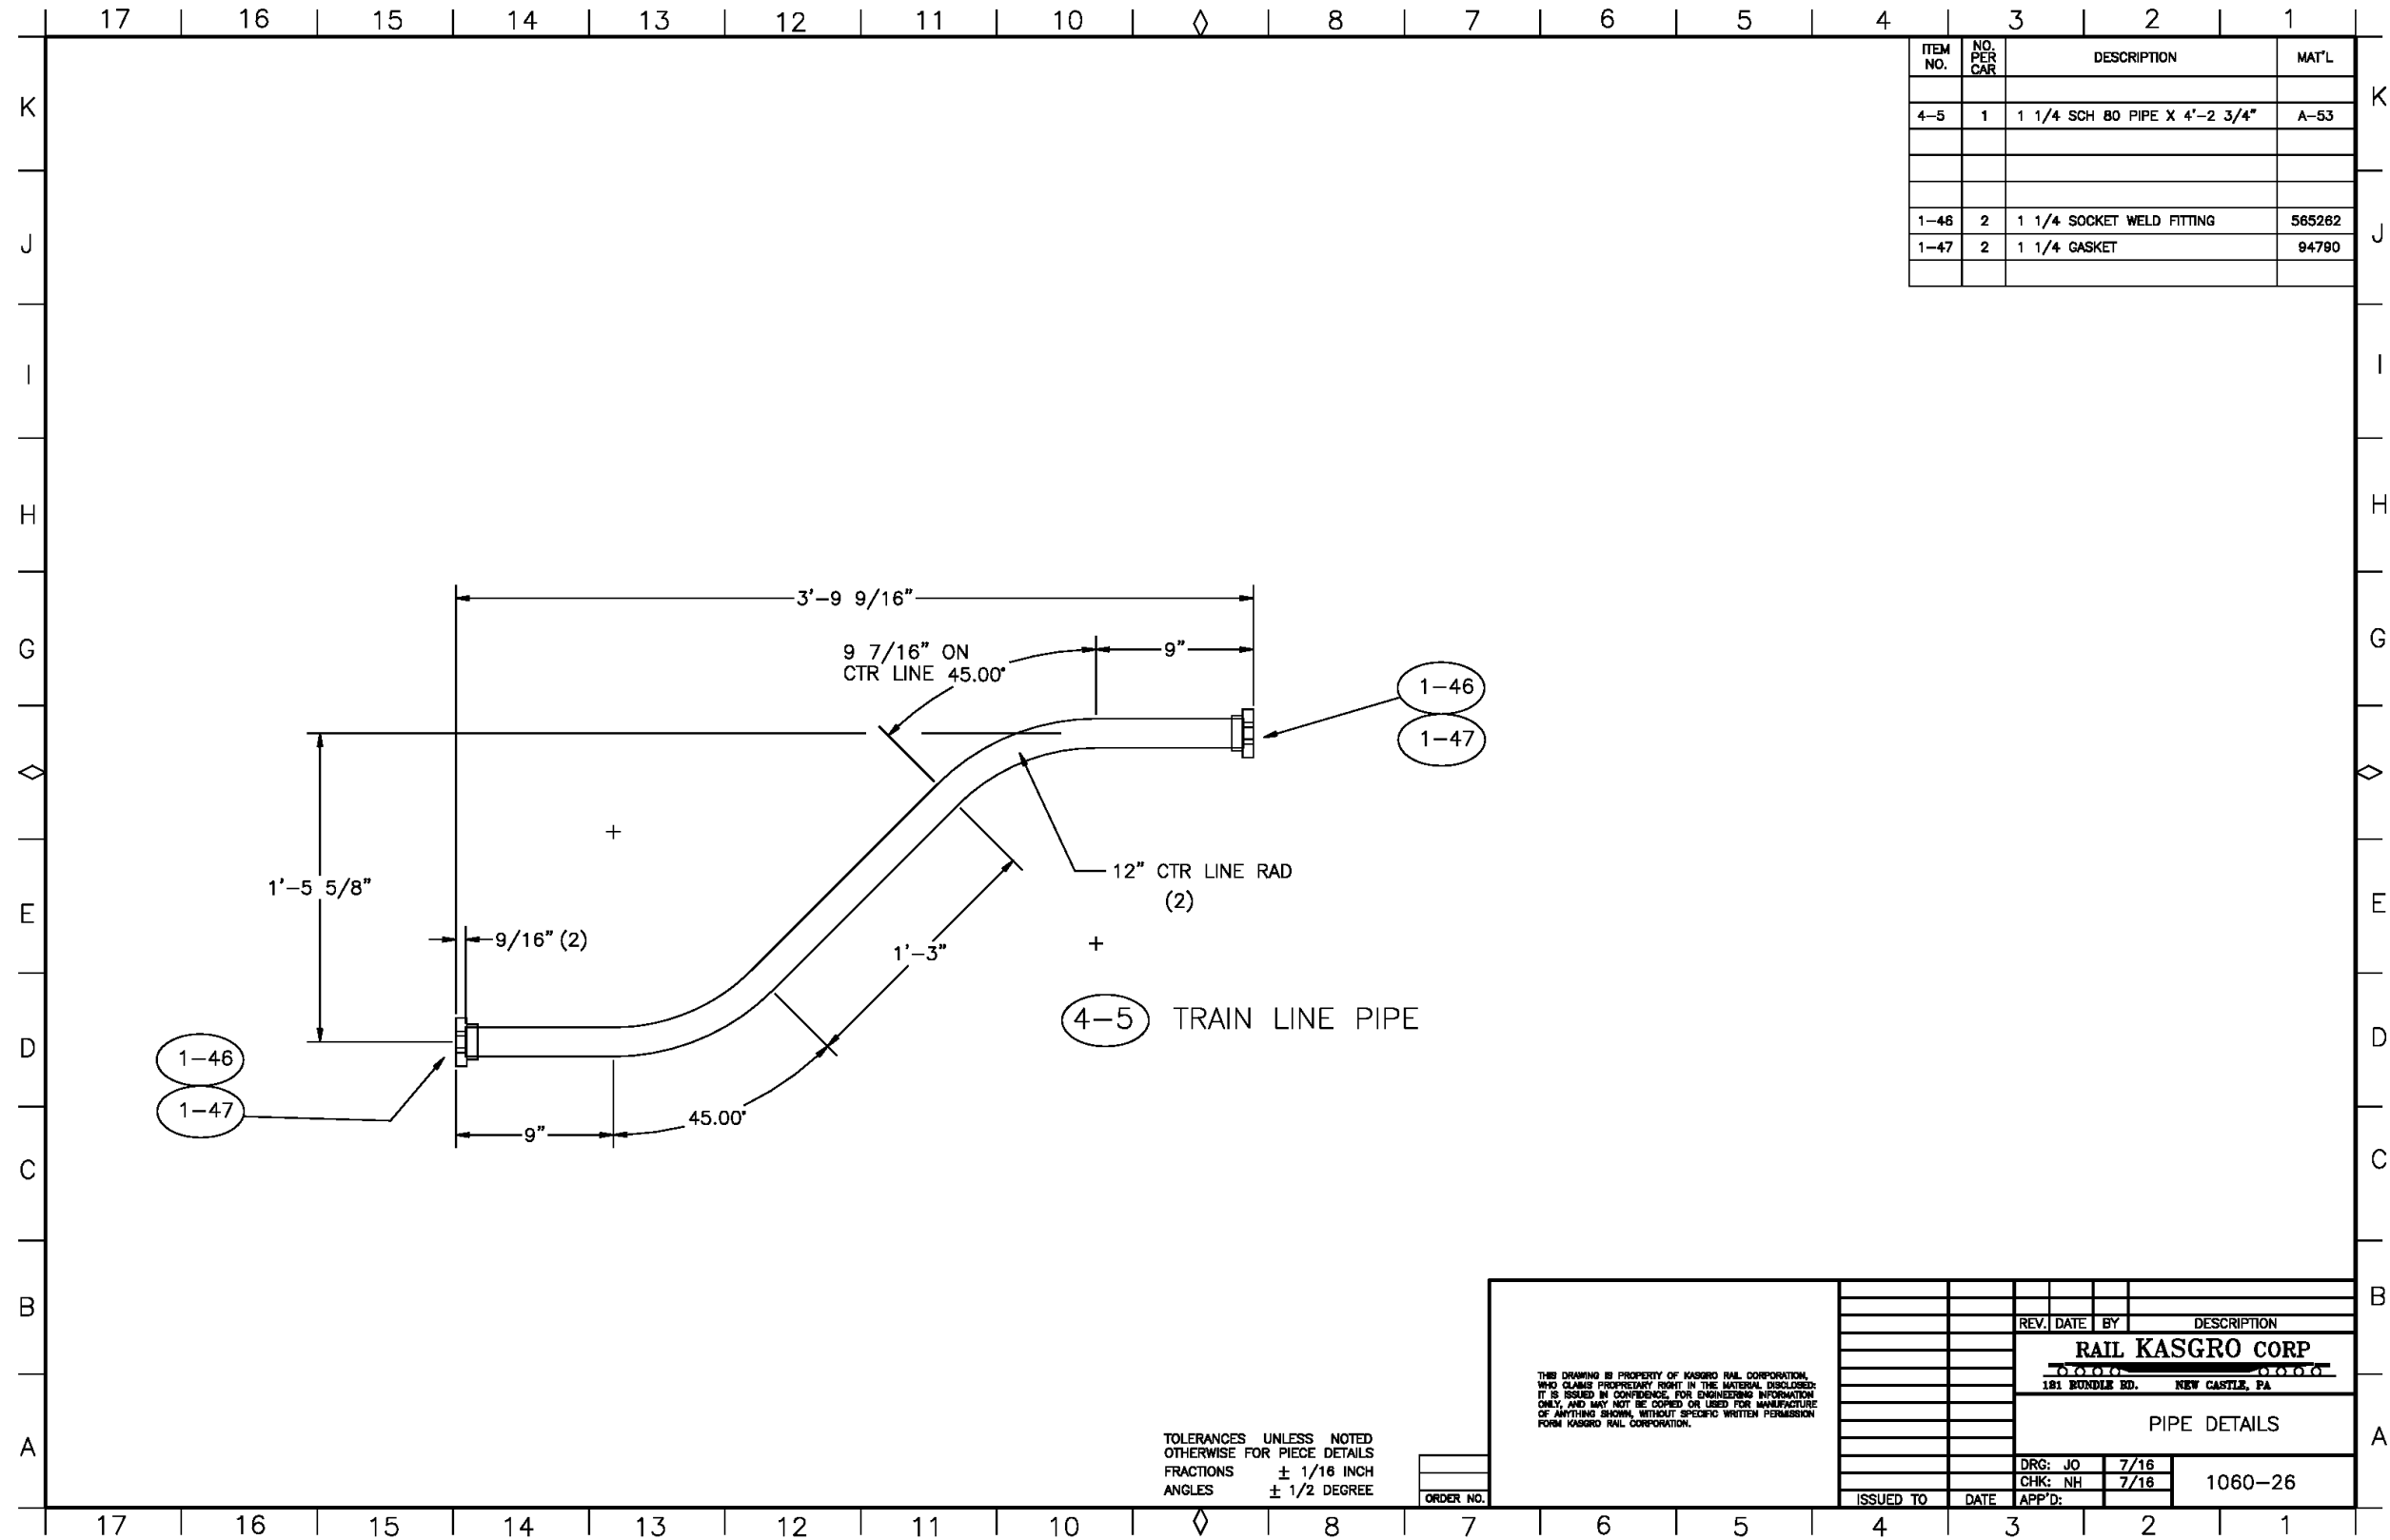


TOLERANCES UNLESS NOTED  
 OTHERWISE FOR PIECE DETAILS  
 FRACTIONS ± 1/16 INCH  
 ANGLES ± 1/2 DEGREE

REV. DATE BY		DESCRIPTION
RAIL KASGRO CORP		
181 BUNDLER RD.		NEW CASTLE, PA
PIPE DETAILS		
DRG: JO	7/16	
CHK: NH	7/16	1060-26
ISSUED TO	DATE	APP'D:

Appendix H-1.27 Pipe Details

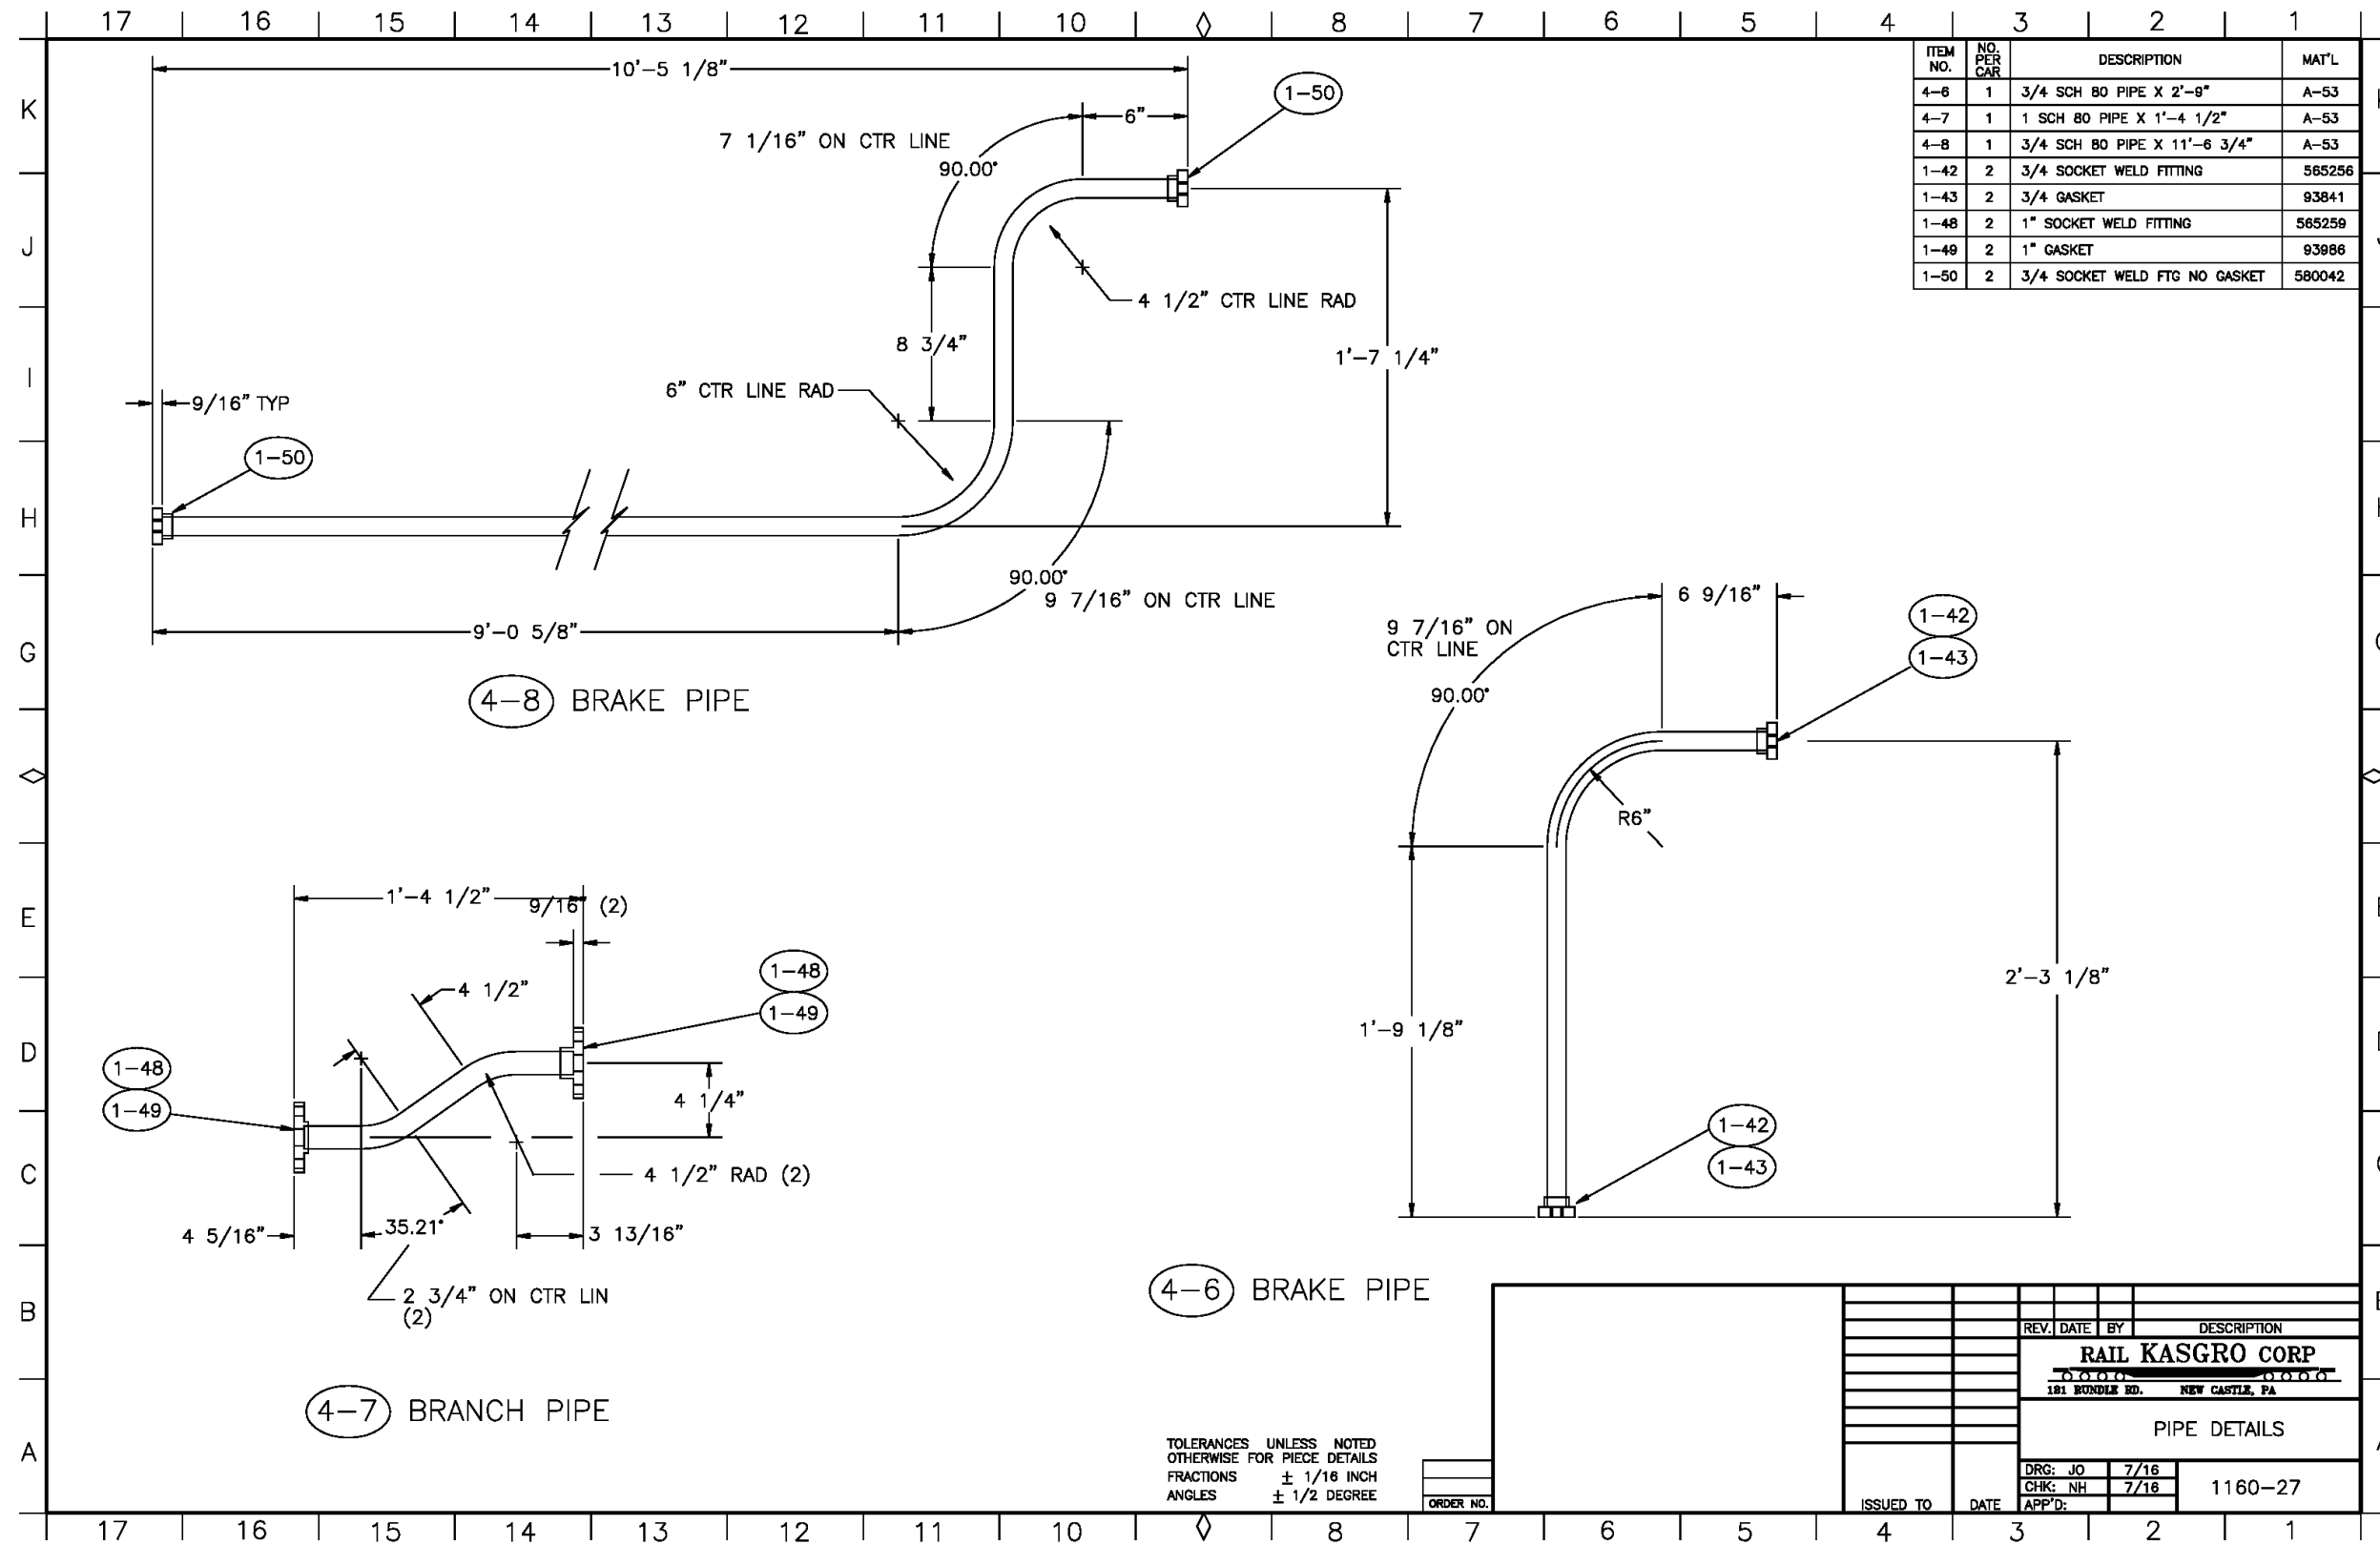


Appendix H-1.28 Brake Pipe Details

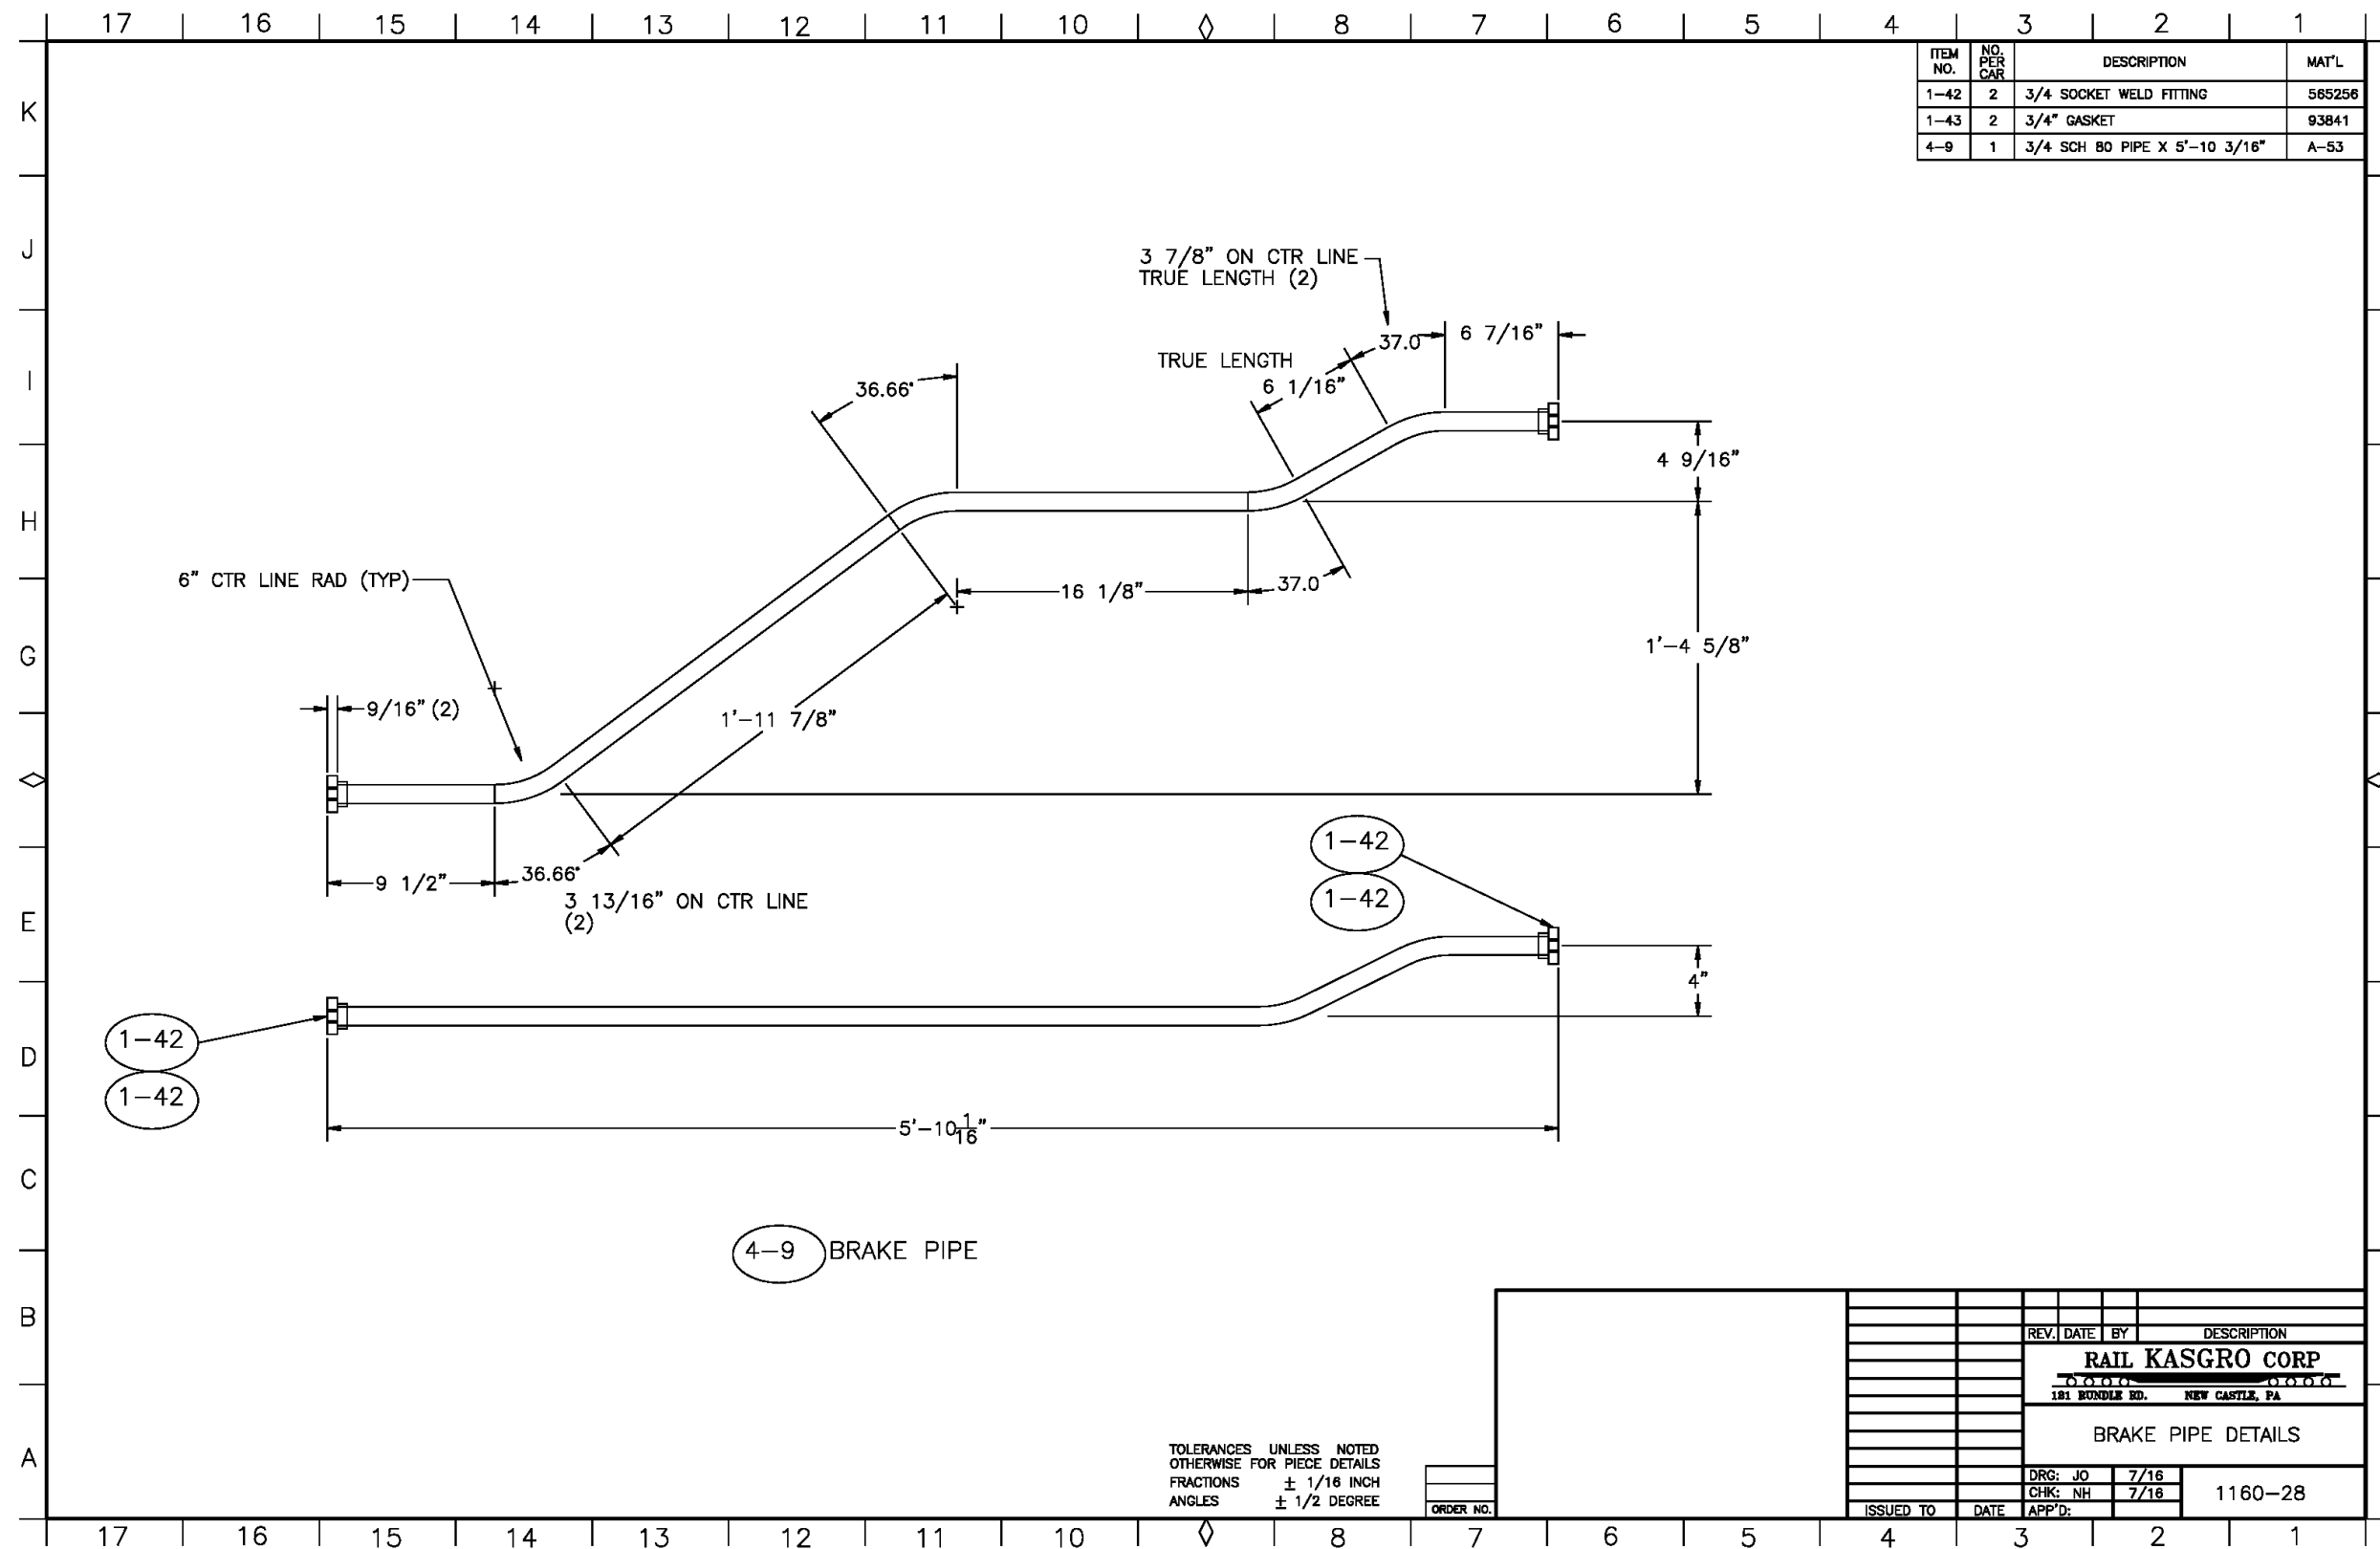


TOLERANCES UNLESS NOTED OTHERWISE FOR PIECE DETAILS  
FRACTIONS ± 1/16 INCH  
ANGLES ± 1/2 DEGREE

REV.	DATE	BY	DESCRIPTION
<b>RAIL KASGRO CORP</b> 181 BUNDLE RD. NEW CASTLE, PA			
BRAKE PIPE DETAILS			
DRG:	JO	7/16	
CHK:	NH	7/16	1160-28
ISSUED TO	DATE	APP'D:	


Appendix H-1.29 Air Brake Details

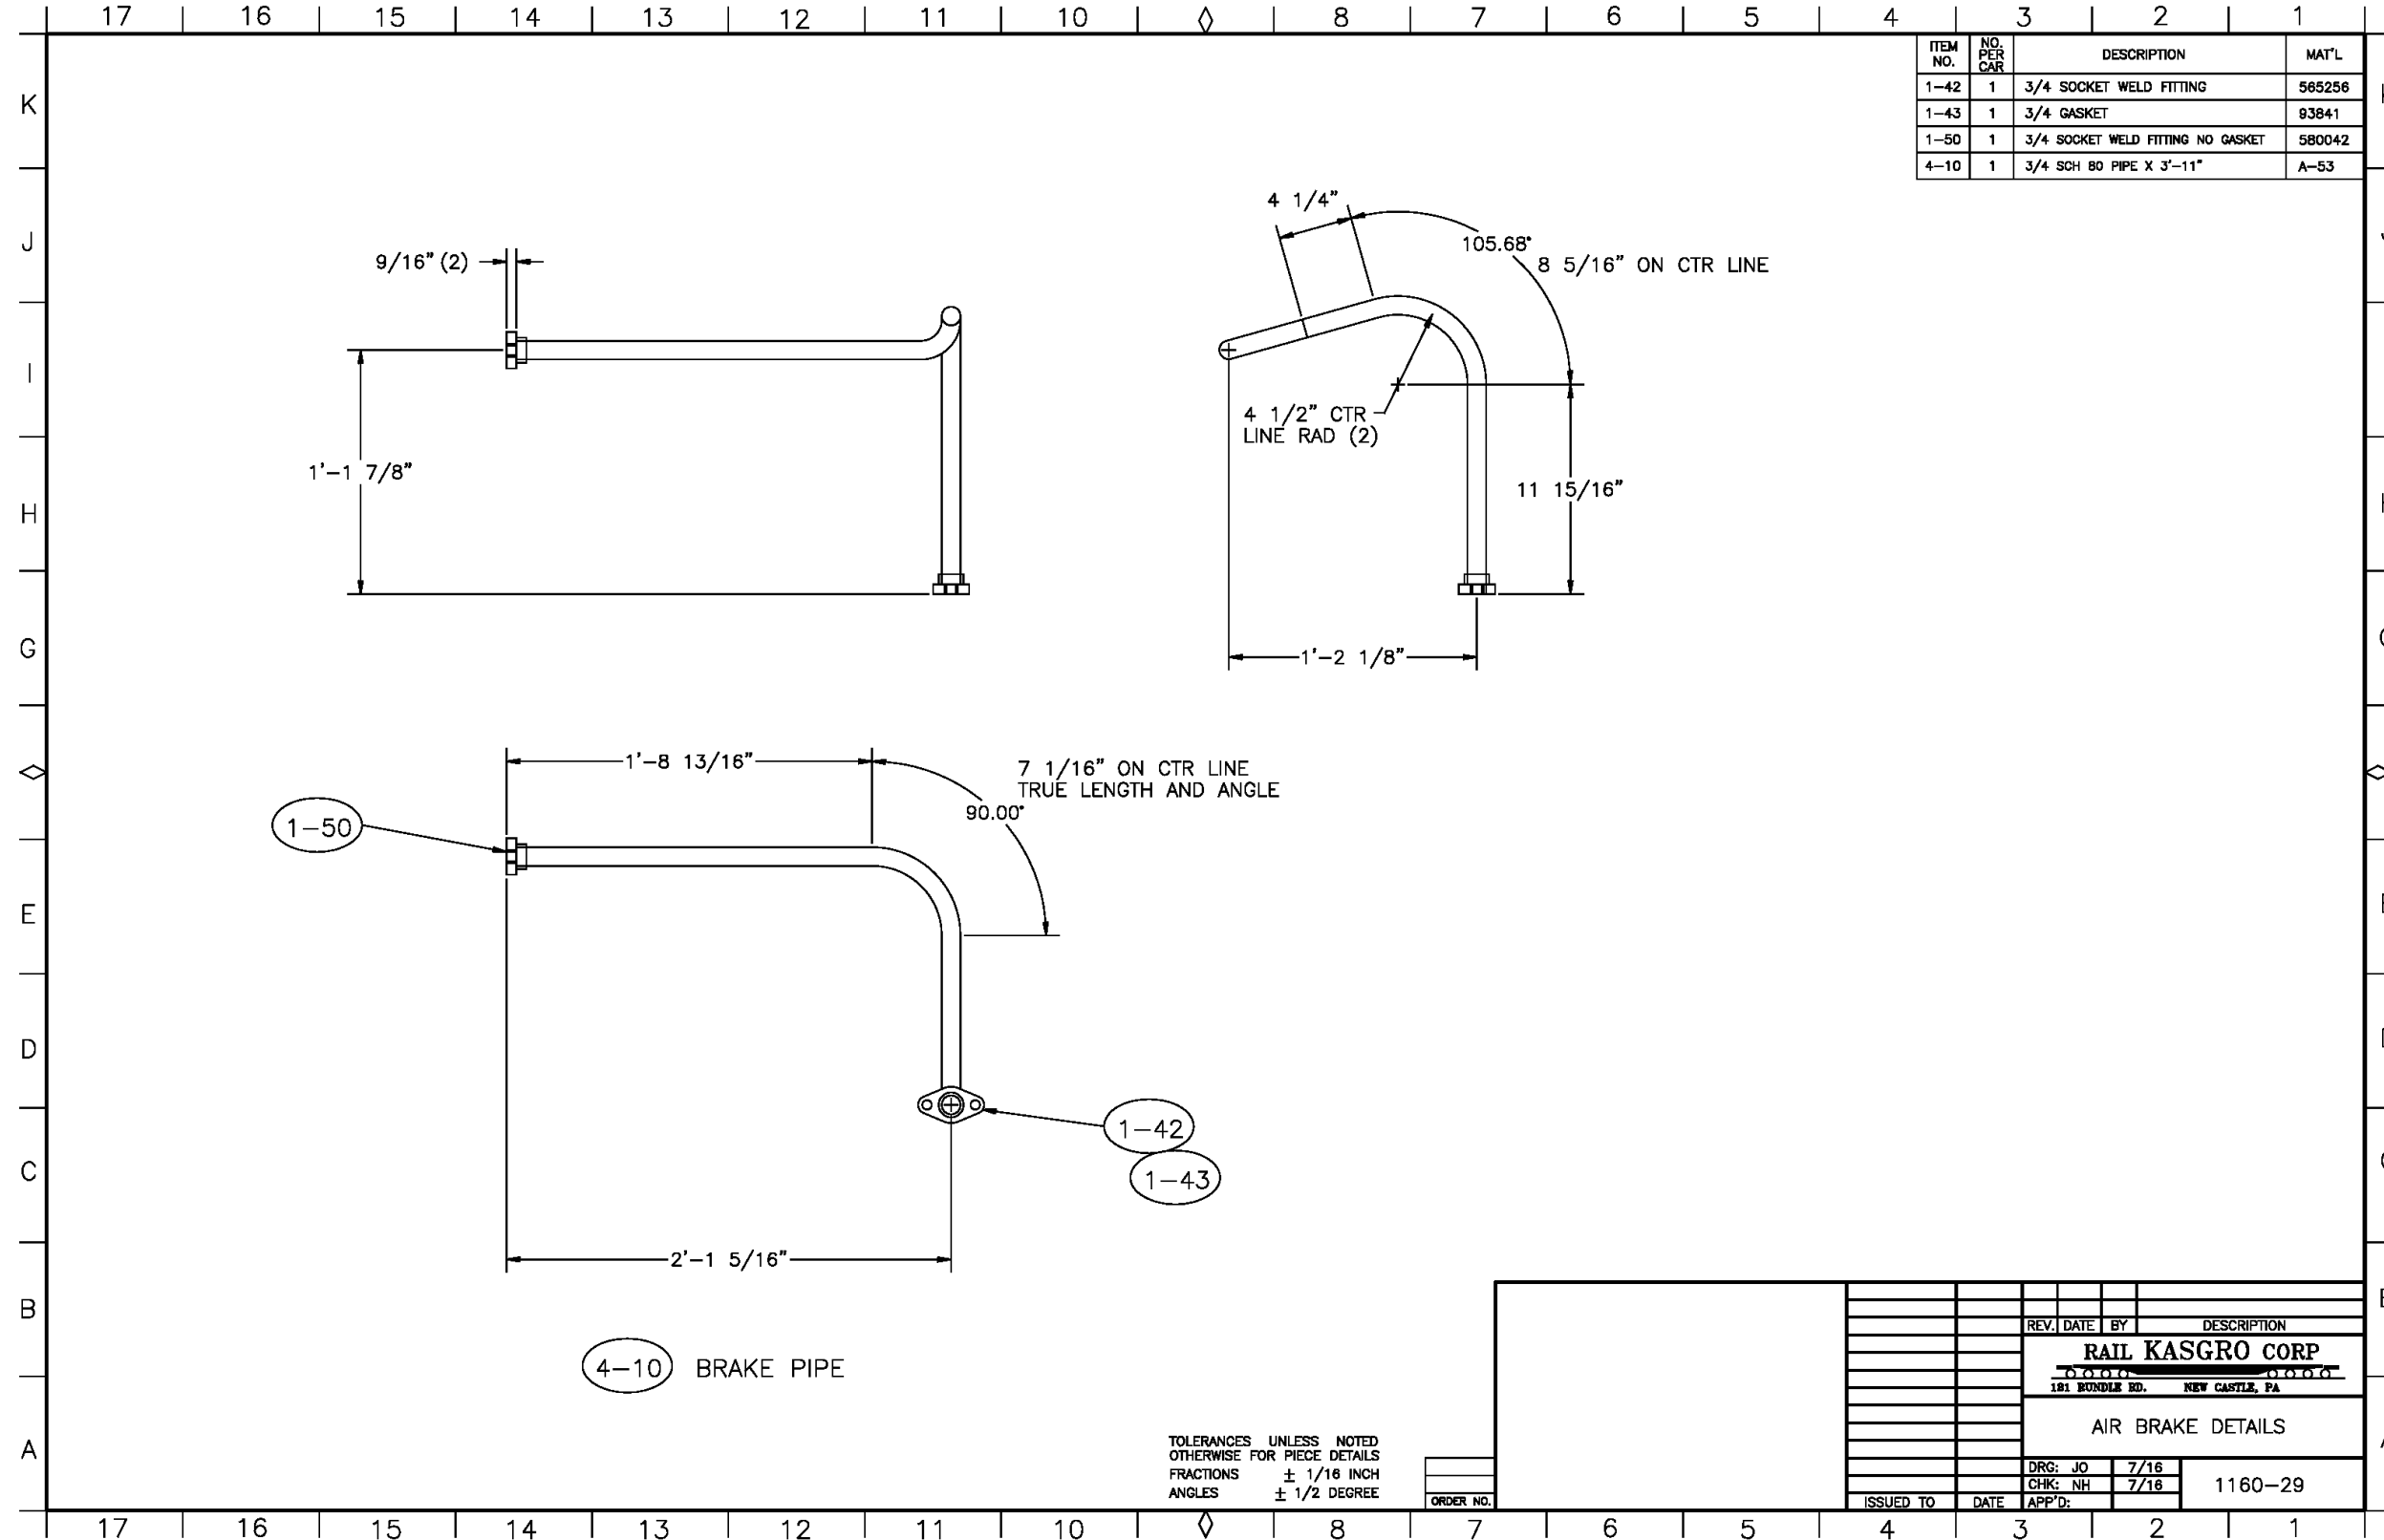


Appendix H-1.30 Air Brake Details

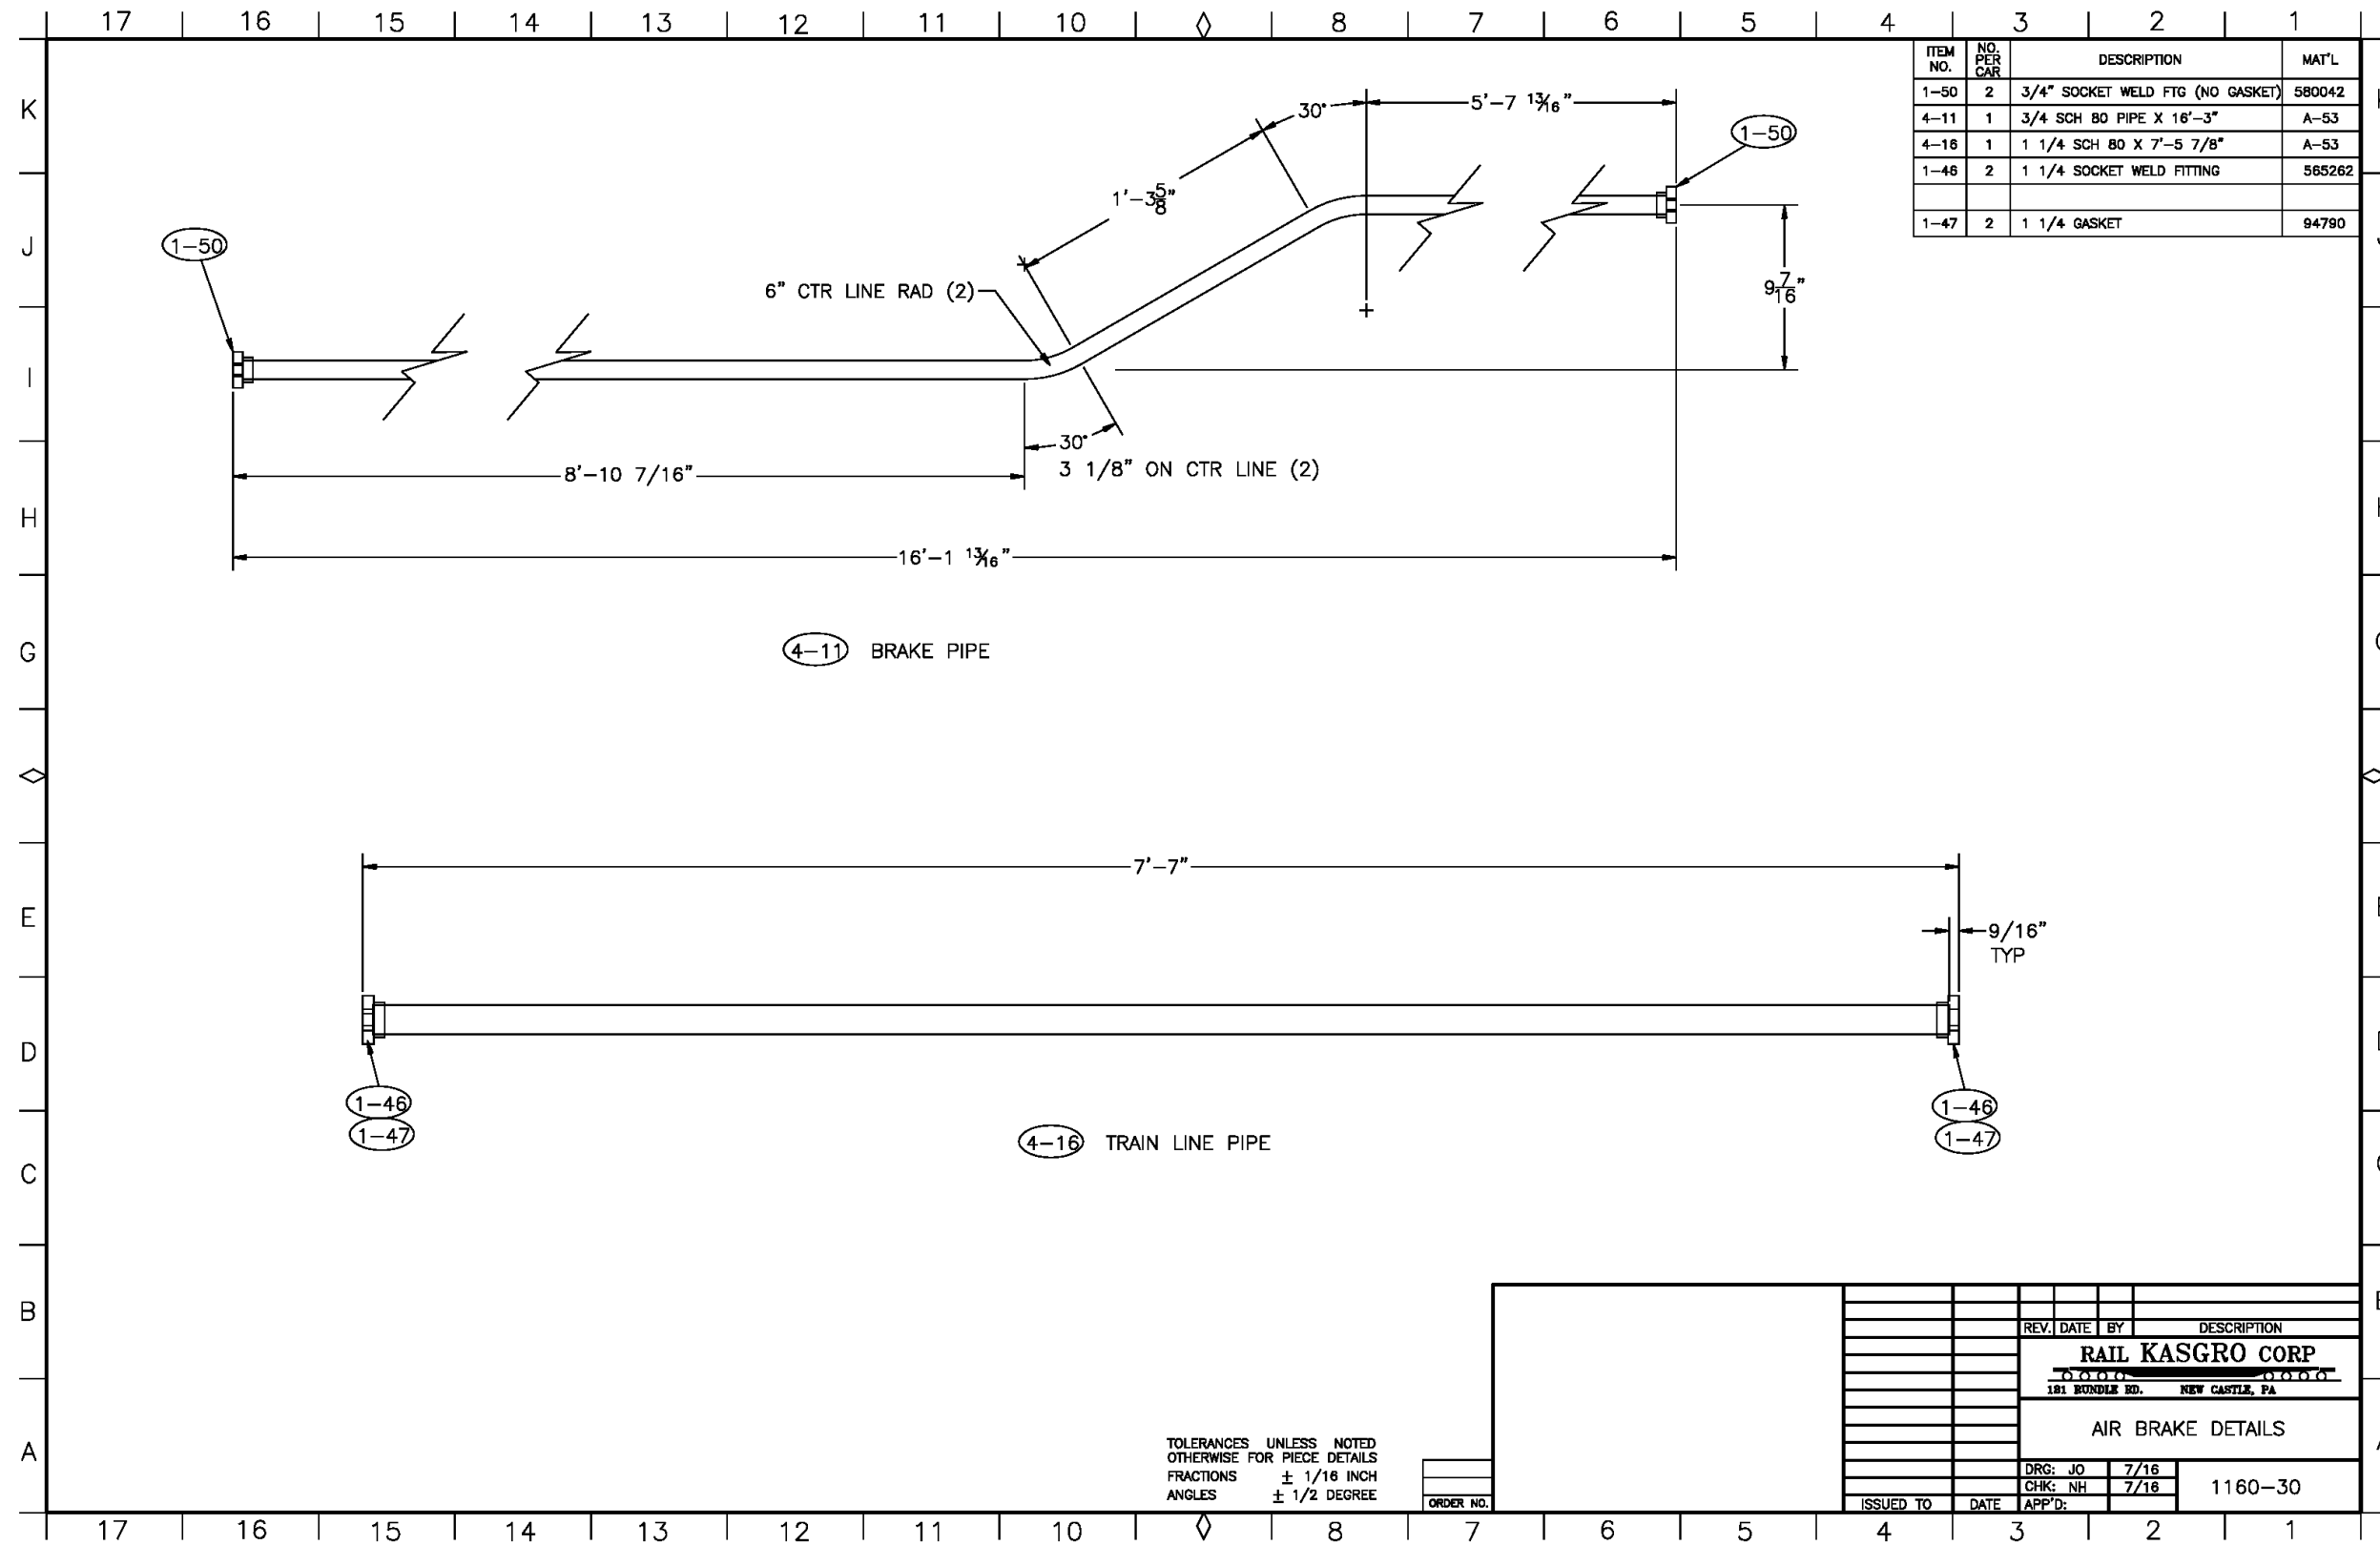


Appendix H-1.31 Air Brake Details

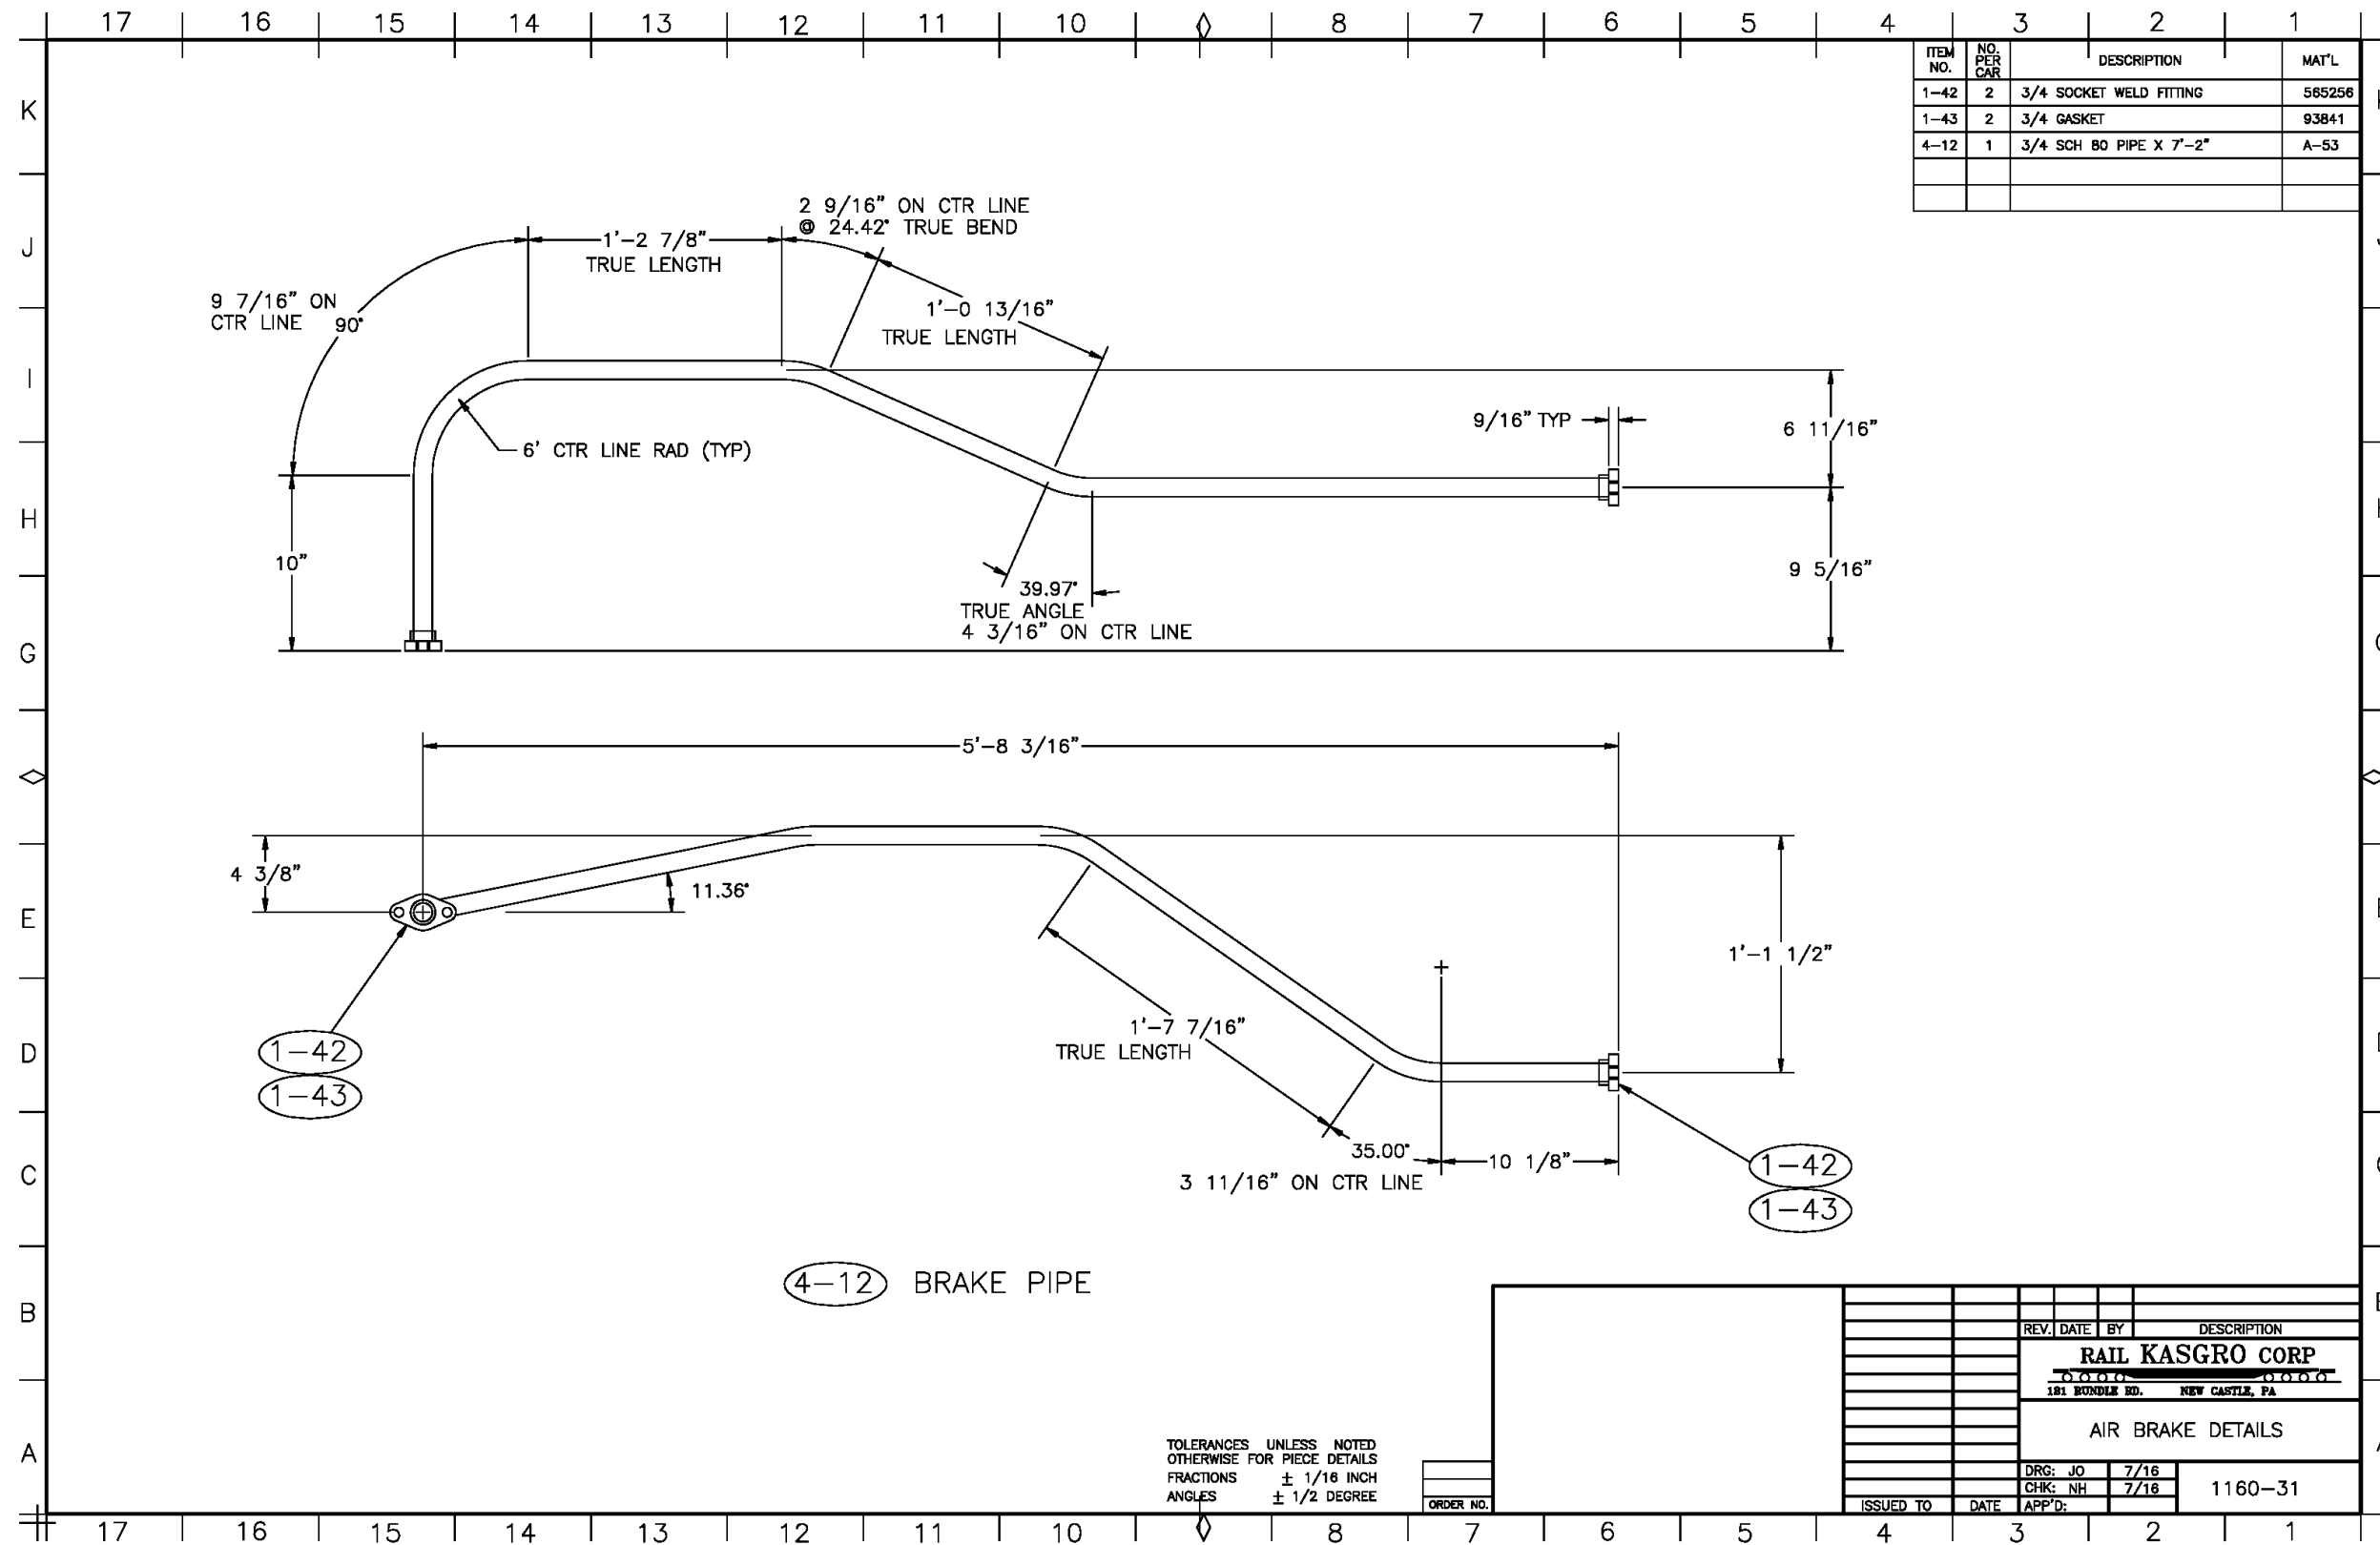


Appendix H-1.32 Air Brake Steel Details

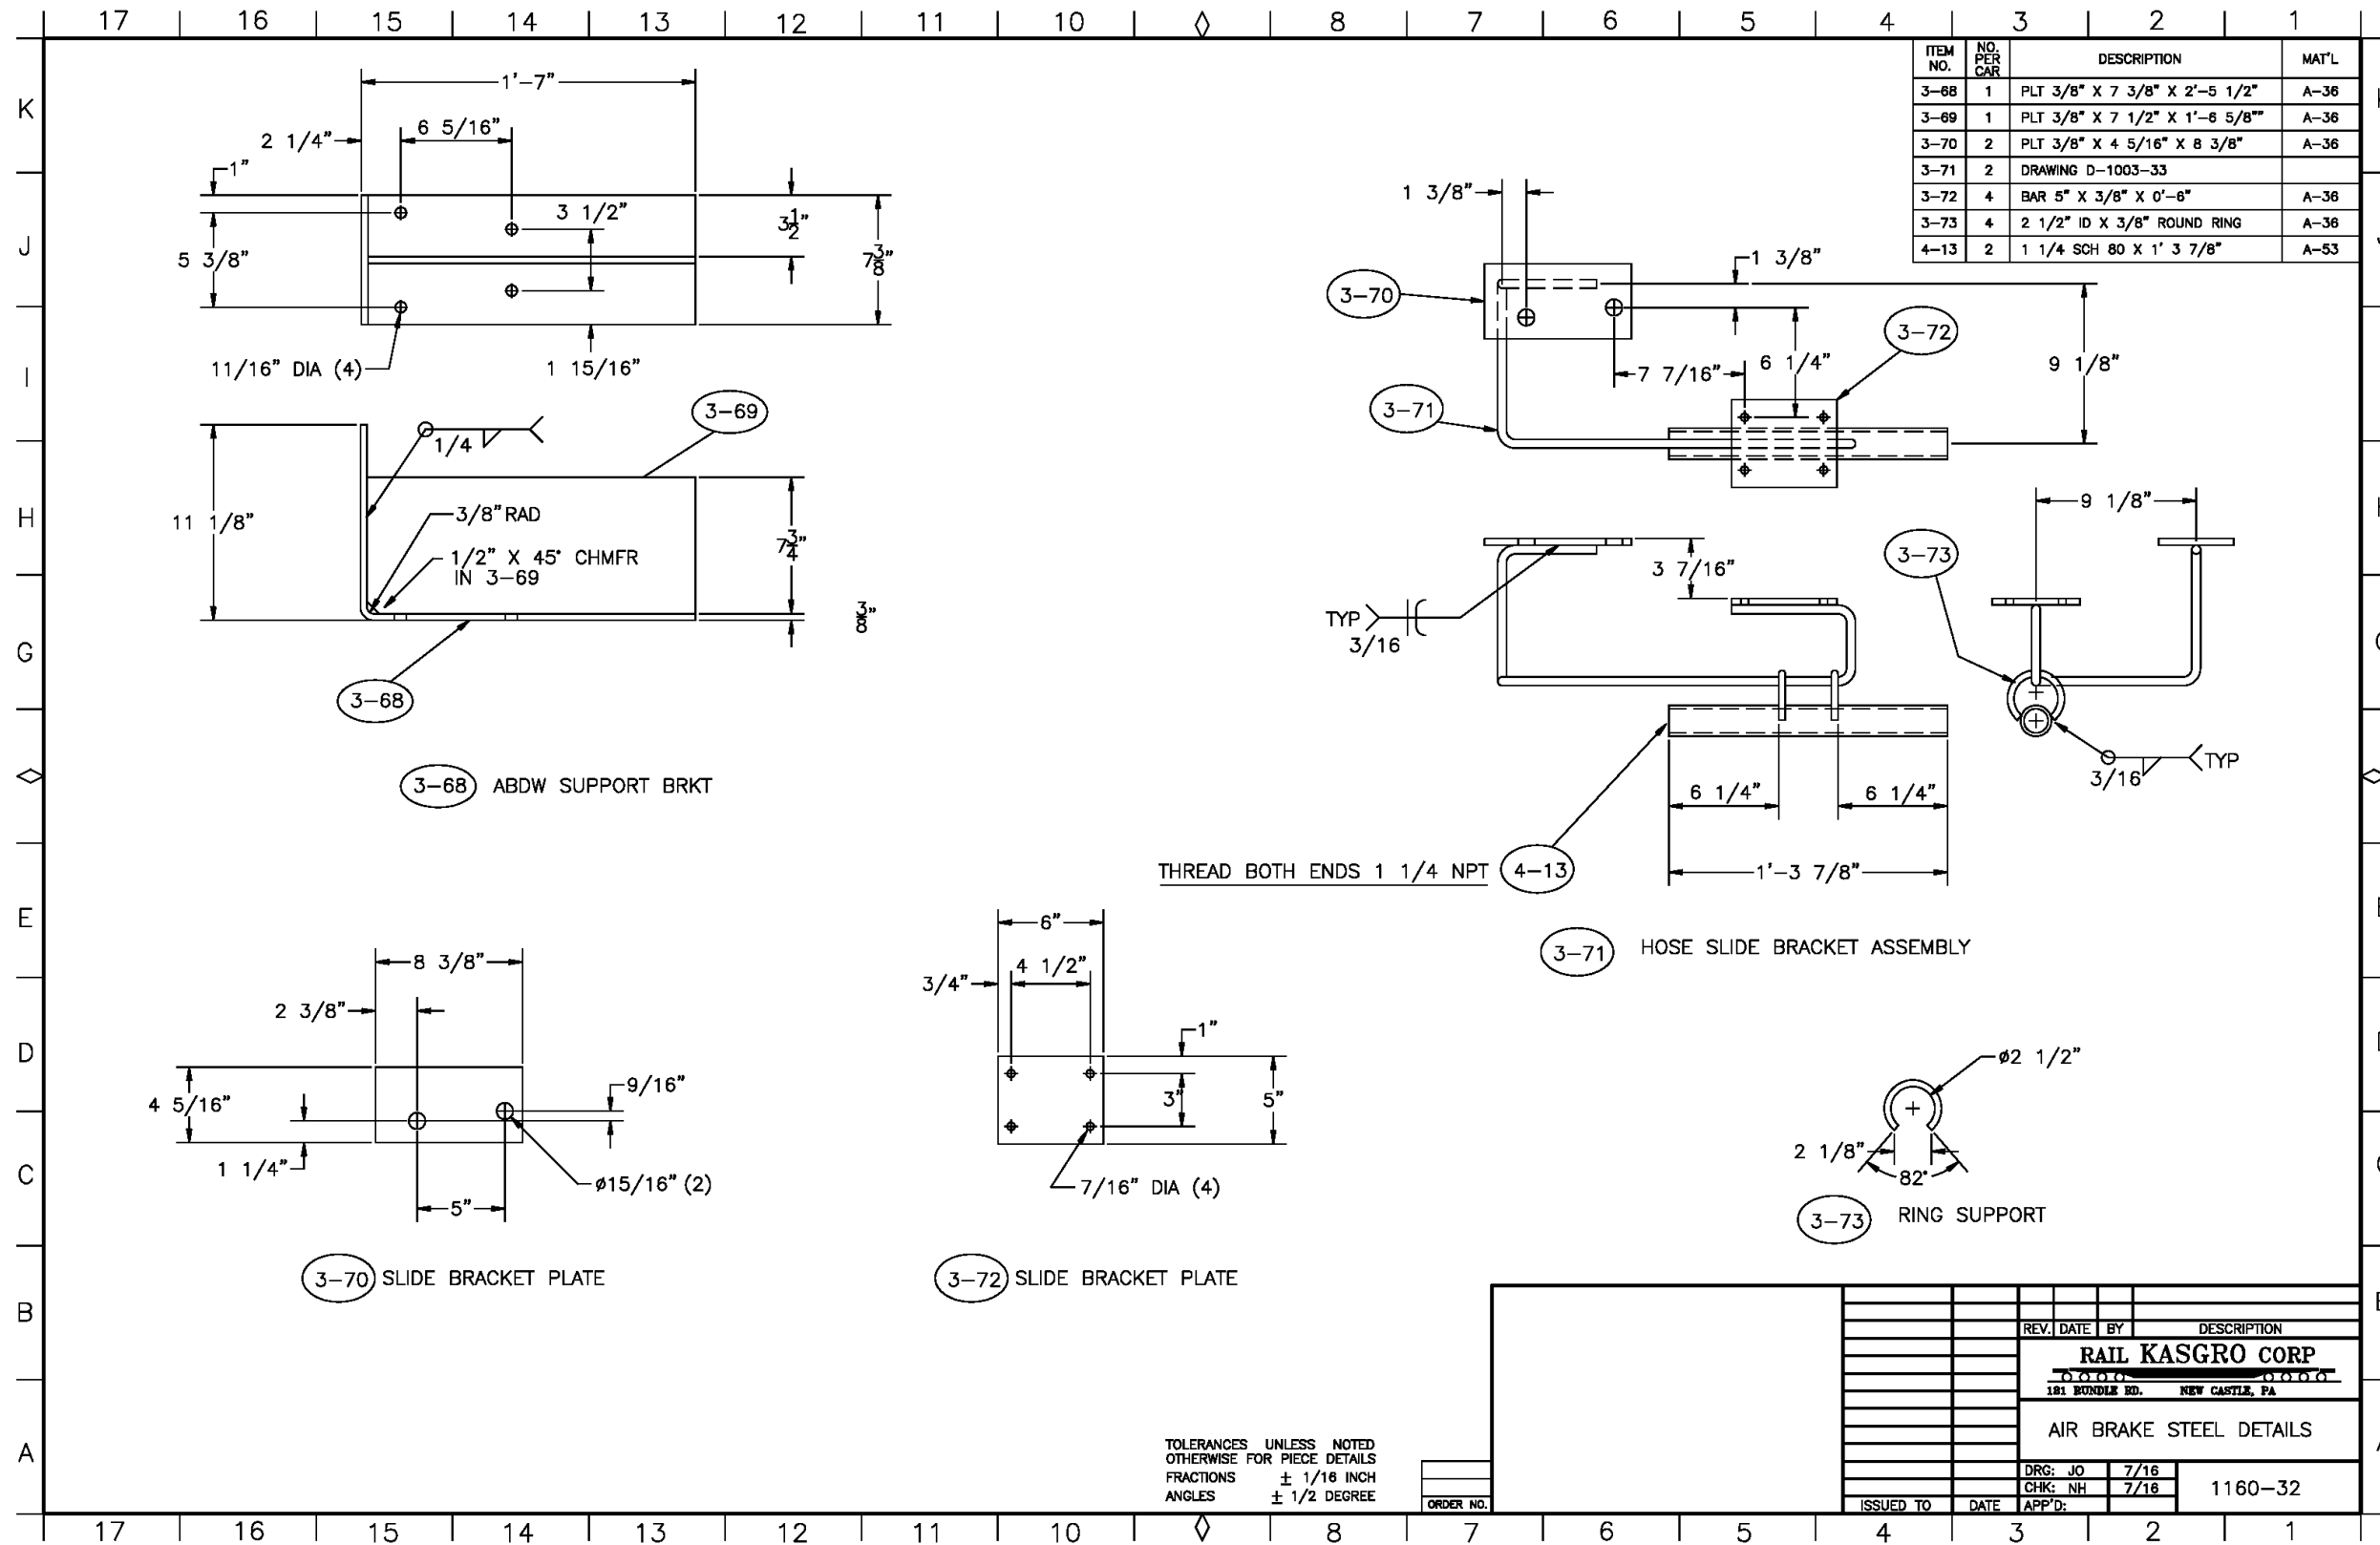


Appendix H-1.33 Air Brake Steel Details

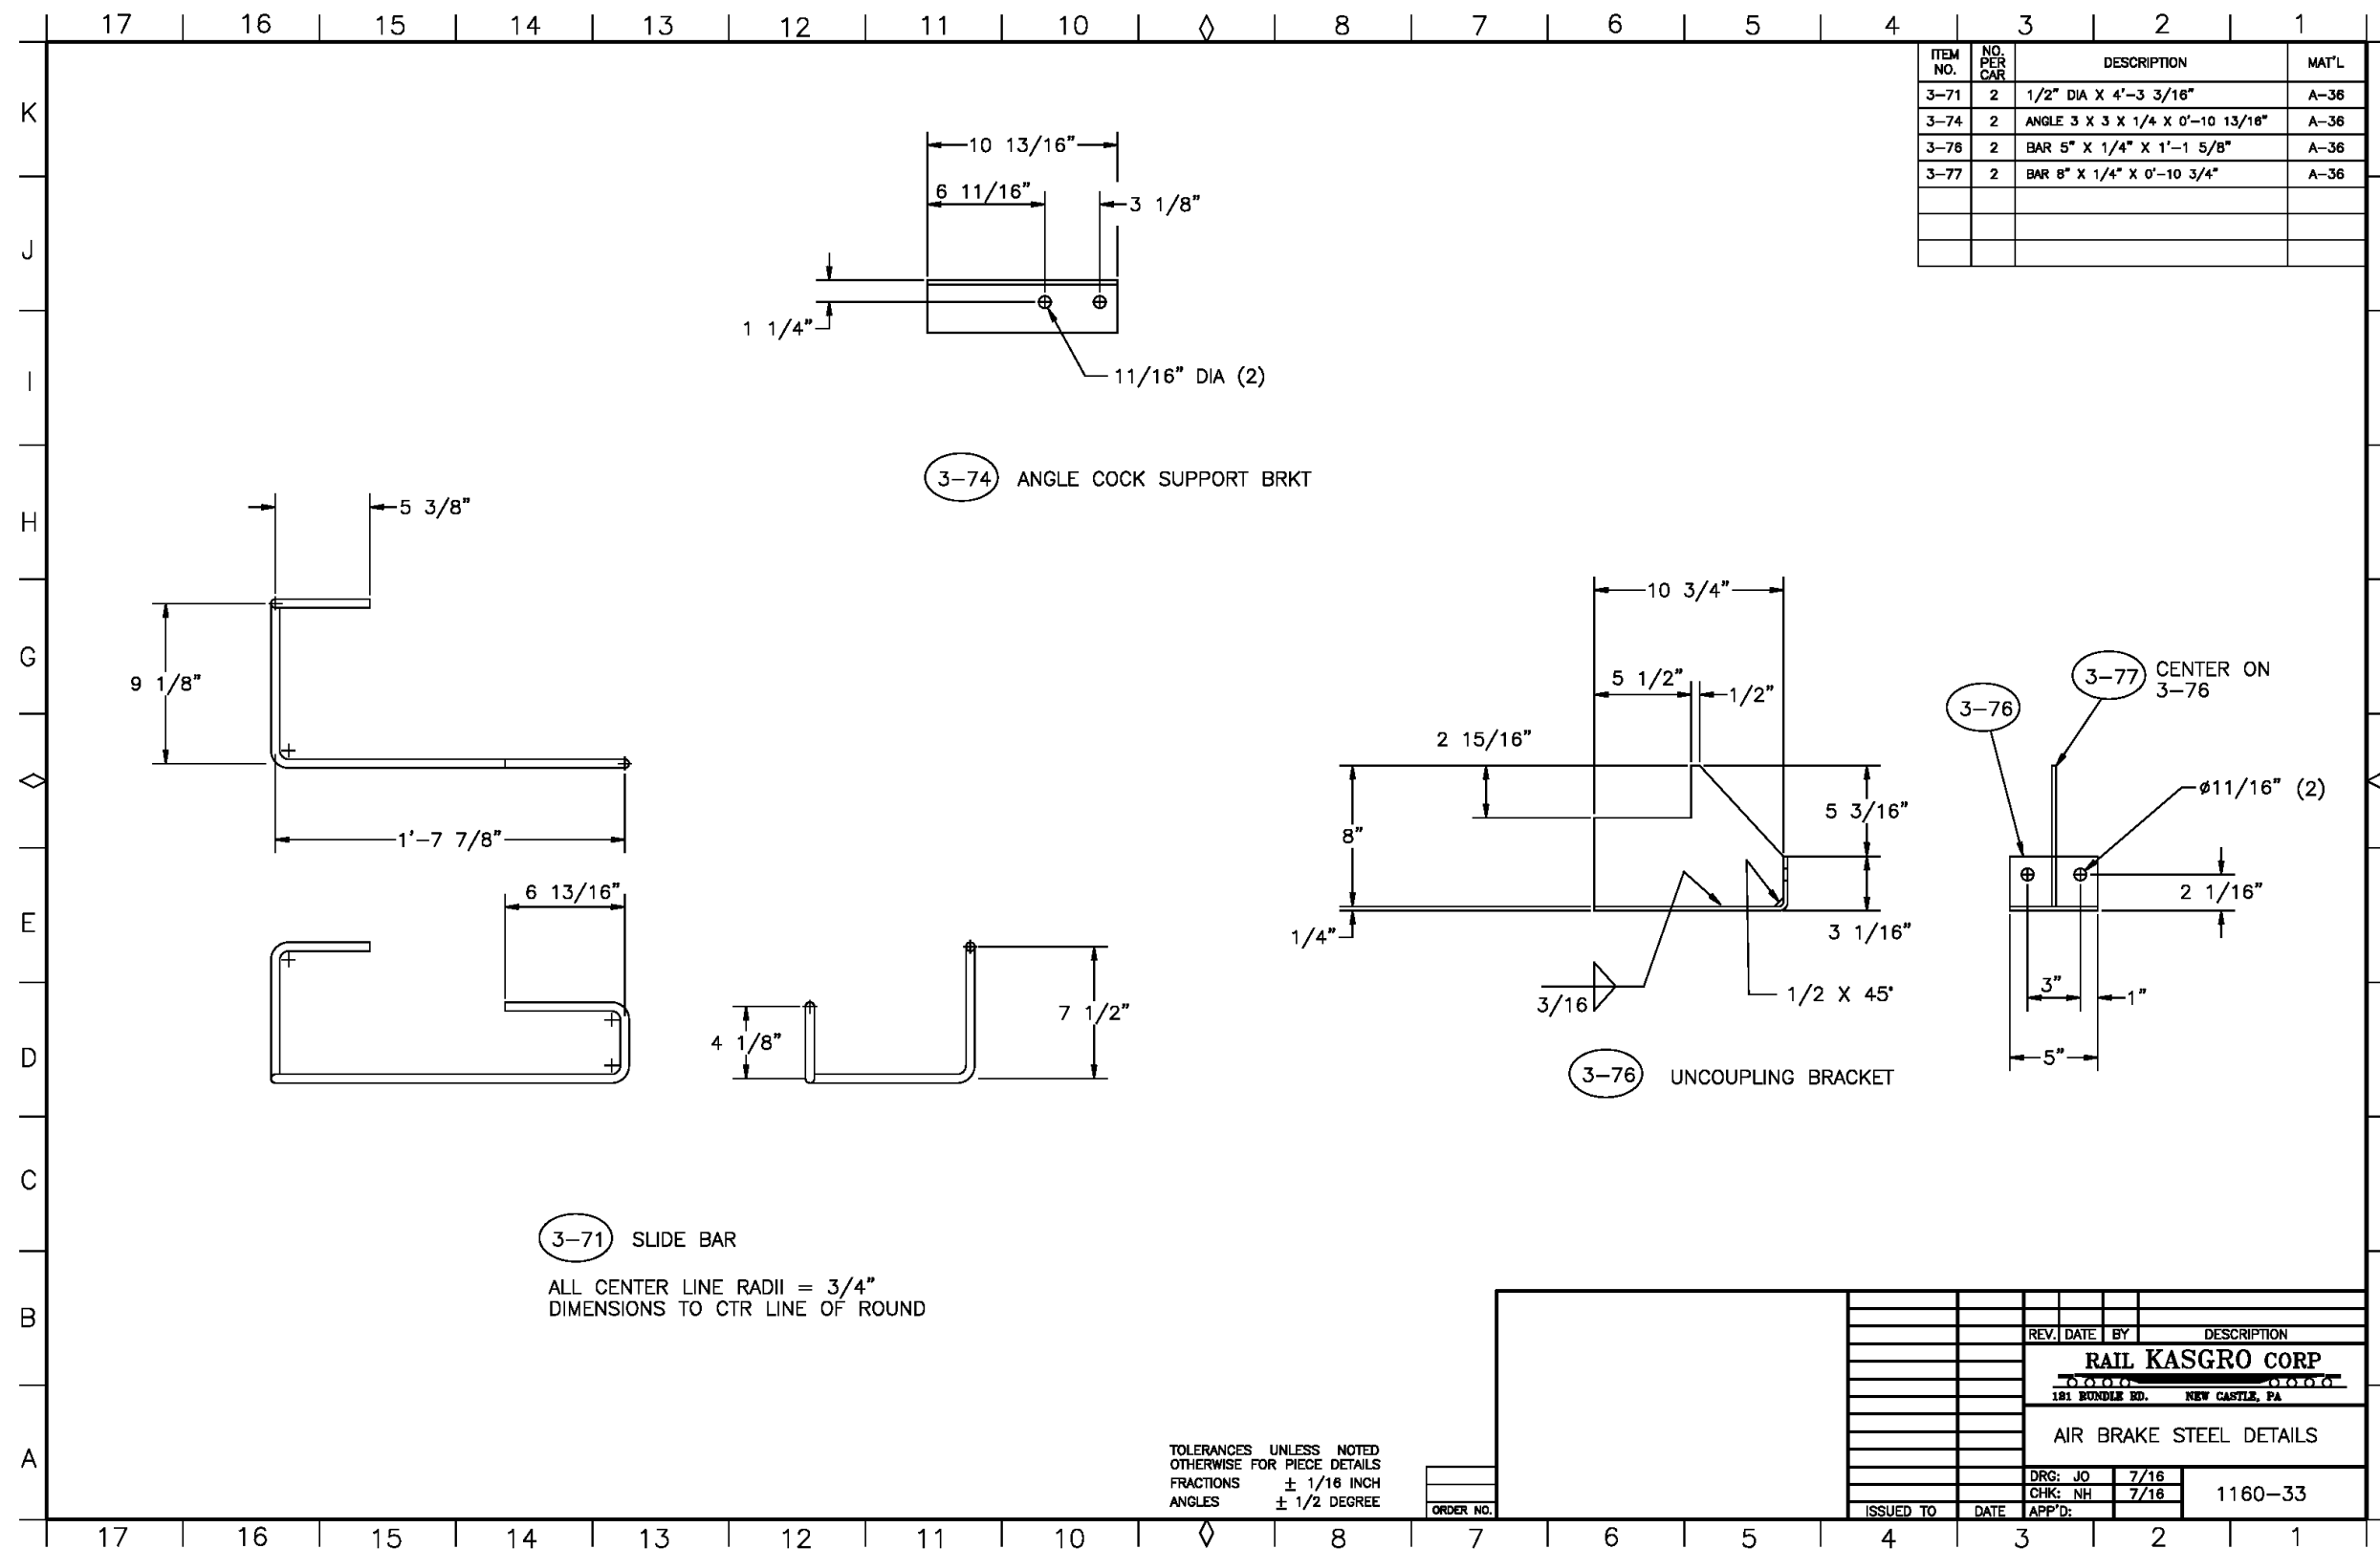


Appendix H-1.34 Pipe Details

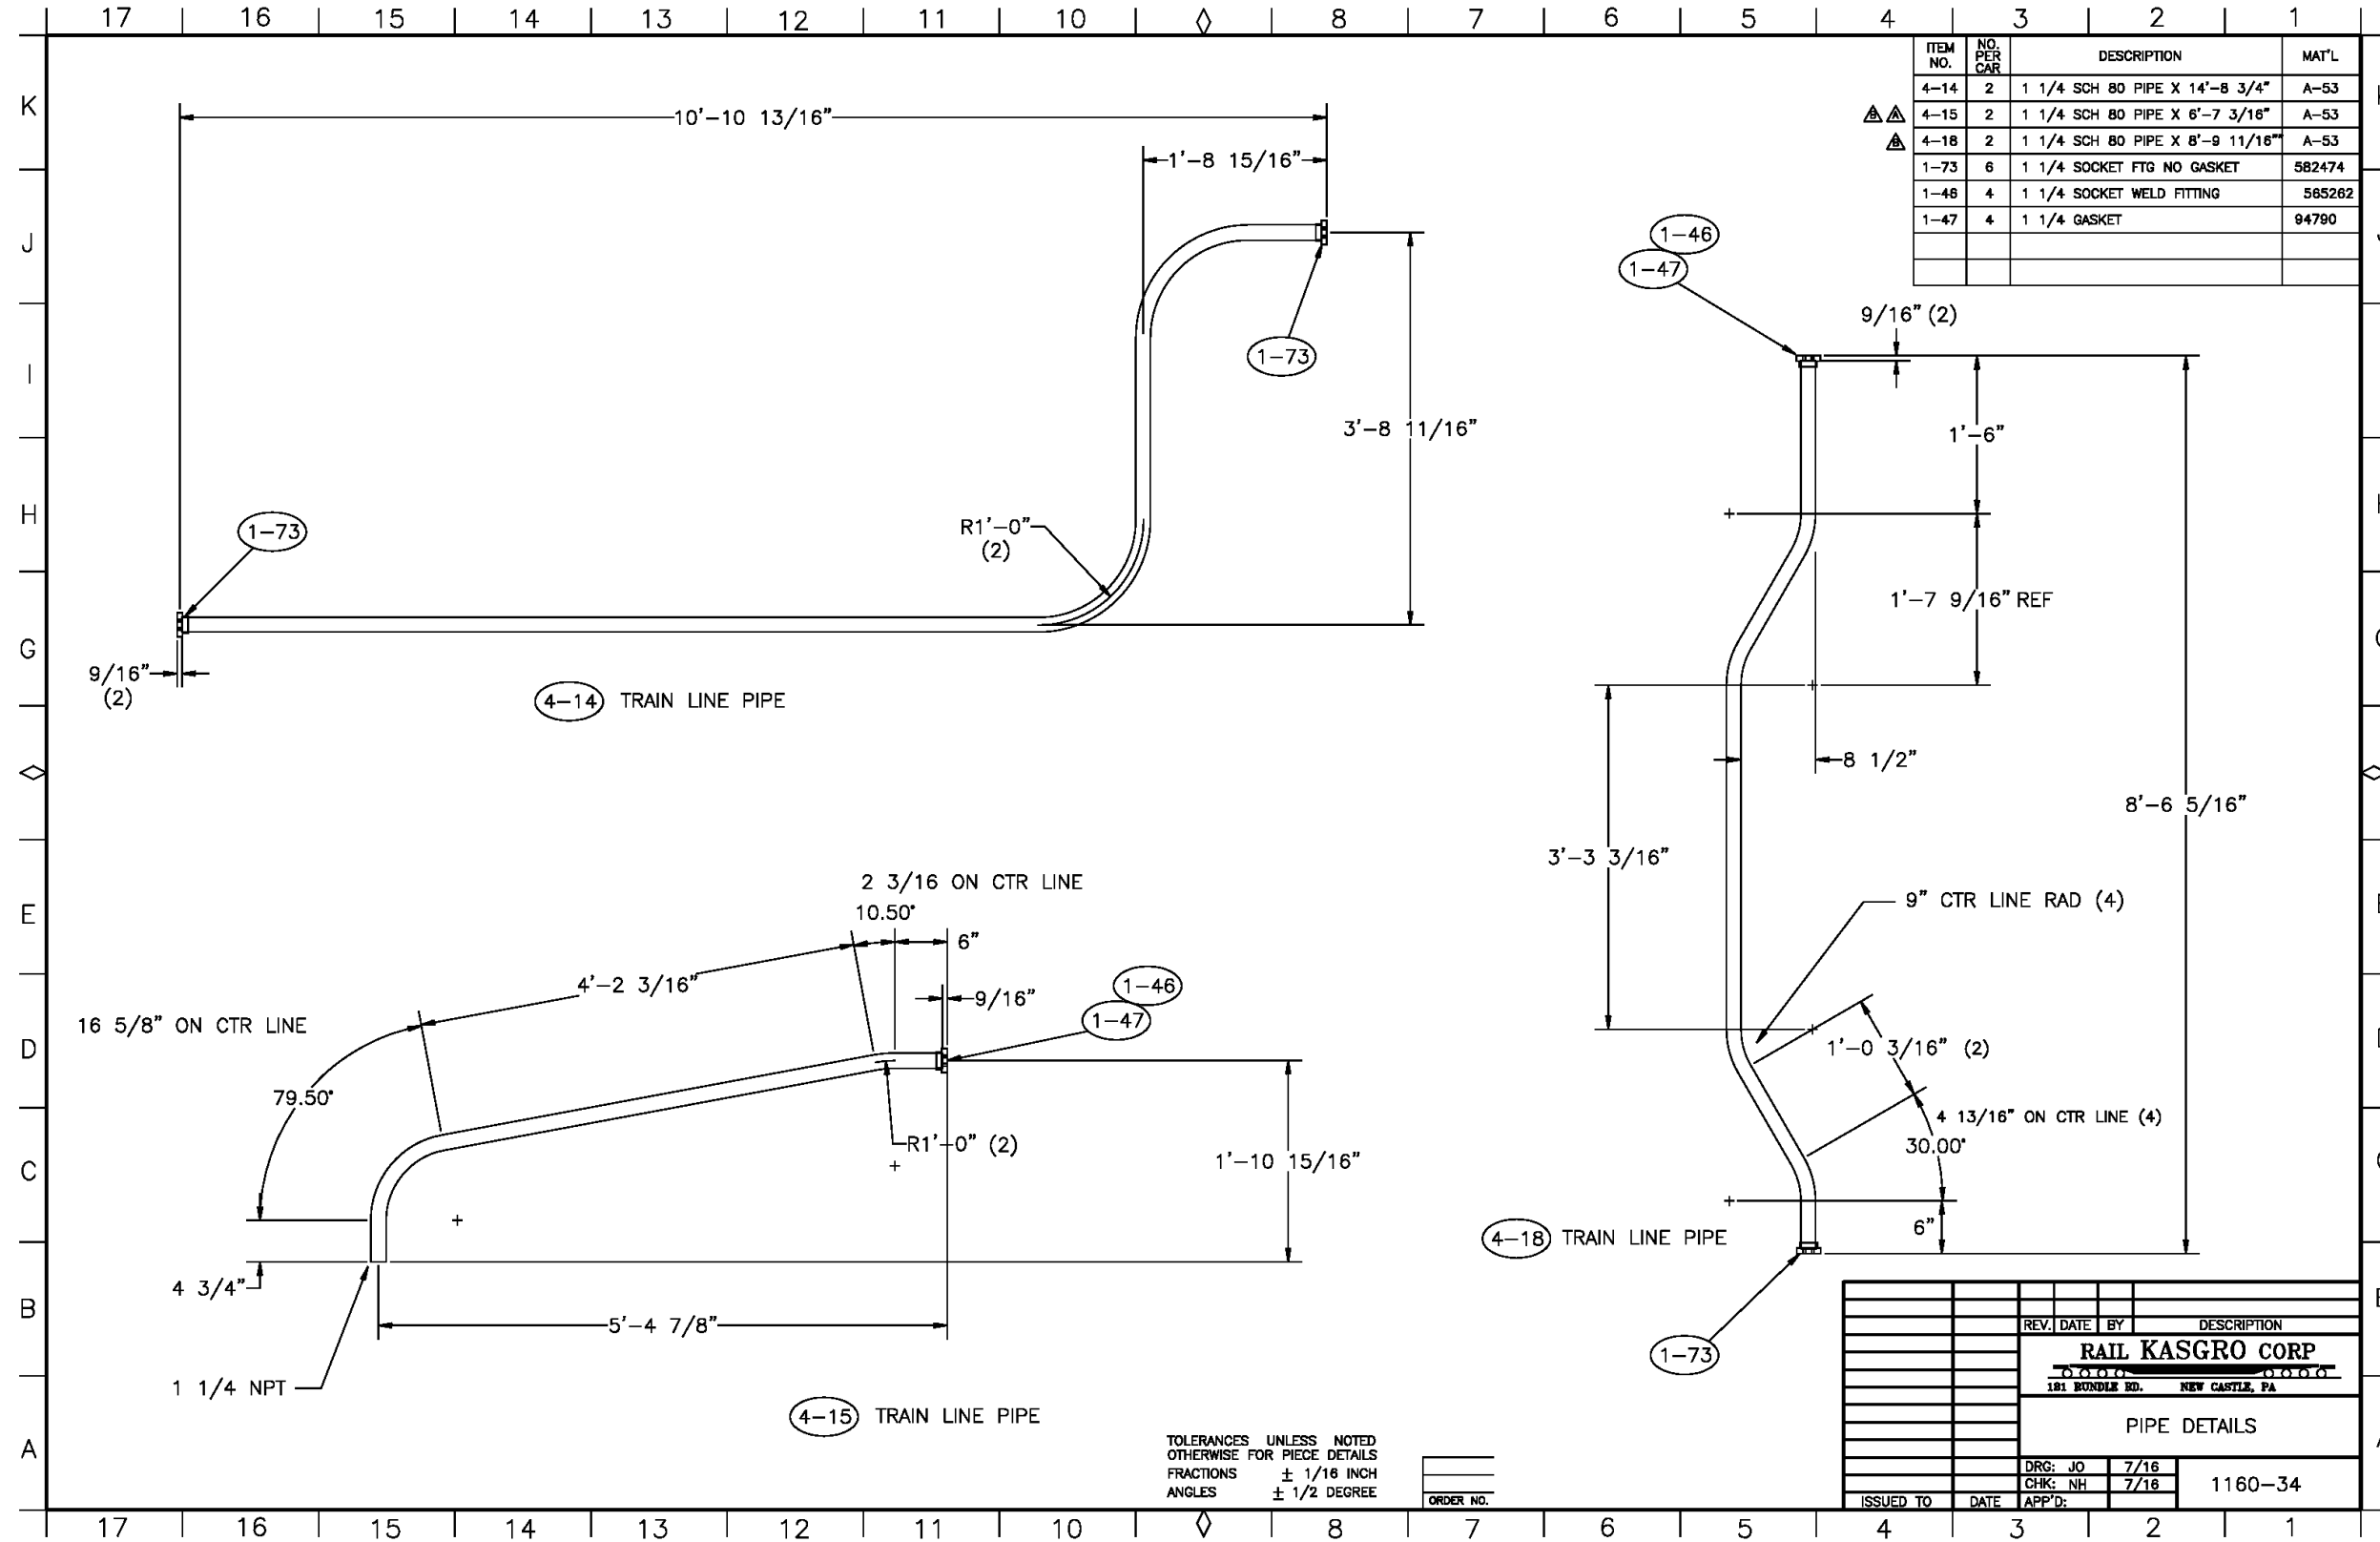

Appendix H-1.35 Camber Diagram

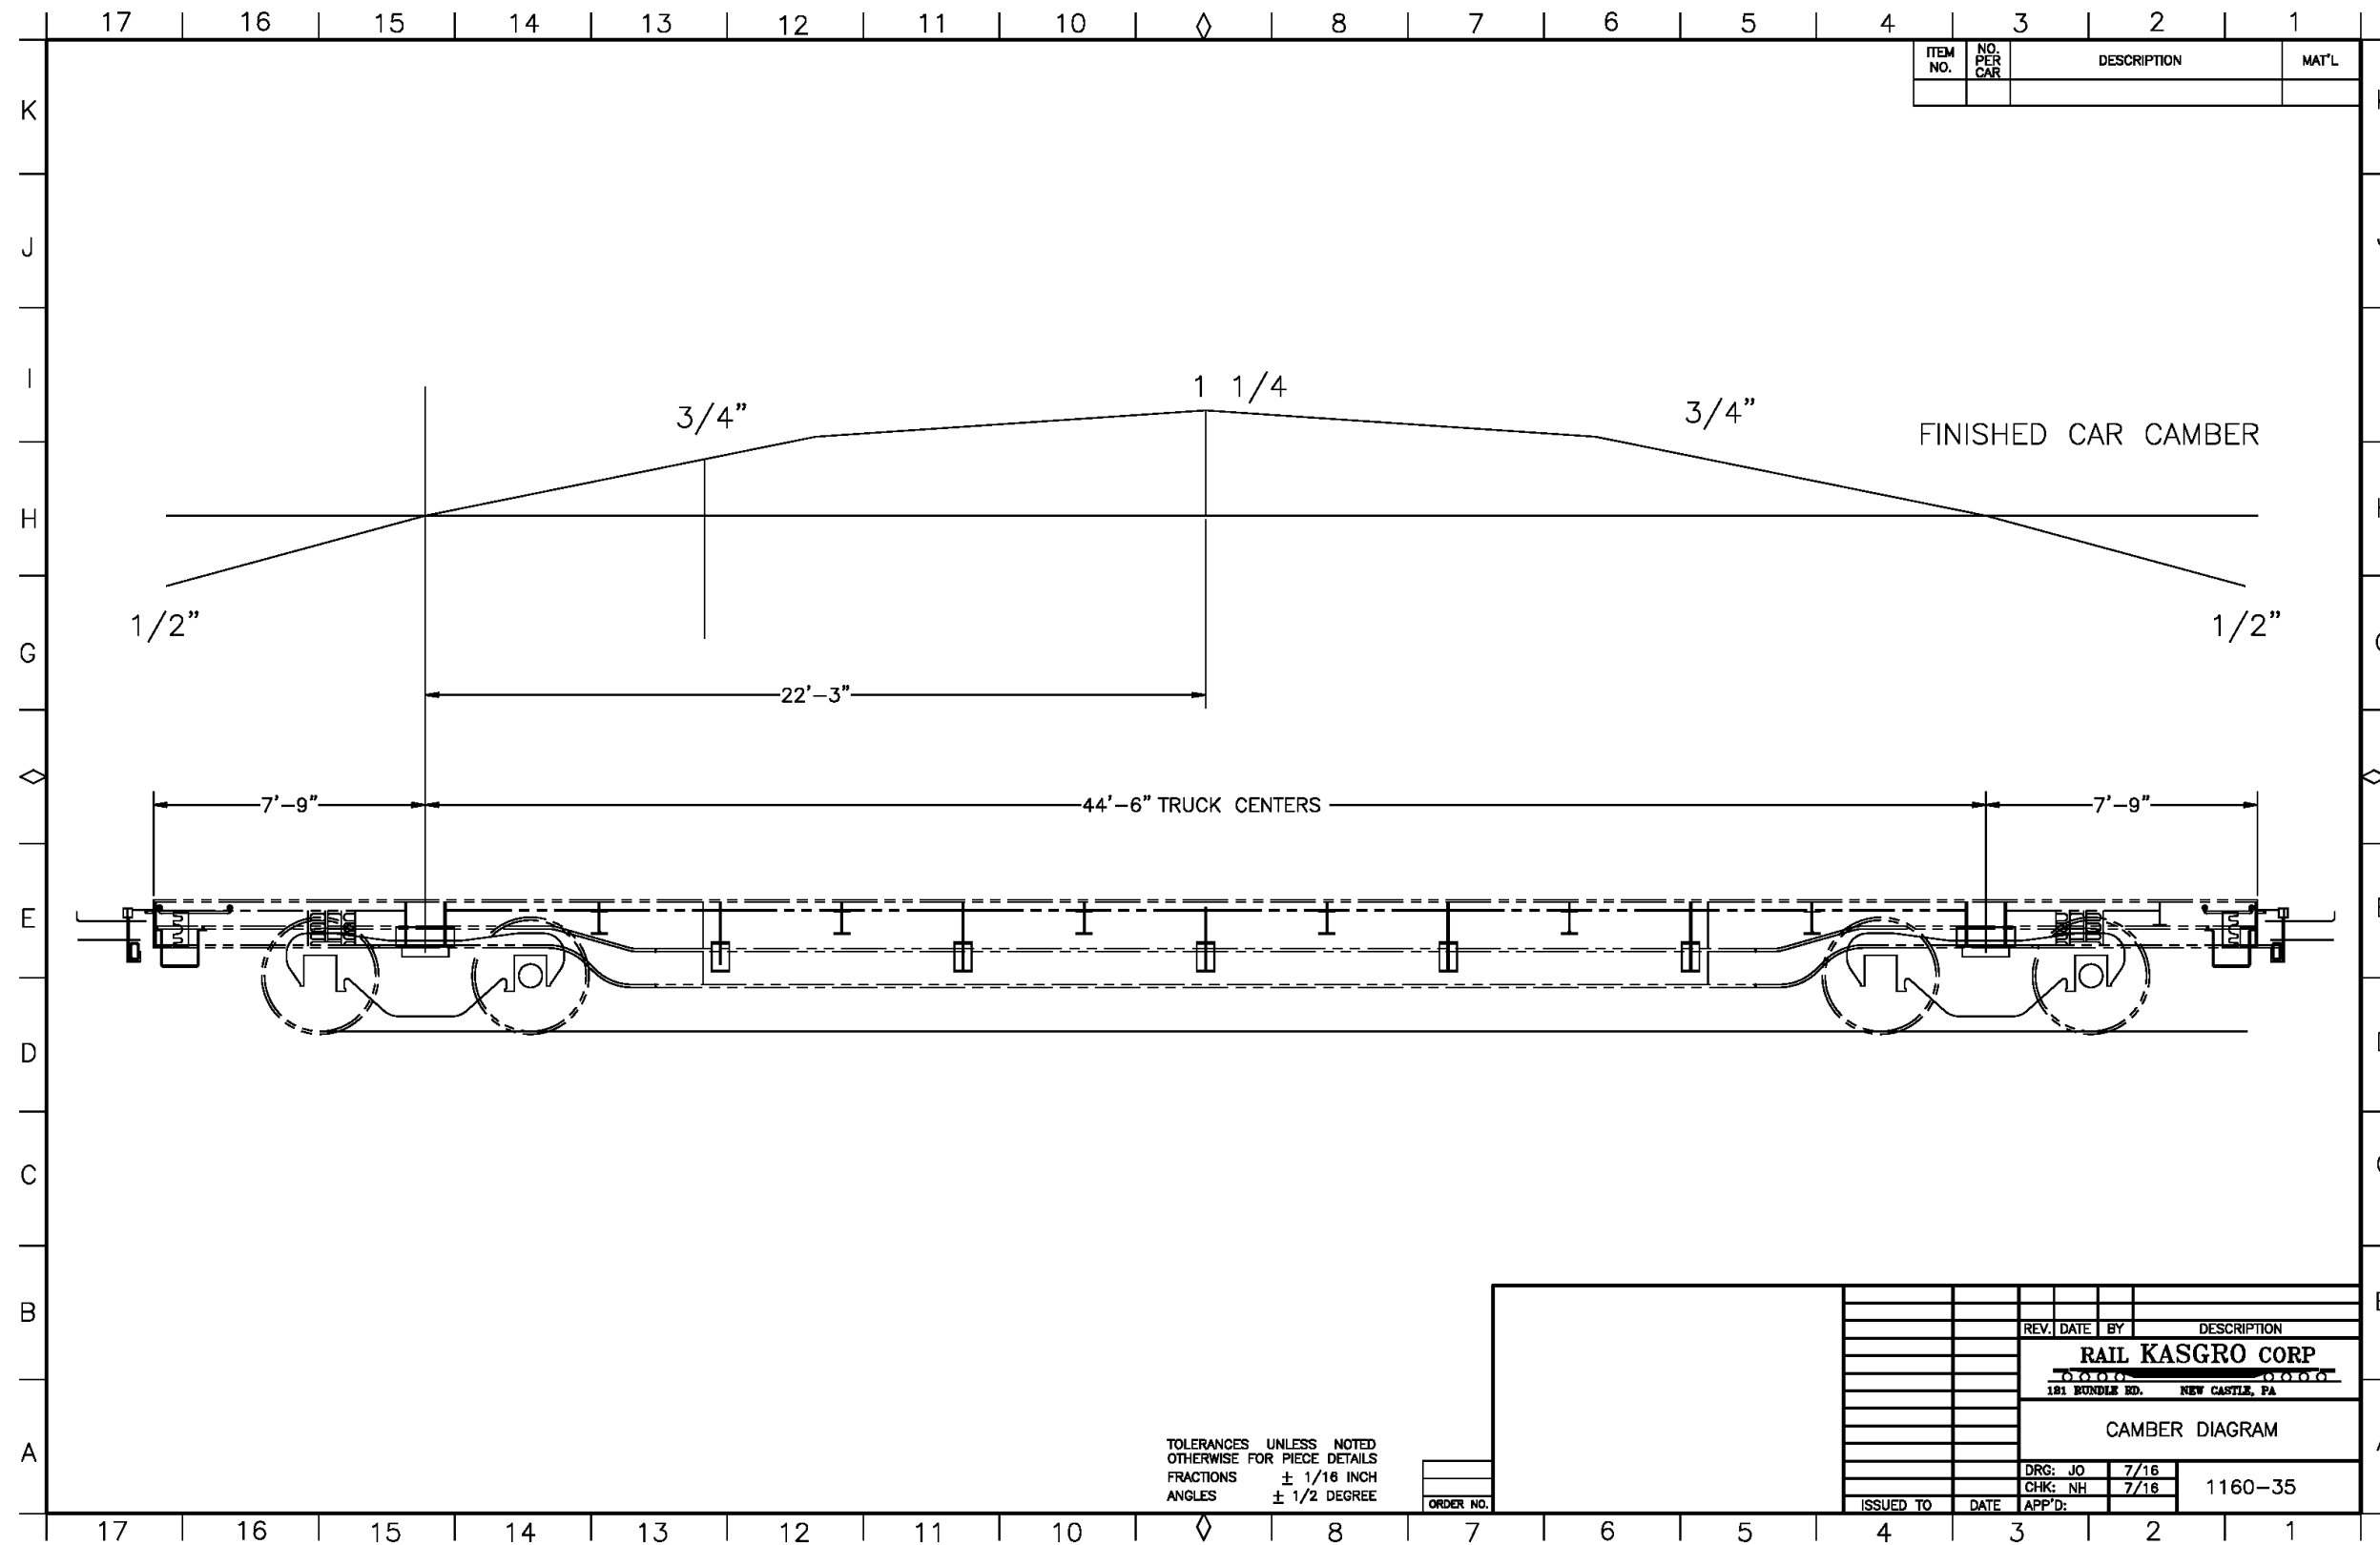


Appendix H-1.36 Pipe Details

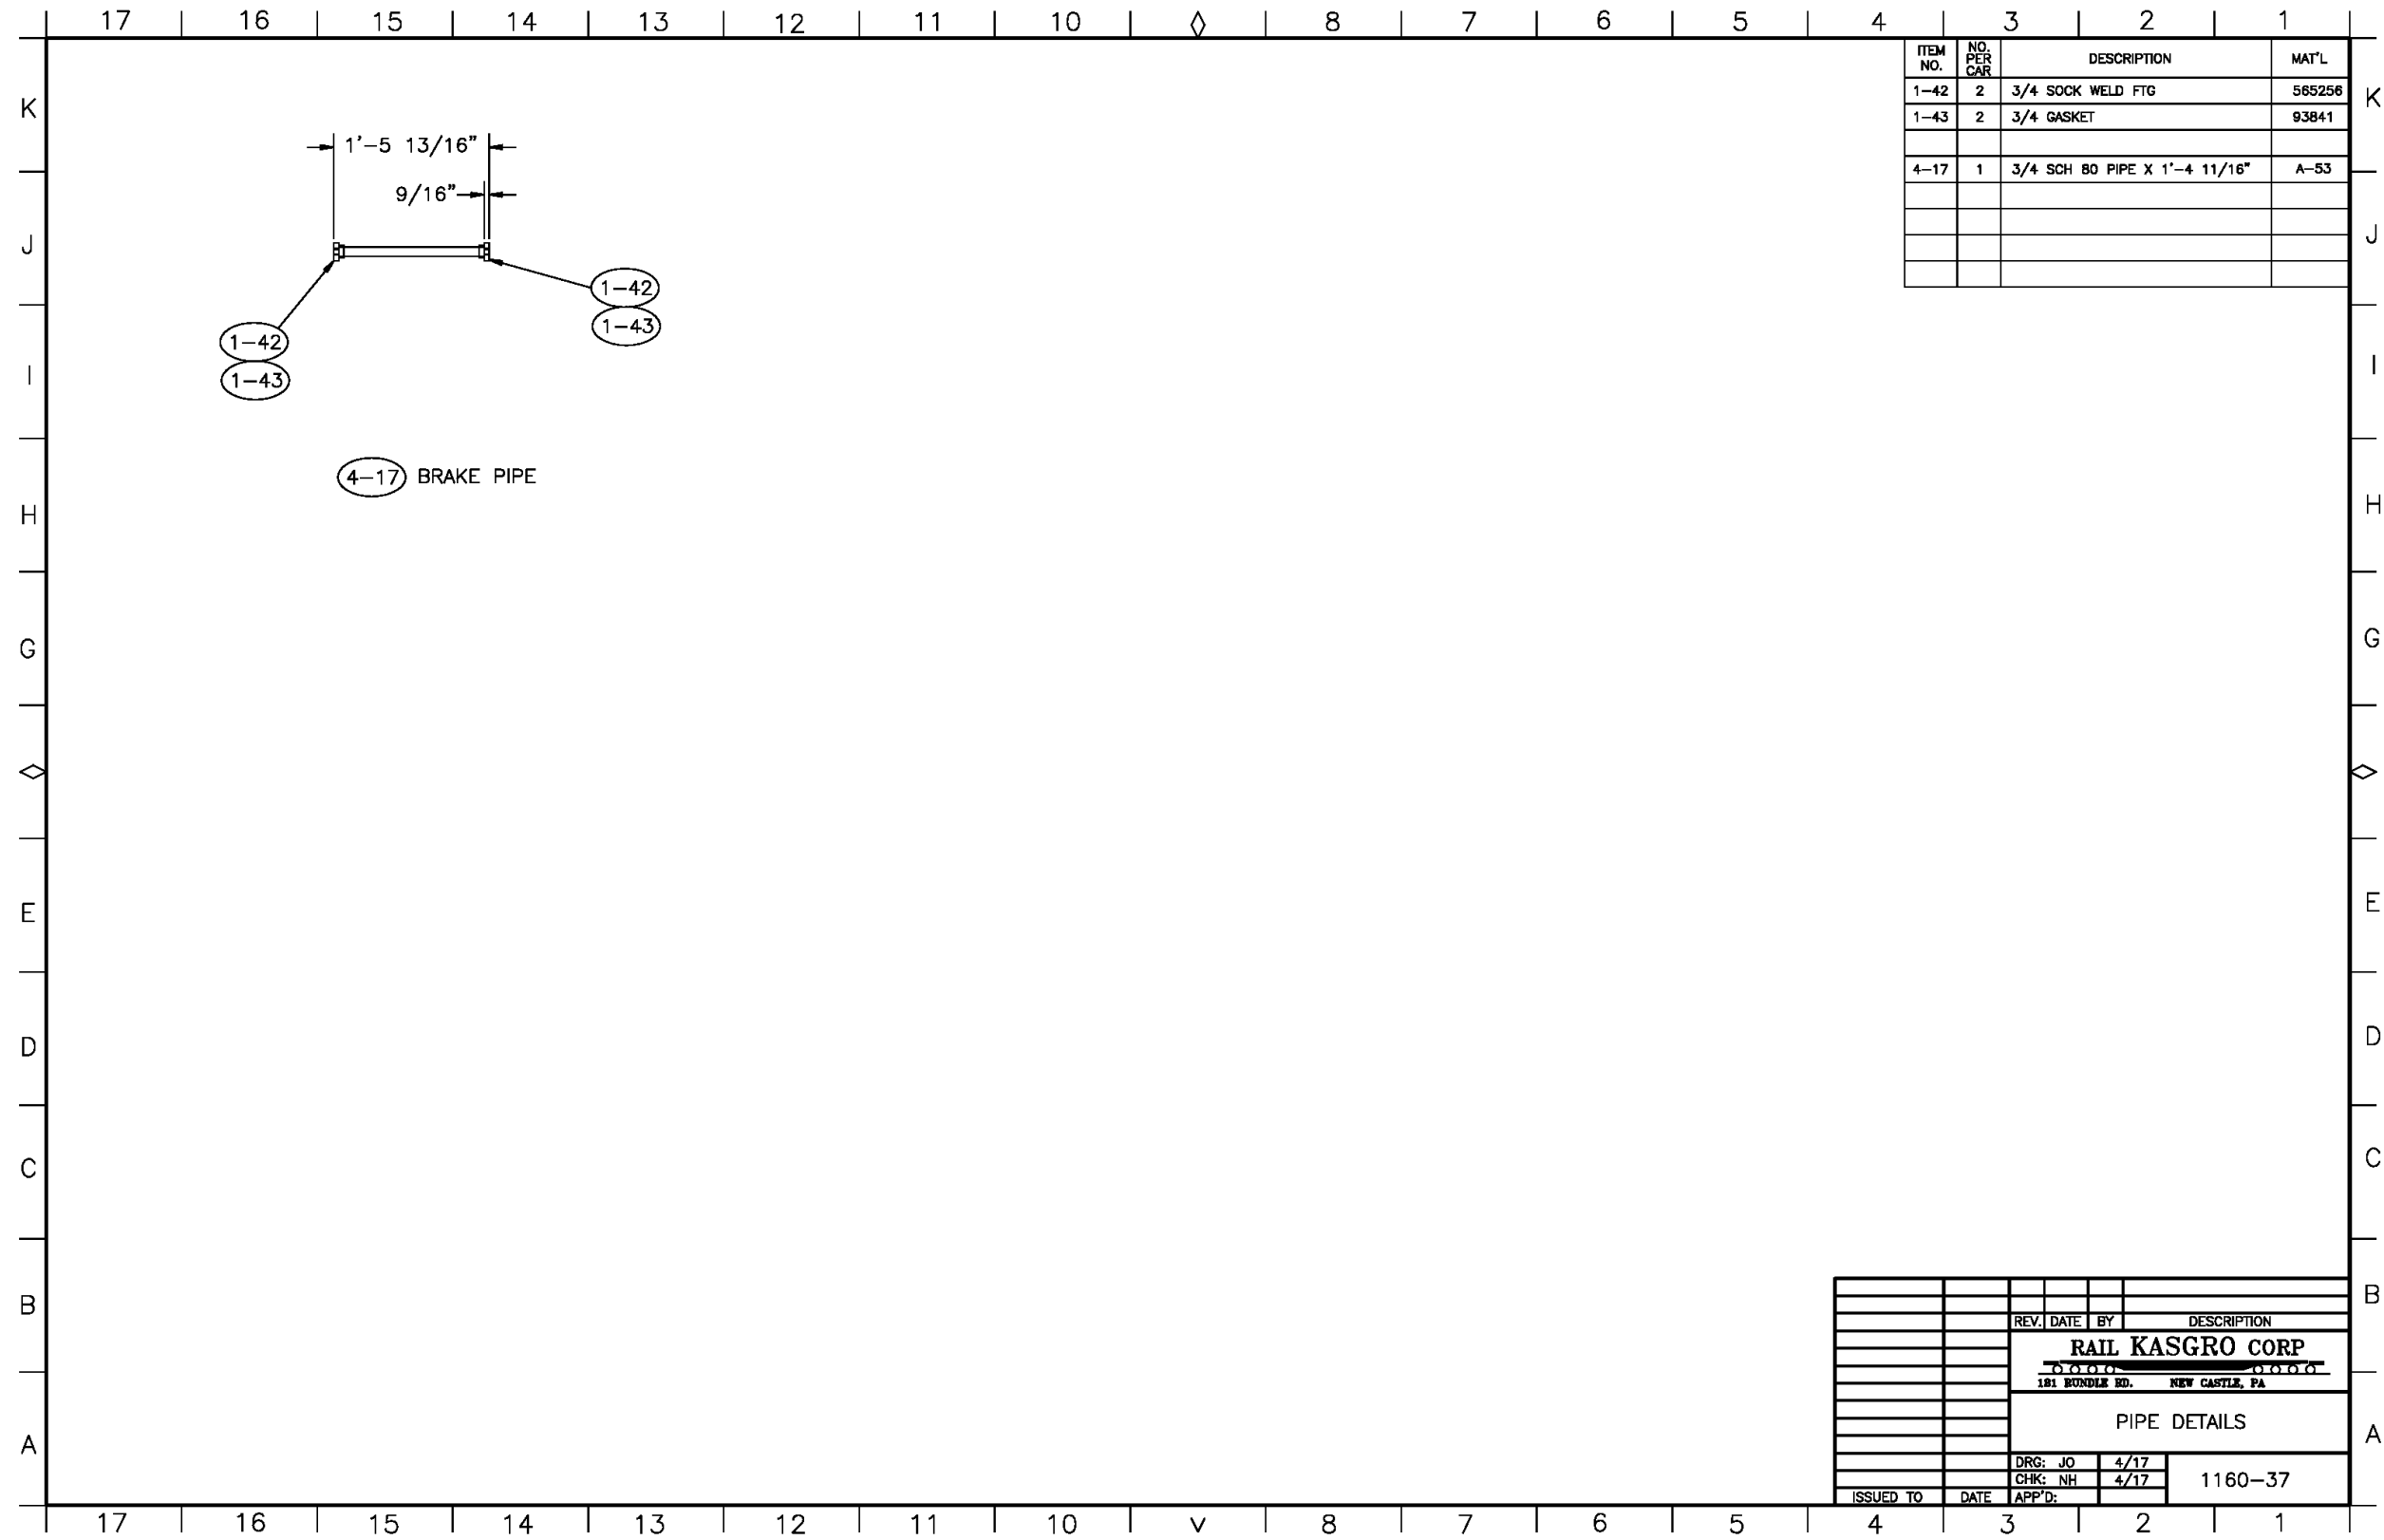


ITEM NO.	NO. PER CAR	DESCRIPTION	MAT'L
1-42	2	3/4 SOCK WELD FTG	565256
1-43	2	3/4 GASKET	93841
4-17	1	3/4 SCH 80 PIPE X 1'-4 11/16"	A-53

REV.	DATE	BY	DESCRIPTION
<b>RAIL KASGRO CORP</b>			
181 BUNDLER RD. NEW CASTLE, PA			
PIPE DETAILS			
DRG:	JO	4/17	
CHK:	NH	4/17	1160-37
ISSUED TO	DATE	APP'D:	


Appendix H-1.37 Ballast Weight Arrangement

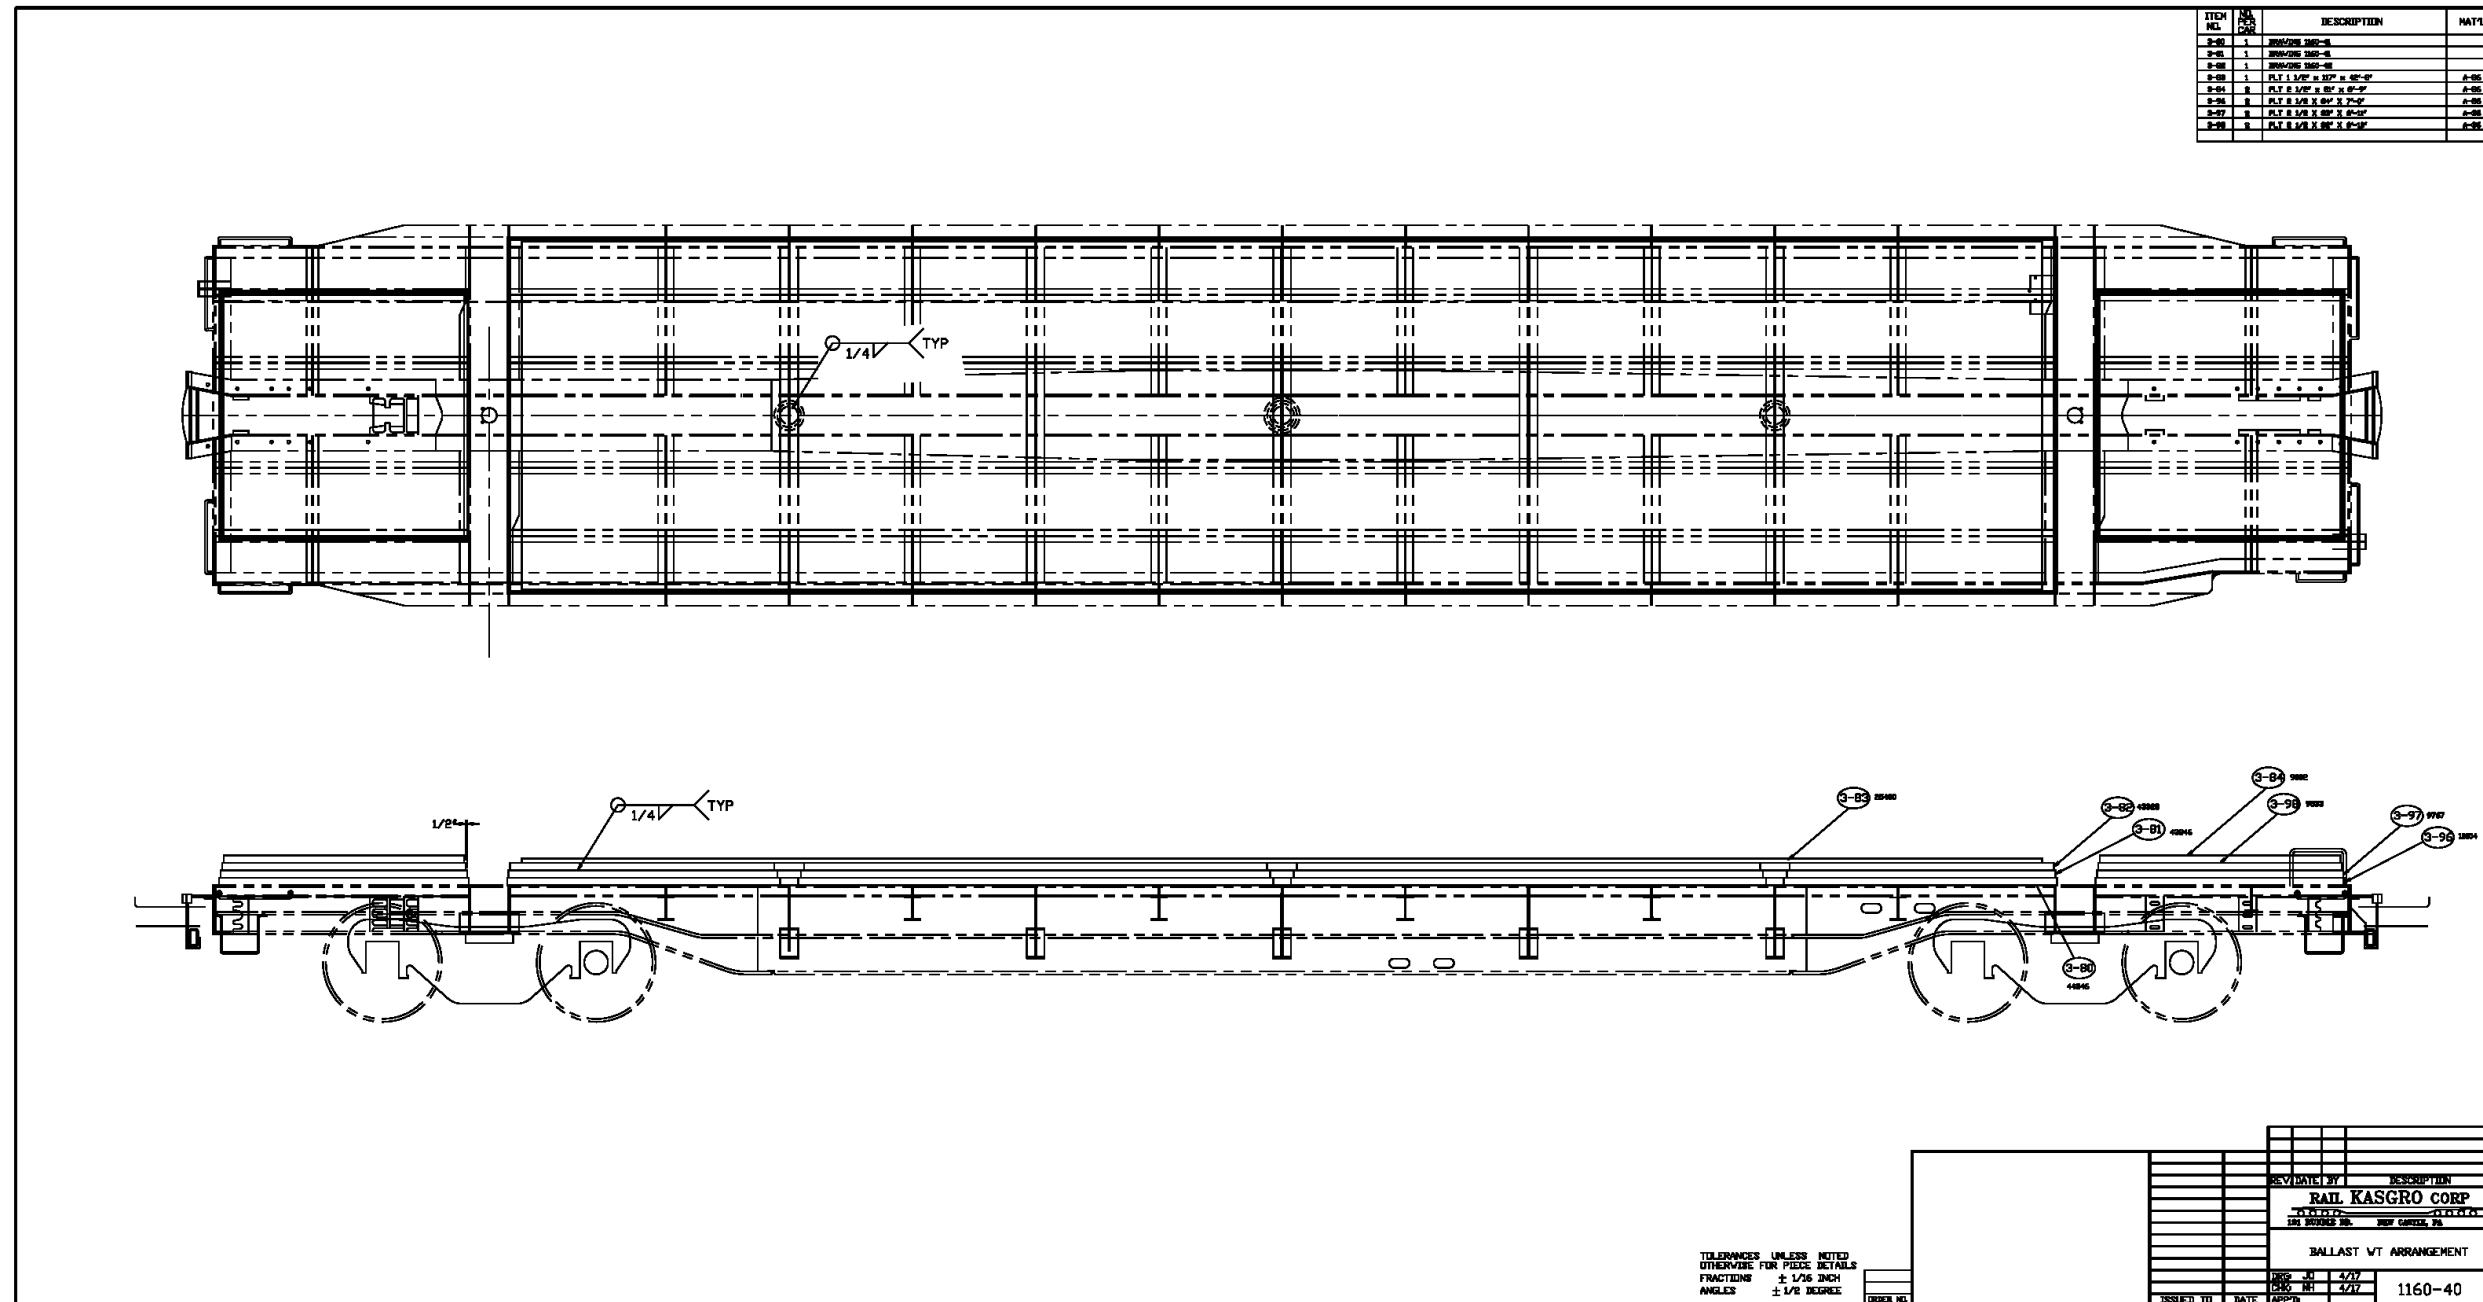


Appendix H-1.38 Dummy Weight

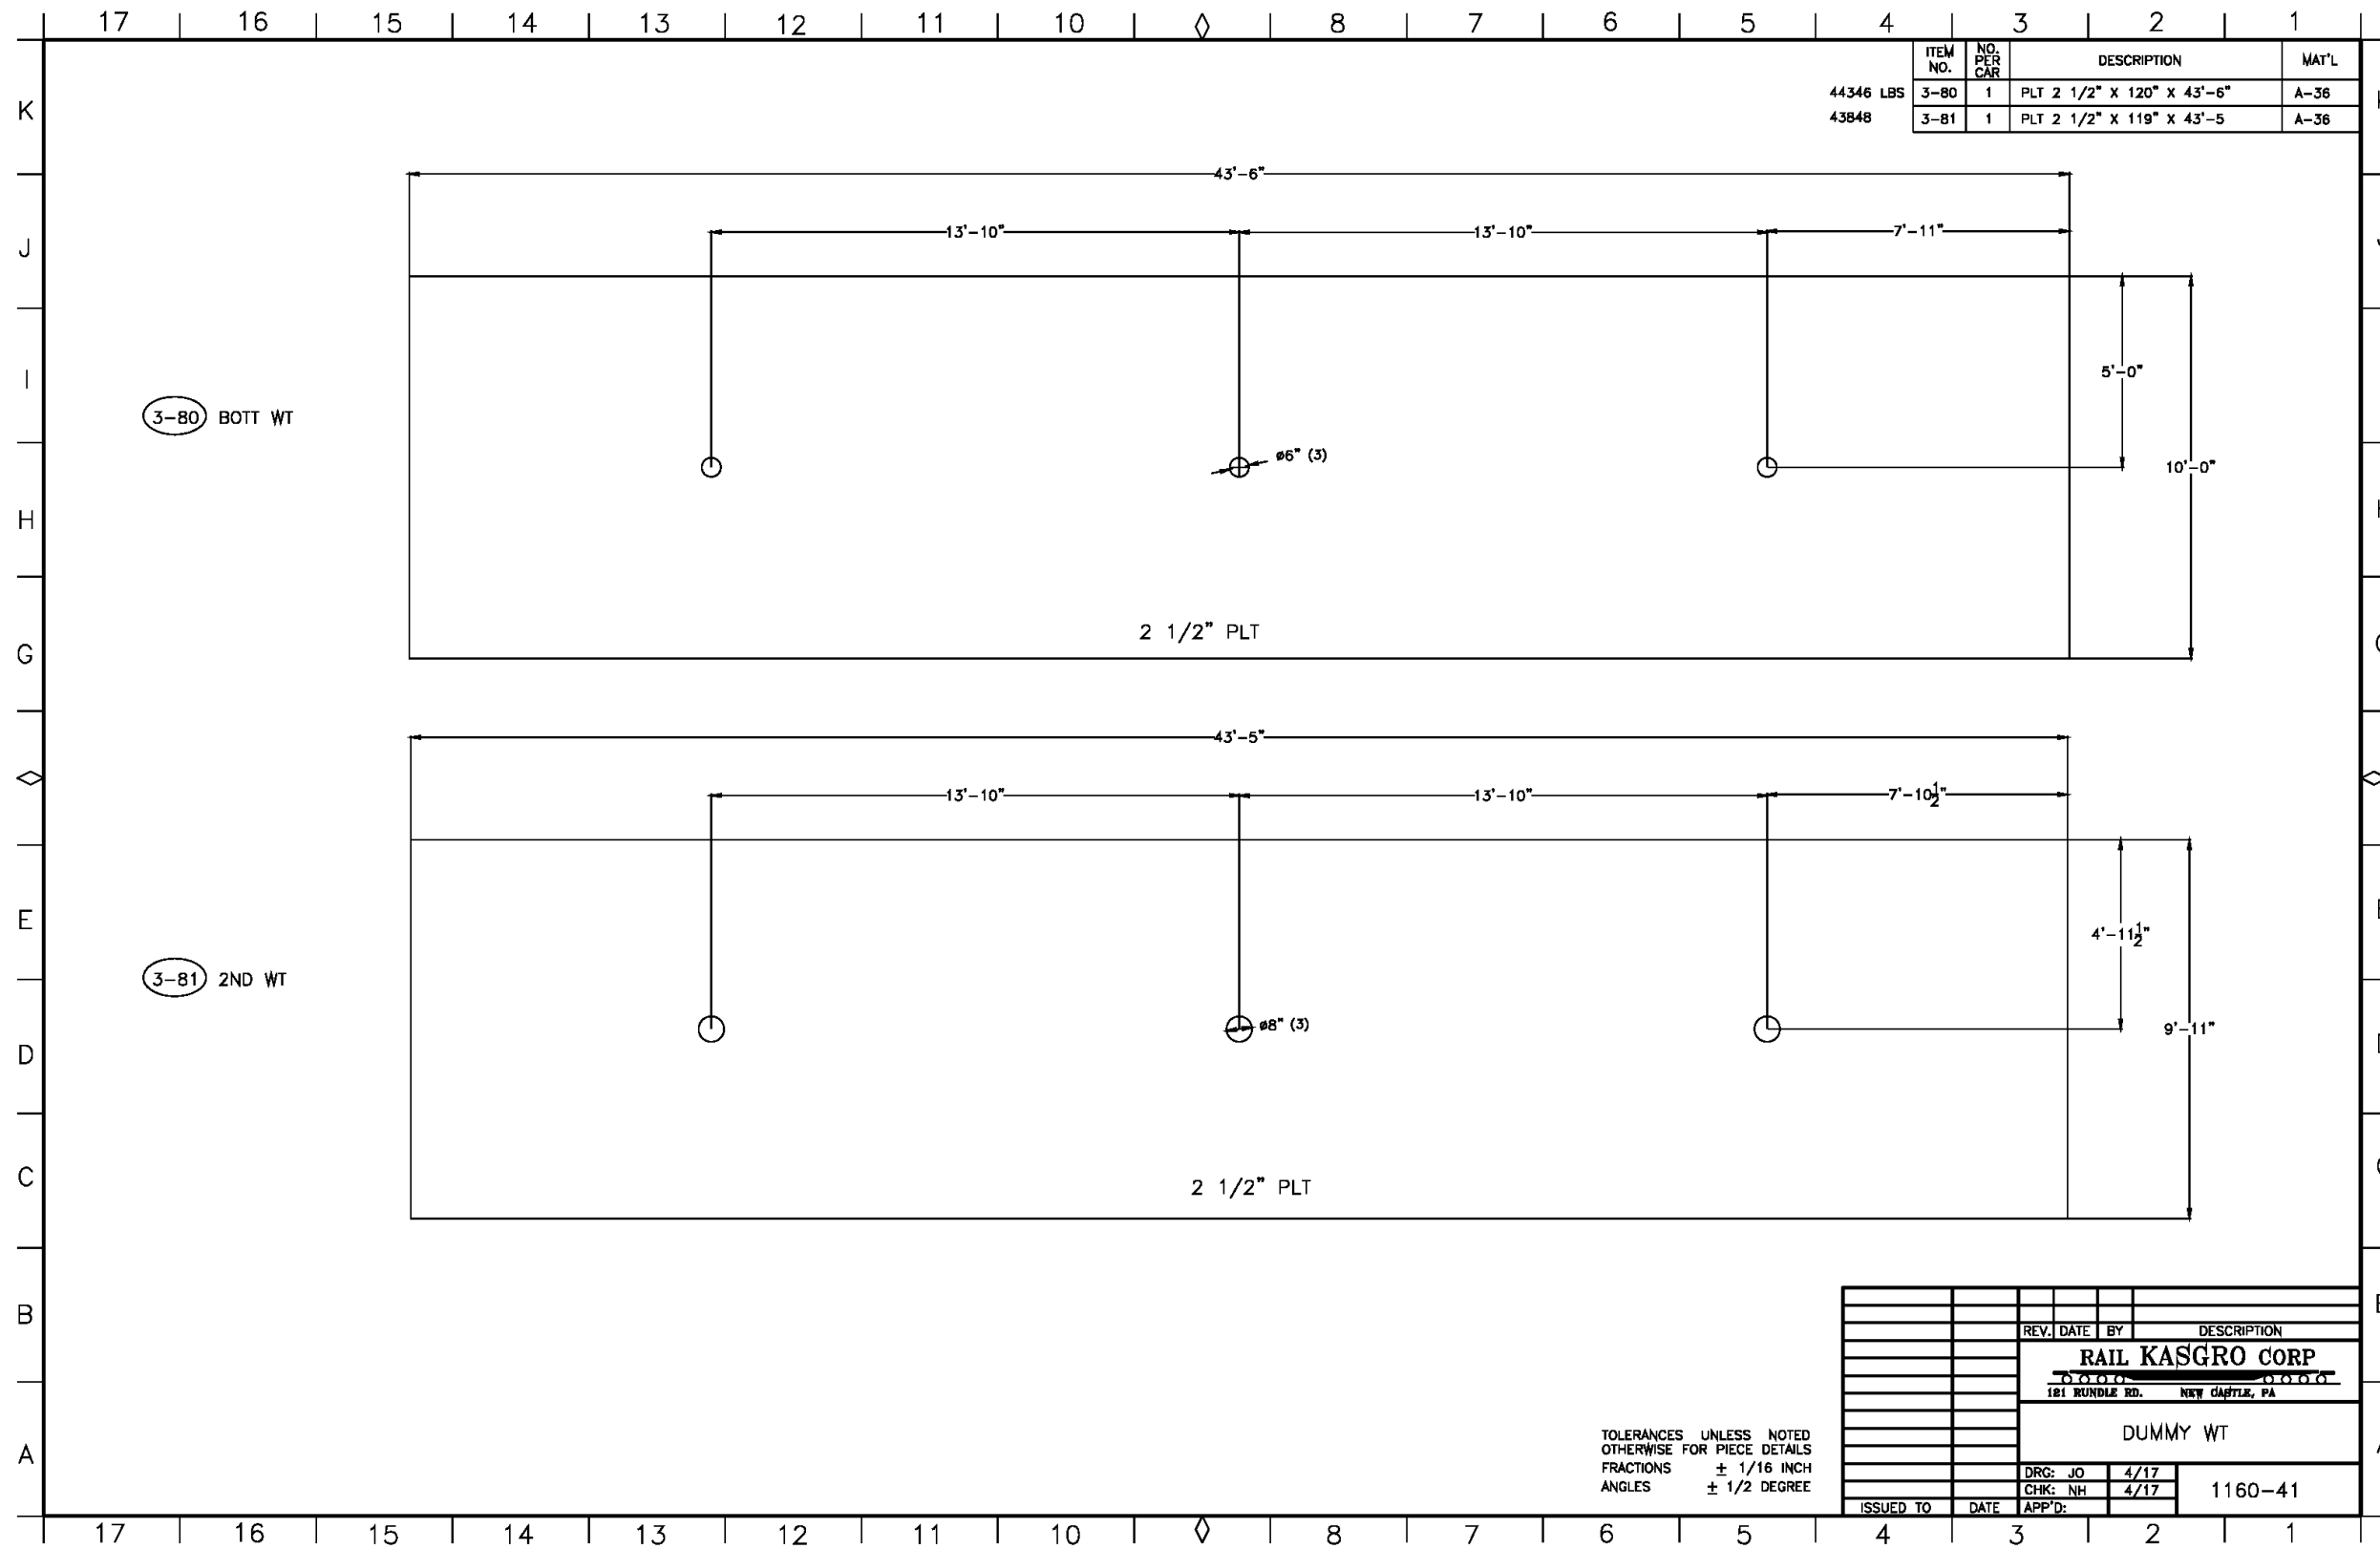


Appendix H-1.39 Dummy Weight

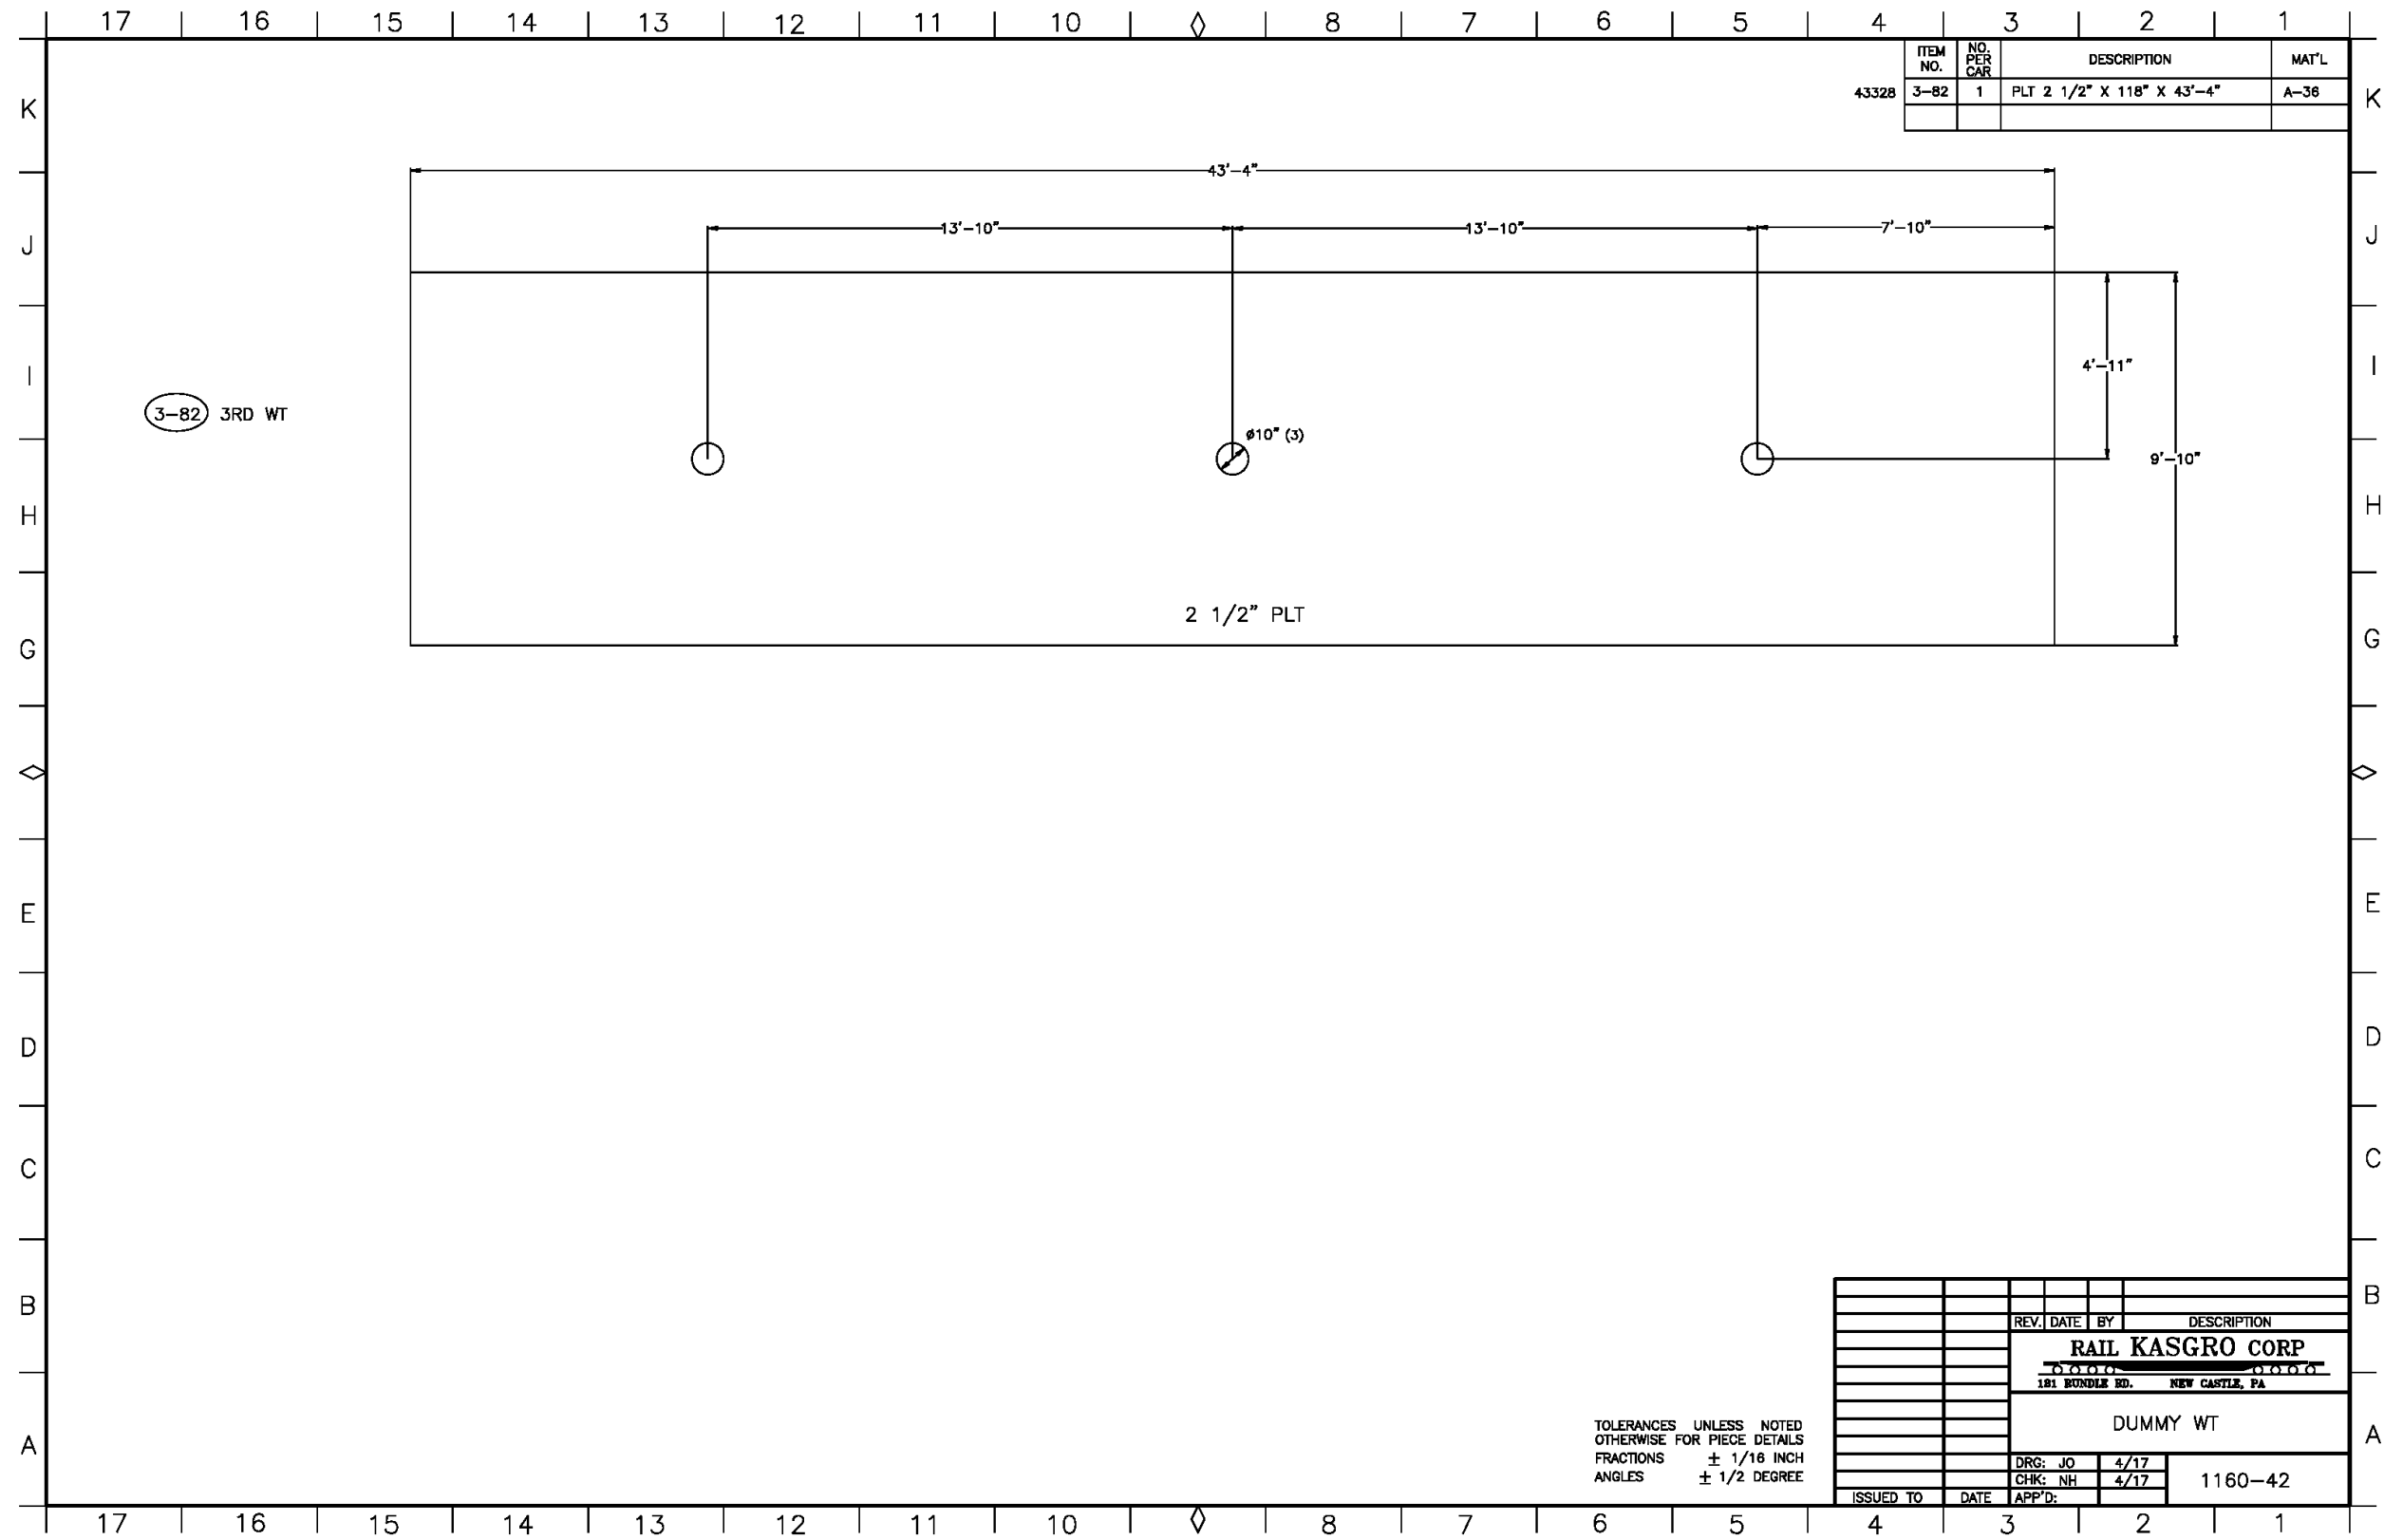


Appendix H-1.40 Dummy Weight

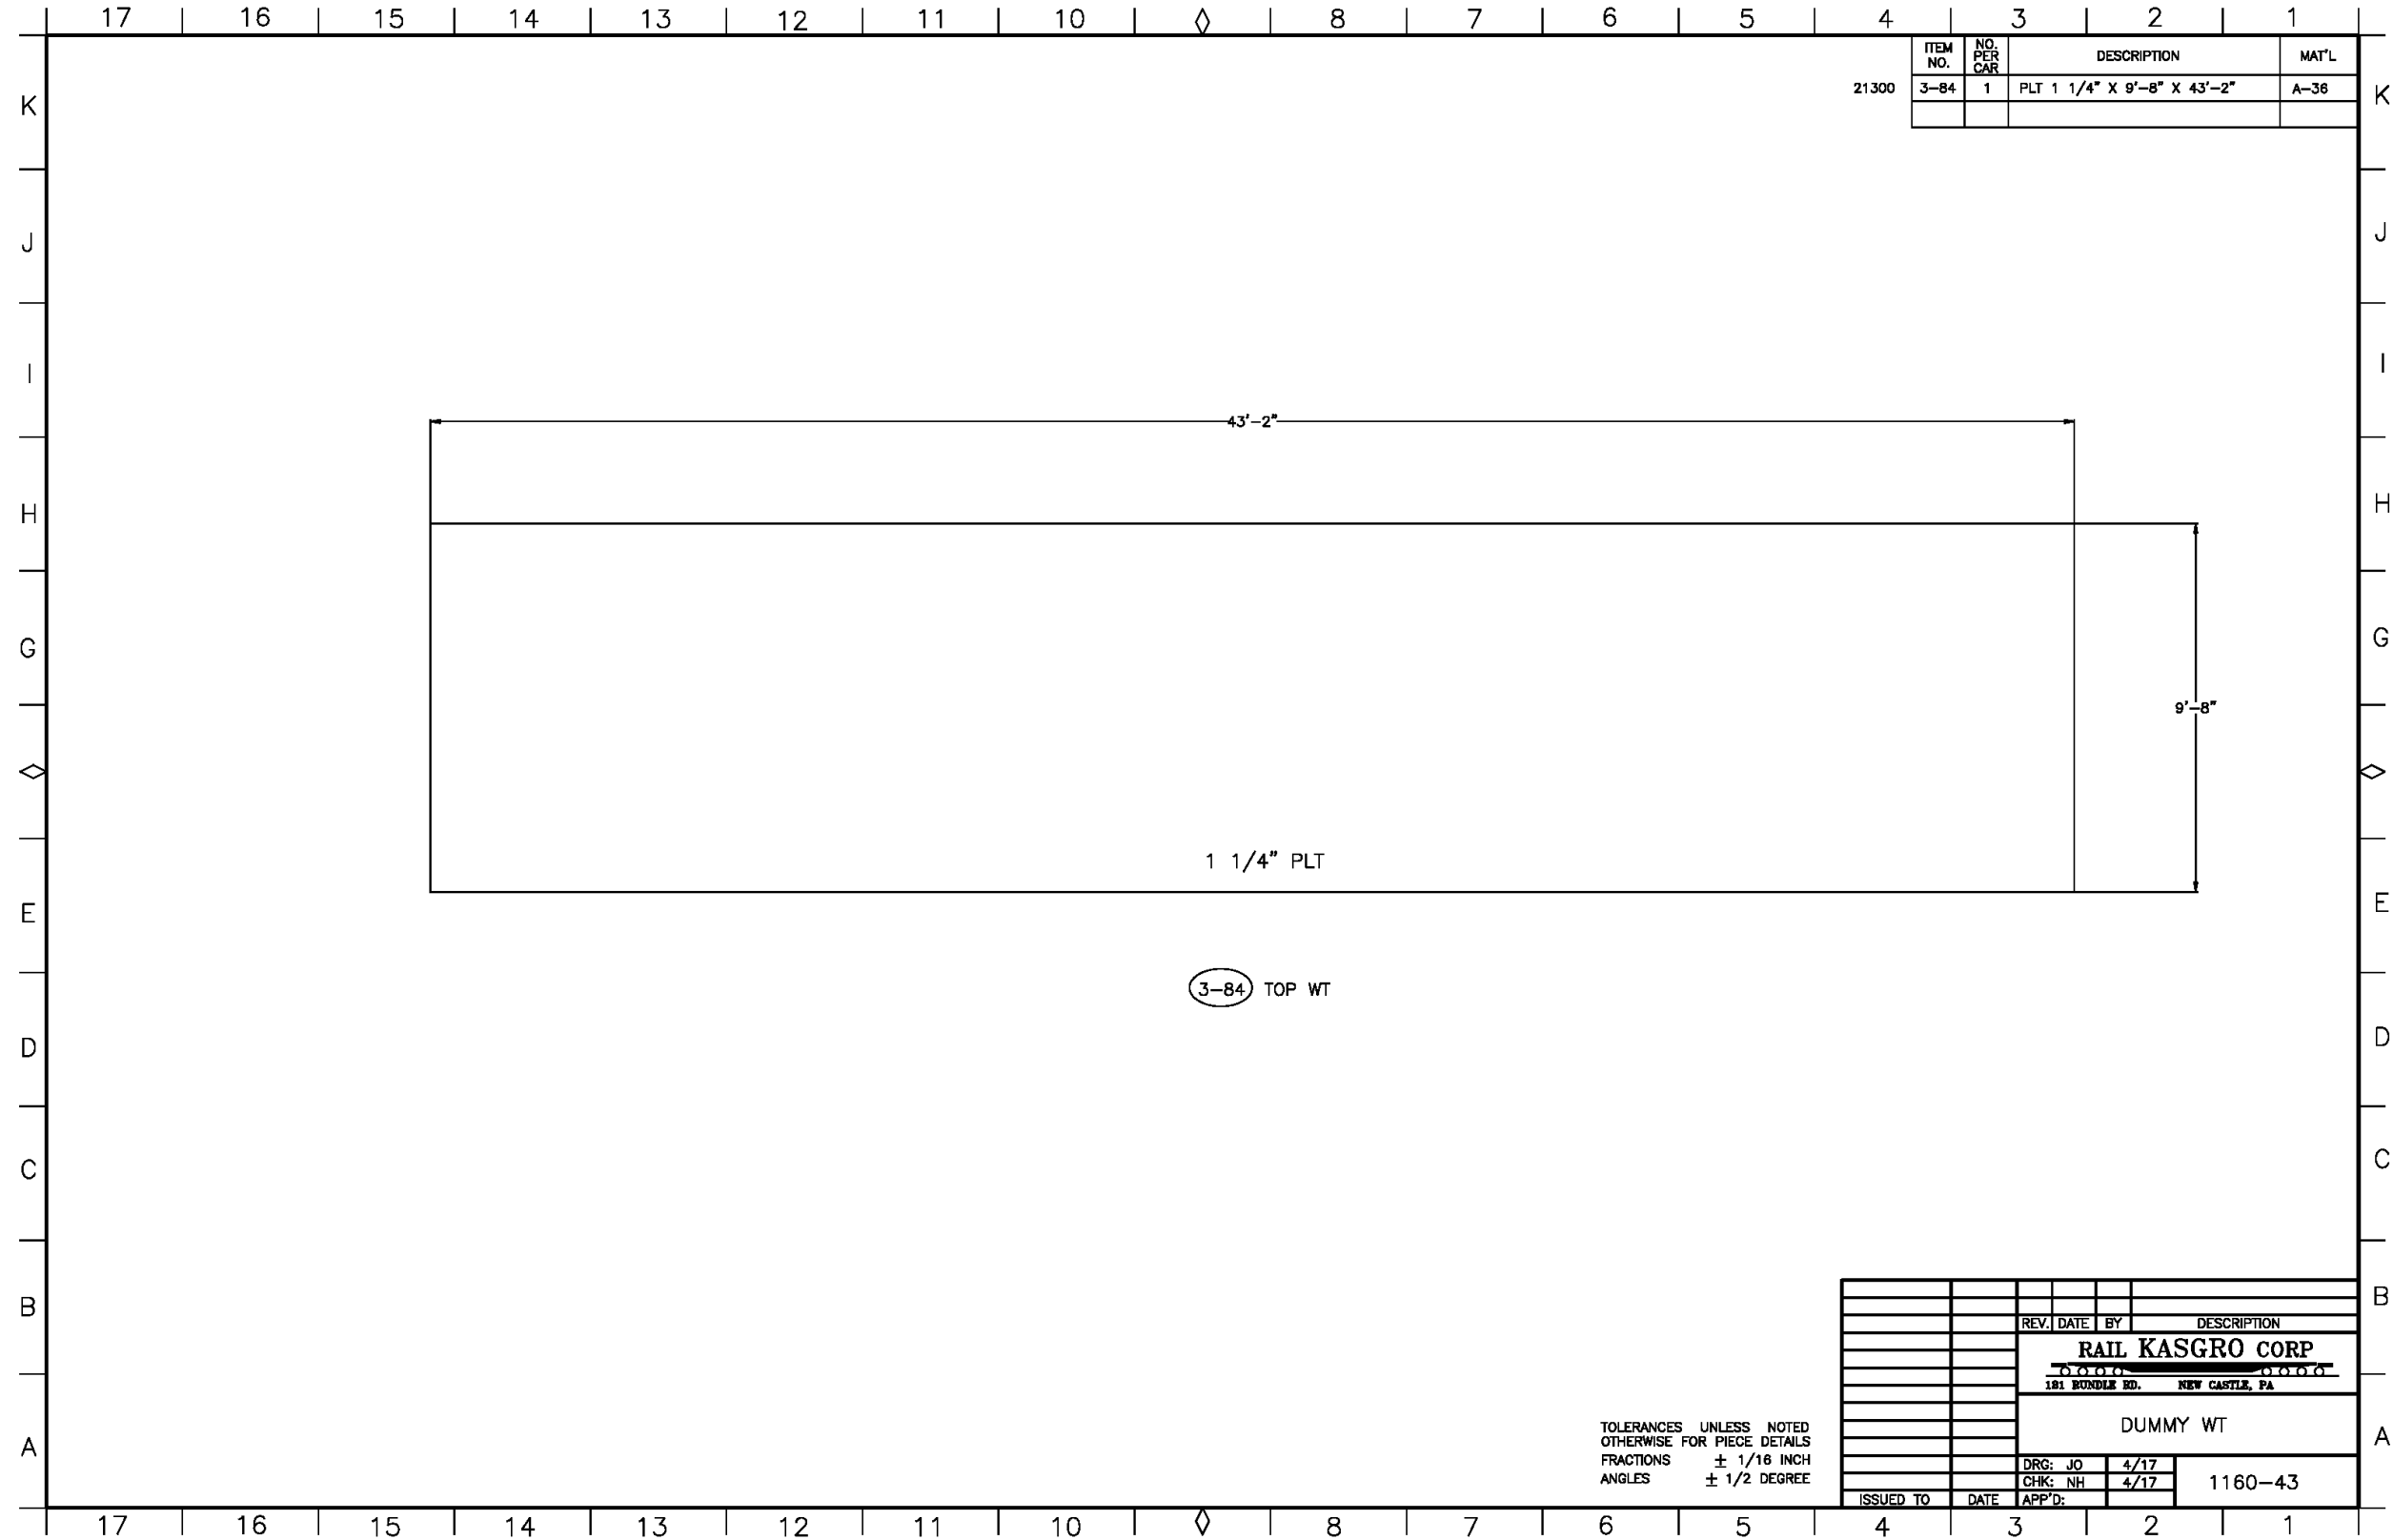

Appendix H-1.41 Locking Center Pins

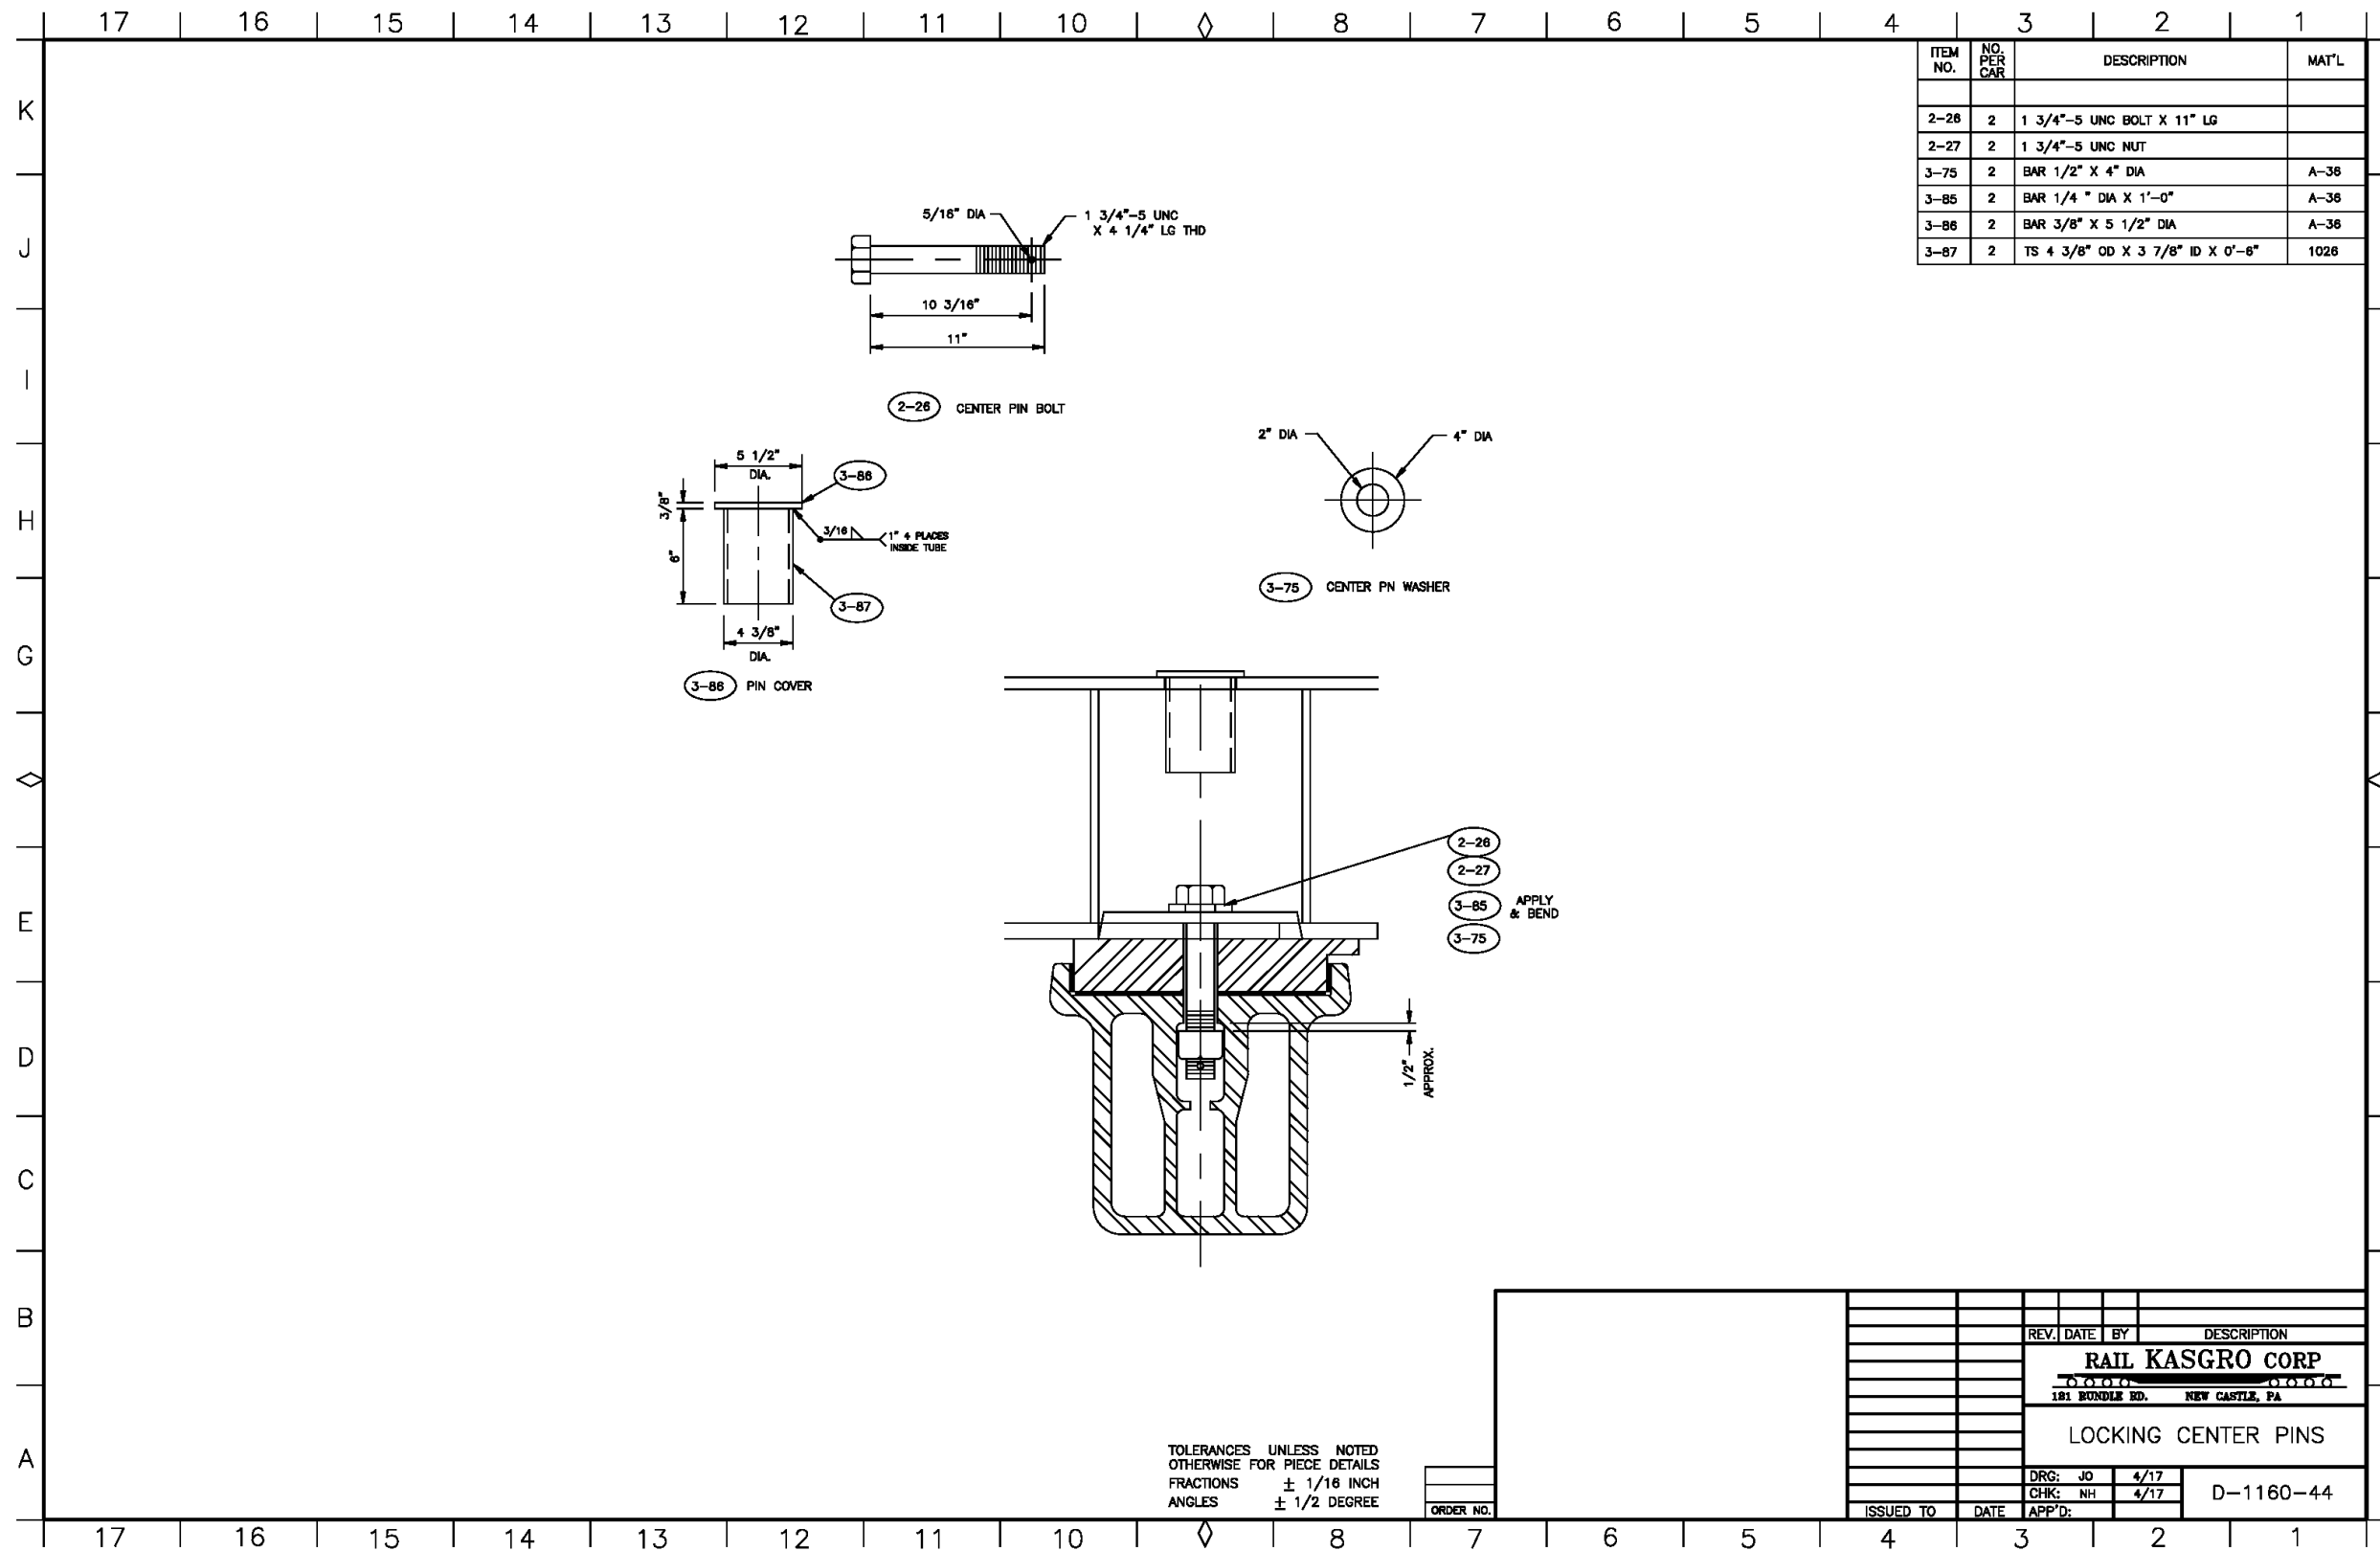

Appendix H-1.42 Steel Details

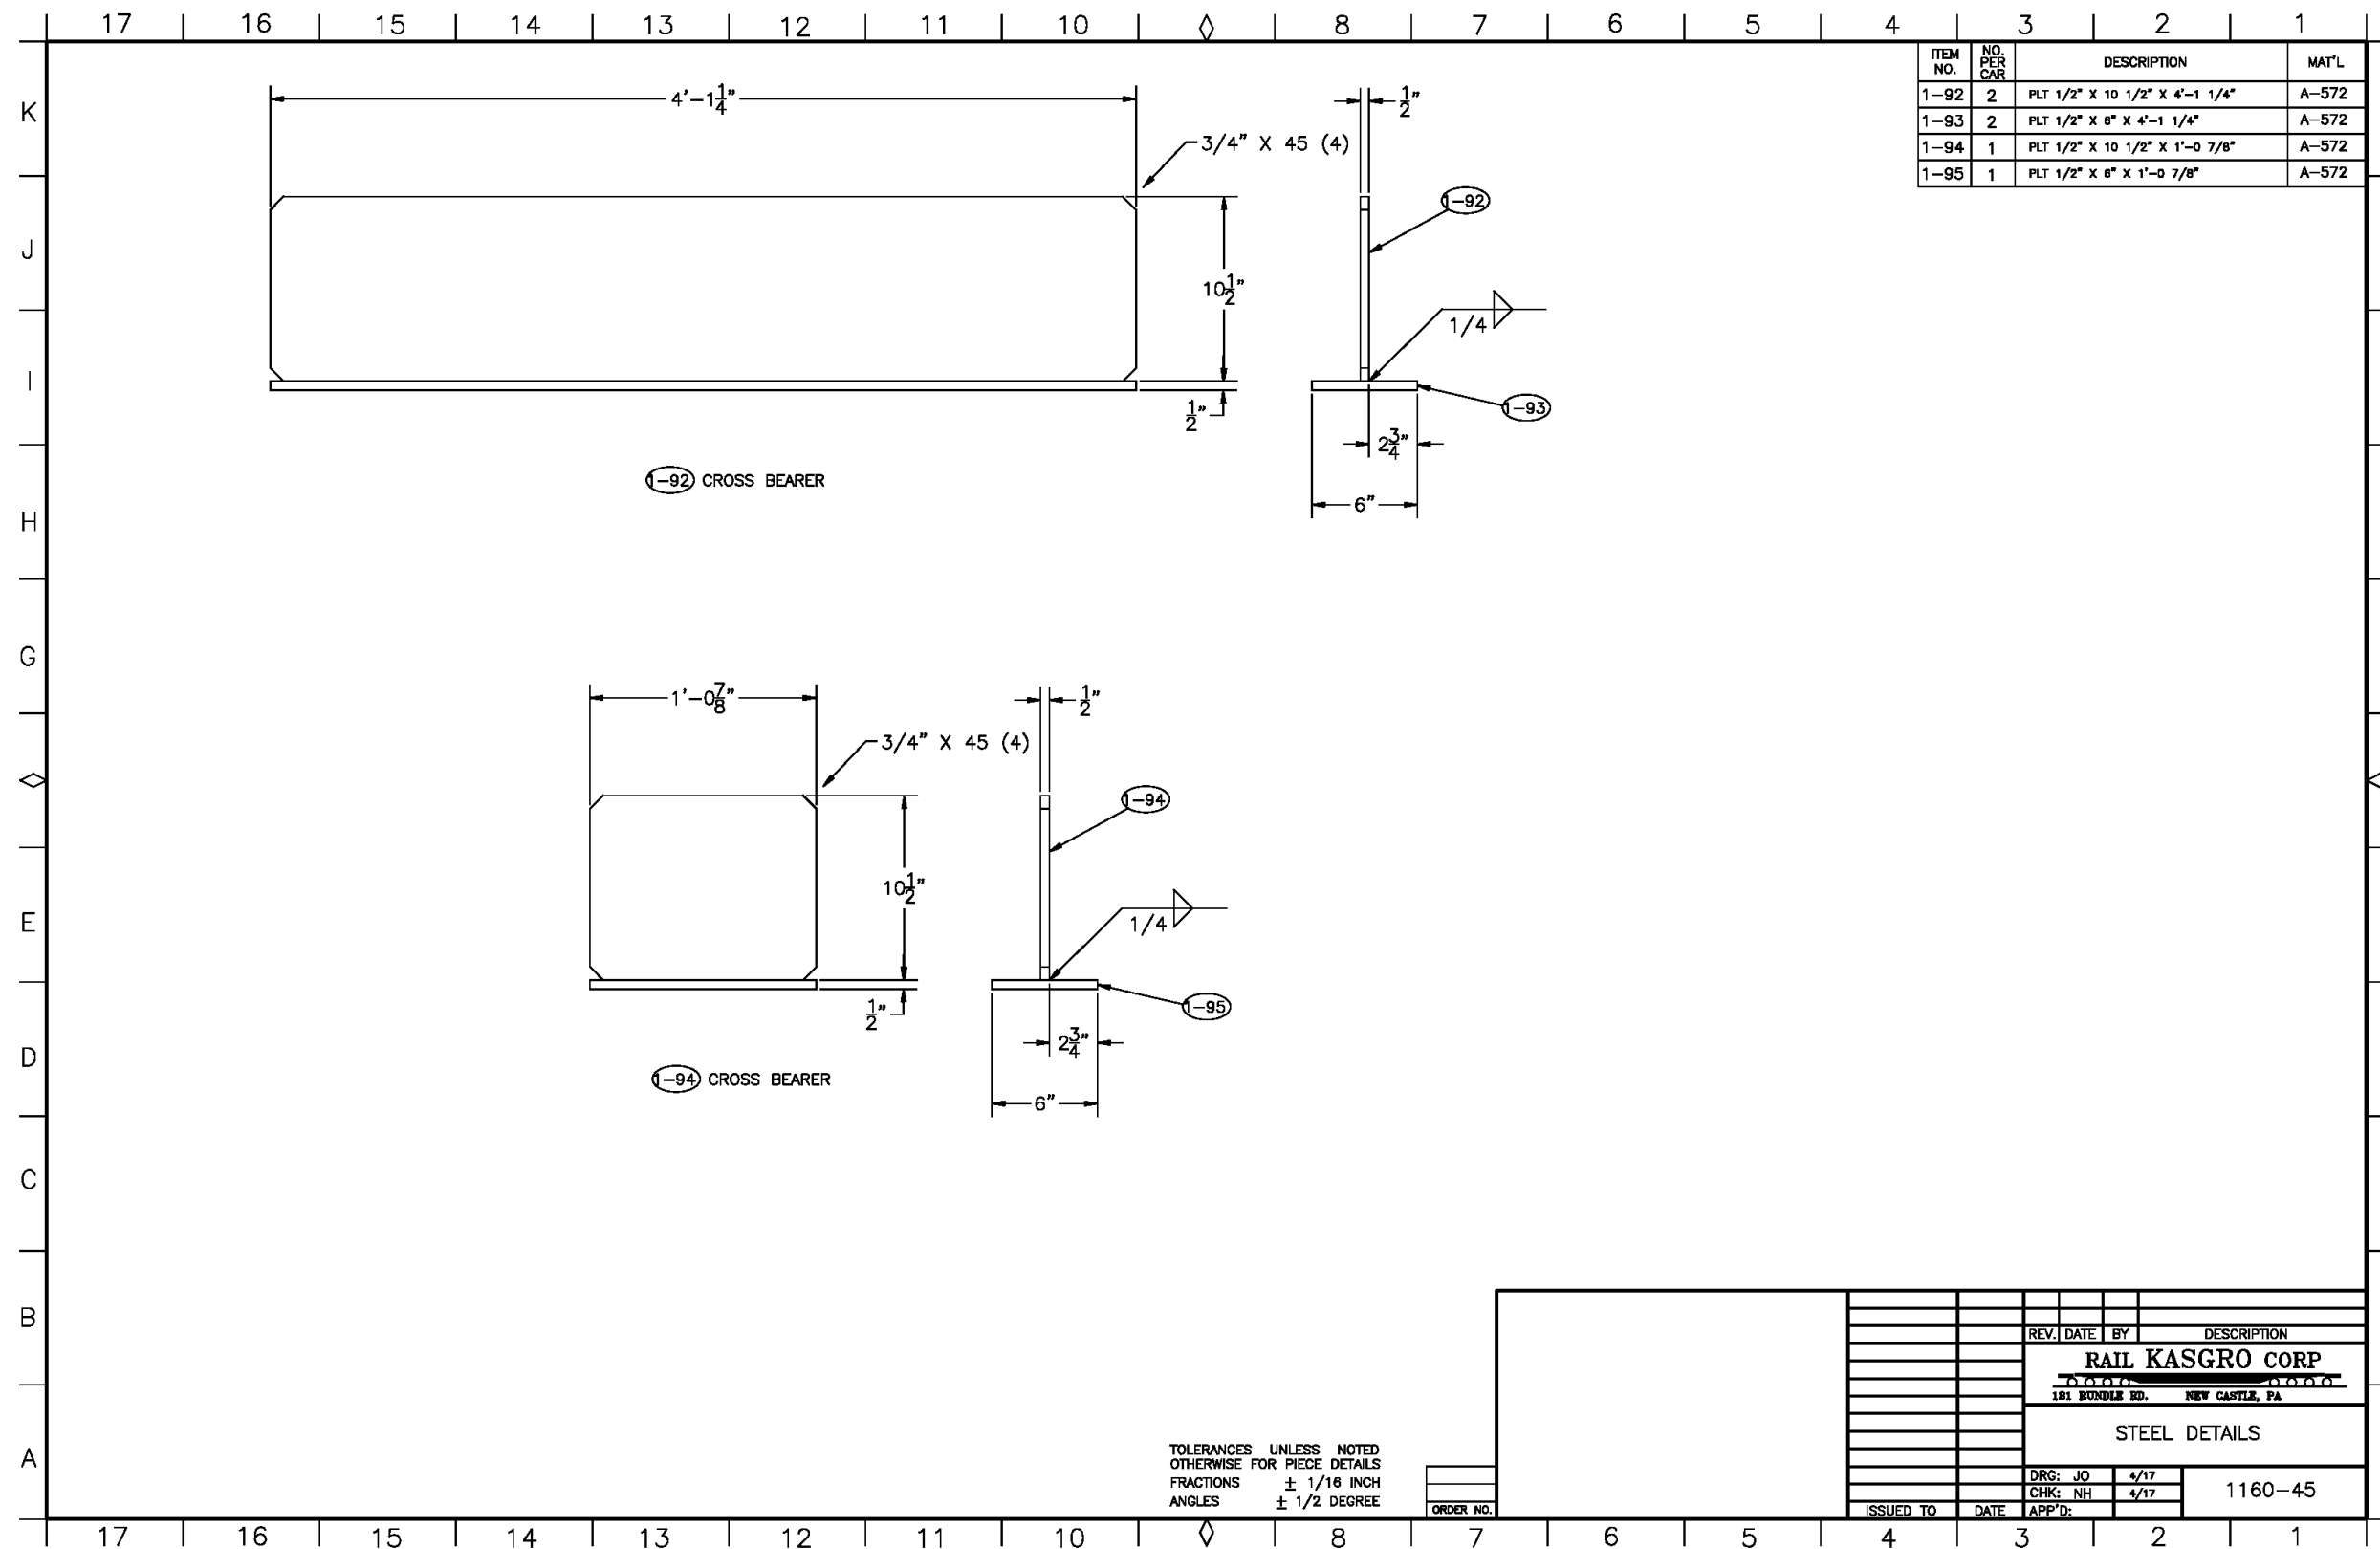

Appendix H-1.43 Atlas Buffer Railcar Structural Analysis



**ATLAS 4 AXLE FLAT CAR**

Preliminary Loading Analysis

60 FT 110-TON FLATCAR

For S-2043 Service

**October 2016**

October 2017  
November 2017

Prepared by: Jon Odden

Checked by: Nicholas Hinsch

**Table of Contents**

Summary of Maximum Stresses and Minimum Margins of Safety	3
Introduction	4
Car Body Materials	4
Weld Material	4
Car Body Sketch	5
General Loading	6
Shear and Moment Diagrams	7-10
Section Properties and Stresses and Ctr Line	11
Section Properties and Stresses Weak Axis	12
Section Properties at Transition	13
Body Bolster	14-18
Cross Bearer	19-22
Cooper Rating	23
Finite Element Analysis	24-50
Fatigue analysis	50-84

**Summary of Maximum Stresses and Minimum Margins of Safety**

Member	Classical Fea	Actual		Allowable		MS	Page	Paragraph
		$\sigma$	$\tau$	$\sigma$	$\tau$			
Deck Plate	FEA	25		50		1	27	4.1.3.2 c
Bottom Flange	Classical	47.7		50		0.05	11	4.1.3.2 c
Web Plate	Classical		8.3		29	2.5	13	4.1.3.2 c
Cross Bearer Flange	Classical	43.6		50		0.14	22	4.1.3.2 b 2
Cross Bearer Web	Classical		23		29	0.26	20	4.1.3.2 b 2
Bolster Flange	Classical	21.3		60		1.81	16	4.4.8.4
Bolster Web	Classical		12.5		34.8	1.78	18	
Jacking								
Body Boster Flange	FEA	43.9		50		0.14	45	4.1.6
Twist								
Bolster Flange	FEA	25		33.6		0.34	46	S-2043 4.1.5.5
Striker	FEA	47		50		0.06	49	4.1.5.1

Note:  
 Twist load stress limited to 56% yield  
 Shear stess allowable set at 58% yield

**INTRODUCTION**

The stress analysis was done both by the classical method and FEA. The classical method was used to size the members initially and to determine the shear stress and welding. The FEA was used to verify and refine the classical method.

The classical analysis was done using spreadsheets and hand calculations. Input data and output are self-explanatory. Appropriate AAR load factors are used.

The finite element analysis was done by modeling in AutoCAD inventor and launching the built-in FEA program in Inventor. One quarter of the car was used with symmetry to duplicate the full car body.

The car was designed as a general service flat car. The dynamic modeling showed the need for ballast weight over the entire car body. The design of this will lower the stresses because of the distribution of the weight and the addition to the cross-section of the underframe. Further, the capacity is now at 263k GRL whereas the calculations used 286 GRL.


**CAR BODY MATERIALS**

Gussets, cross-ties, and stringers	A-36
Draft sill webs through transition, bolster	A-572 Gr. 60
Balance of car	A-572 Gr. 50

Steel meets AAR Charpy V-notch requirements where applicable.

**WELD ROD MATERIAL**

All weld rod used is E70XX.

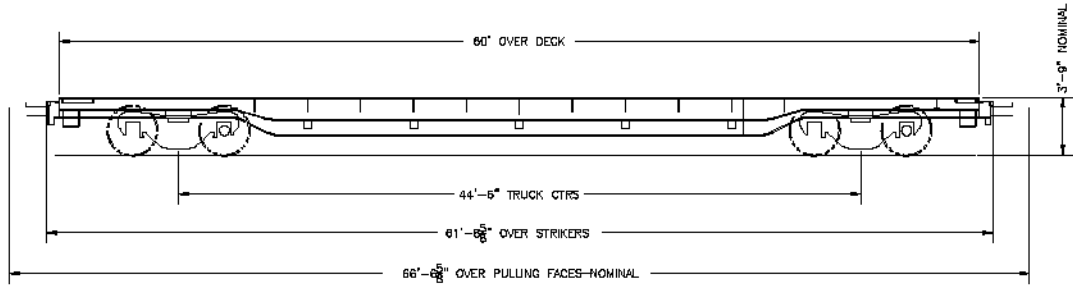

Gross Rail Load	286 k
Est Light Wt.	67
Estimated Capacity	224 k

Note: Car body designed to full capacity of trucks. It is very likely that the gross rail load and capacity will be starred and registered to keep limit the axle loading to 65.75 k/axle.

**GENERAL LOADING**

GROSS RAIL LOAD                    286,000 LBS  
 EST LIGHT WT                        62,000 LBS  
 EST LOAD LIMIT                      224,000 LBS

		Paragraph
CAR BODY DEAD LOAD	42/60 = 0.7 K/FT	
LL ON CTR 18'	224/18 = 12.44 K/FT	4.1.3.2 (c)
LL ON DECK	224/60 = 3.73 K/FT	4.1.3.2 (a)
75% LL ON CTR	.75(224) = 168 K	4.1.3.2 (b)
15% ON OVERHANG	33.6/7.75 = 4.3 K/FT	4.1.3.2 (d)

**COUPLER AND MISC LOADS AND LOAD FACTORS**

DRAFT LOAD	350 K	LF = 1.8
BUFF LOAD	-350 K	LF = 1.8
SQUEEZE	-1000 K	LF = 1.0
IMPACT	-600 K	LF = 1.0 (NOT APP. SQUEEZE LOAD MORE SEVERE)
VERT COUPLER LOAD	+/-50 K	LF = 1.0 (CUSHIONED UNDERFRAME)
	125% load	LF = 1.0

NOTE: VERTICAL COUPLER LOADS, TWIST LOAD, AND JACKING LOAD COVERED IN FEA. LIFTING LOAD SAME AS THE JACKING LOAD FOR OVERALL STRUCTURE OF THE CAR ALTHOUGH LOCAL DEFORMATION WILL OCCUR.

Paragraph 4.1.3.2 c  
**SHEAR AND MOMENT DIAGRAMS**  
 live load on ctr 18 ft


OH1= 7.75  
 TC= 44.5  
 OH2= 7.75  
 RL= 133  
 RR= 133

CONCENTRATED LOAD

P	X
SUM	0

UNIFORM LOAD


w	X1	X2
0.7	0	60
12.44	21	39

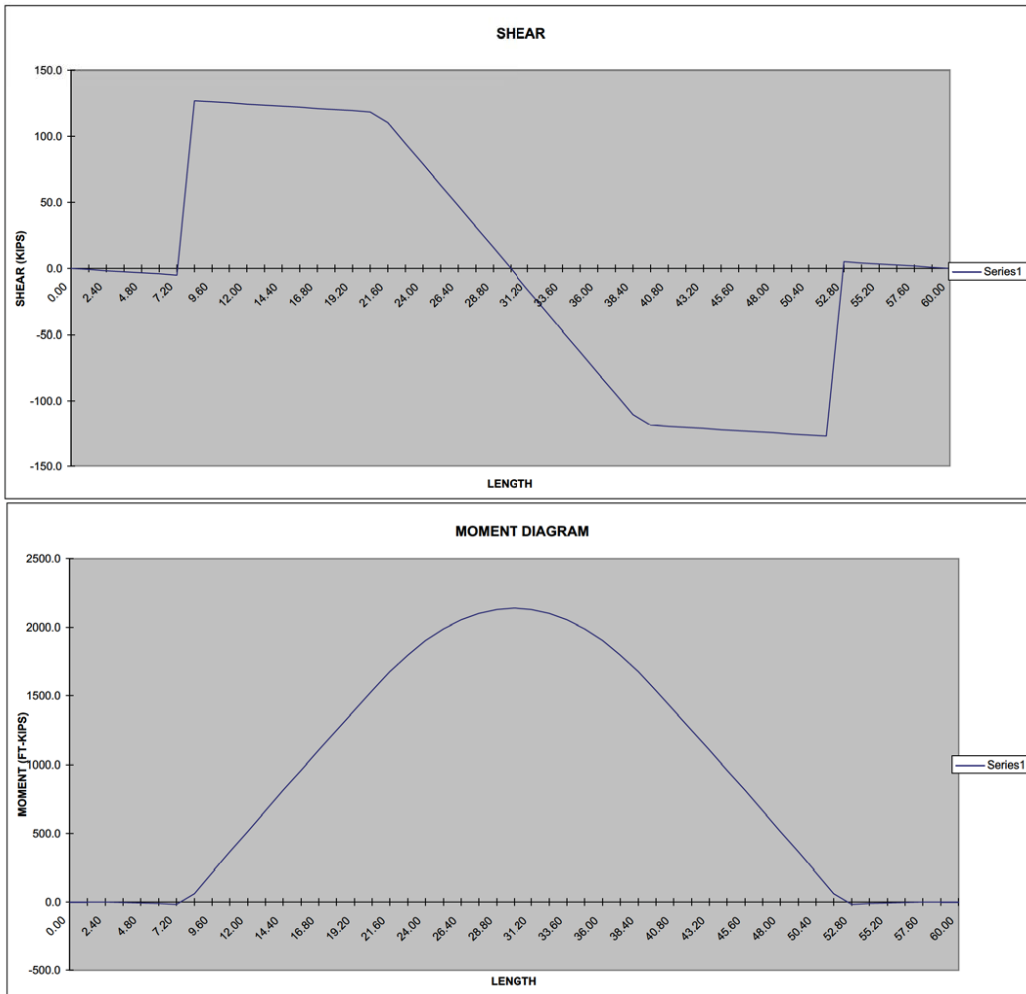

Paragraph 4.1.3.2 a  
**SHEAR AND MOMENT DIAGRAMS**  
 over full deck

OH1= 7.75  
 TC= 44.5  
 OH2= 7.75  
 RL= 134  
 RR= 134

CONCENTRATED LOAD		UNIFORM LOAD		
P	X	w	X1	X2
		0.7	0	60
		3.75	0	60
SUM		0		

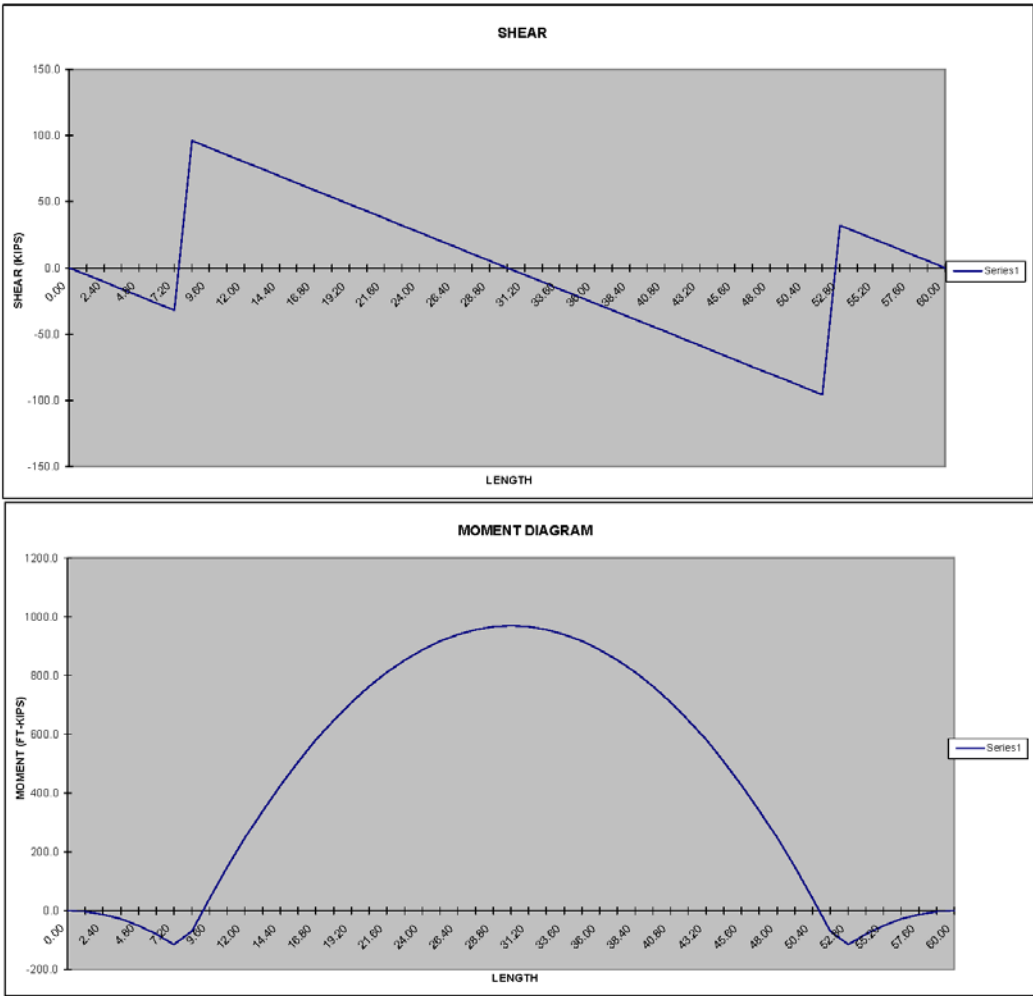

Paragraph 4.1.3.2 b

**SHEAR AND MOMENT DIAGRAMS**

75% at ctr

**CONCENTRATED LOAD**


P	X
168	30

**UNIFORM LOAD**

w	X1	X2
0.7	0	60

OH1= 7.75  
 TC= 44.5  
 OH2= 7.75  
 RL= 105  
 RR= 105

SUM 168

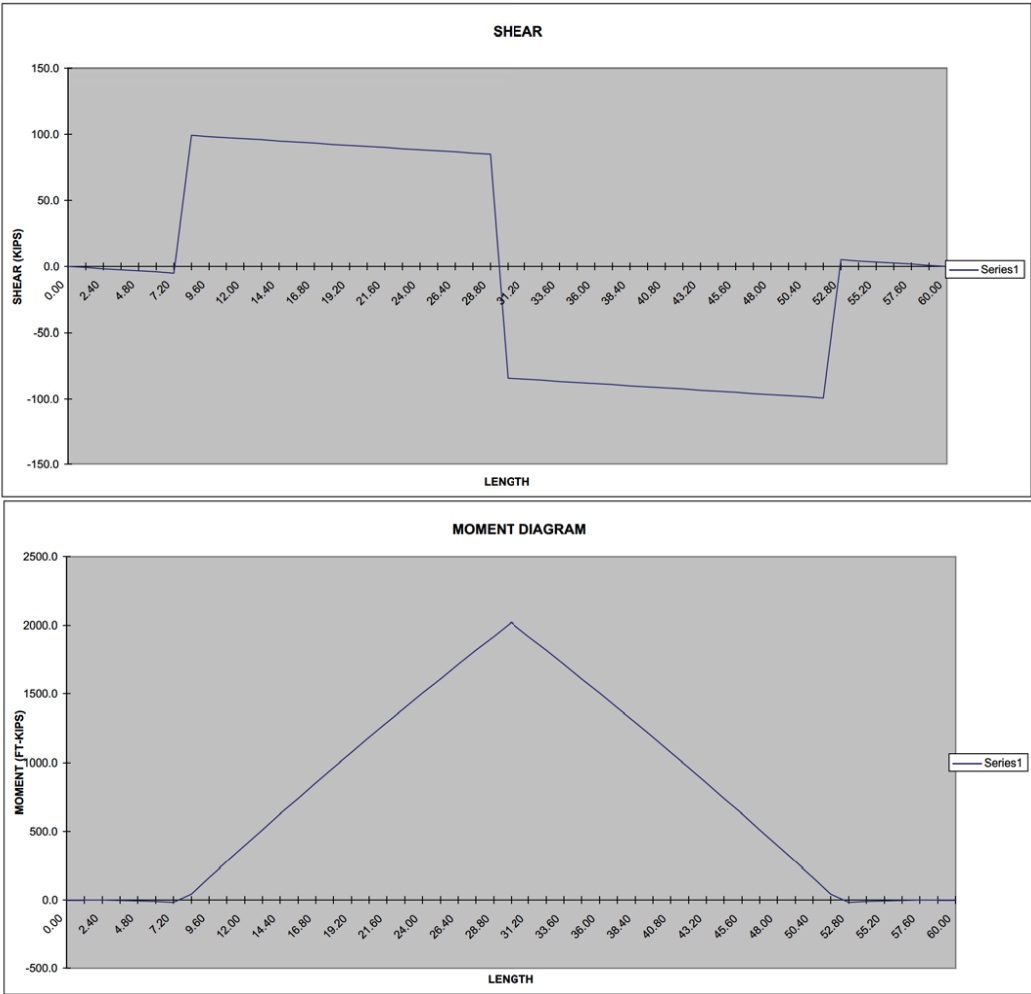

Paragraph 4.1.3.2d

SHEAR AND MOMENT DIAGRAMS


15% on oh

CONCENTRATED LOAD


P X



UNIFORM LOAD




OH1= 7.75  
 TC= 44.5  
 OH2= 7.75  
 RL= 54.3  
 RR= 54.3

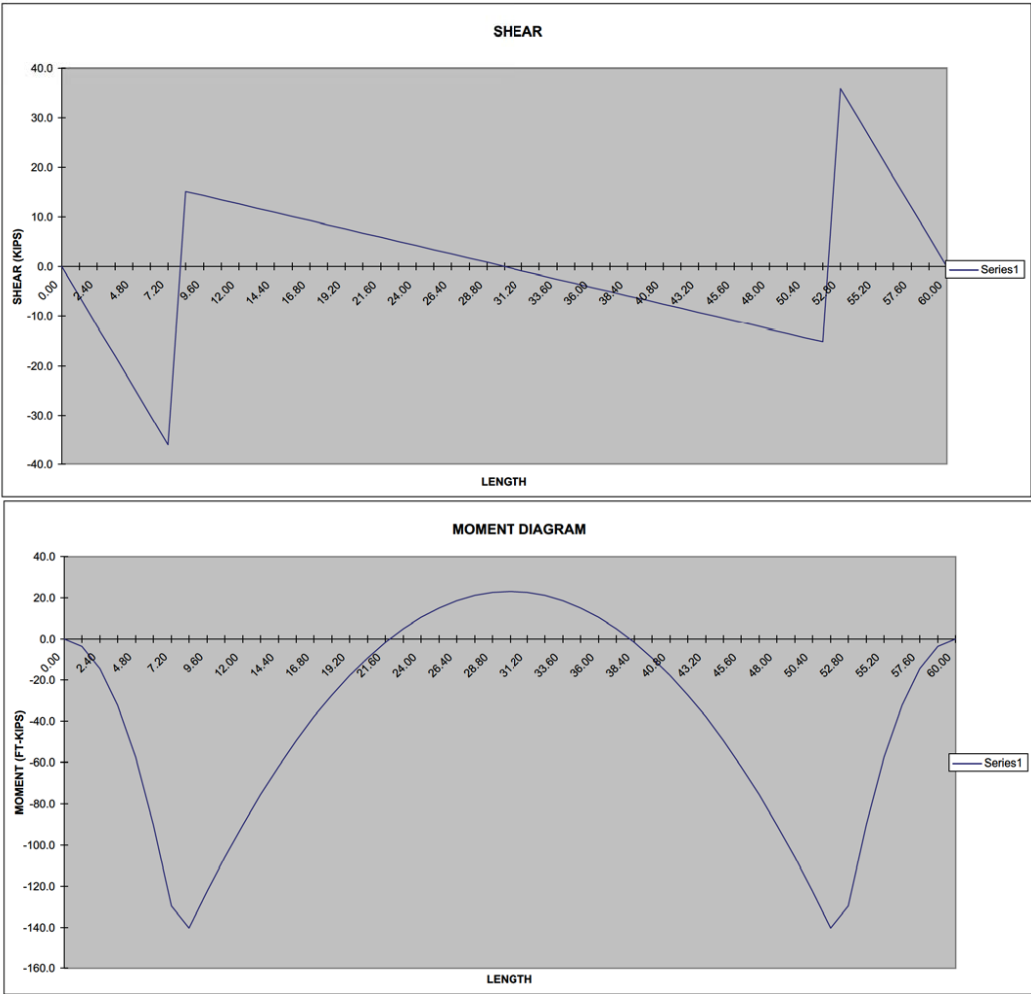

**SECTION ELEMENTS AND PROPERTIES**  
 at centerline

B	I	CG			Q-full	SHEAR FLOW
64.00	0.75	0.37	DEPTH	30.00	799.6	8.0
0.50	16.00	8.75	DECK	45.00	NA	
0.50	28.25	14.88	MOMENT	2140.00	NA	
15.00	1.00	29.50	CPLR	34.50	-624.2	-6.2
			SHEAR	127.00		
				FULL/HALF	2	
				AREA=	170.25	
				NA=	8.69	
				I=	22952.86	
				S-top=	-2639.89	
				S-bott=	1077.33	
				ECCENT=	1.81	
				Q-na=	862.76	

AXIAL LOAD	MOM	IND MOM		M/S	P/A	M/S+P/A	VQ/It
0	2140	0.0	f-top	-17.5	0.0	<b>-17.5</b>	<b>4.30</b>
			f-bot	42.9	0.0	<b>42.9</b>	
350	2140	52.7	f-top	-17.9	3.7	<b>-14.2</b>	
			f-bot	44.0	3.7	<b>47.7</b>	
-350	2140	-52.7	f-top	-17.1	-3.7	<b>-20.8</b>	
			f-bot	41.9	-3.7	<b>38.1</b>	
-1000	2140	-150.4	f-top	-9.7	-5.9	<b>-15.6</b>	
			f-bot	23.8	-5.9	<b>18.0</b>	

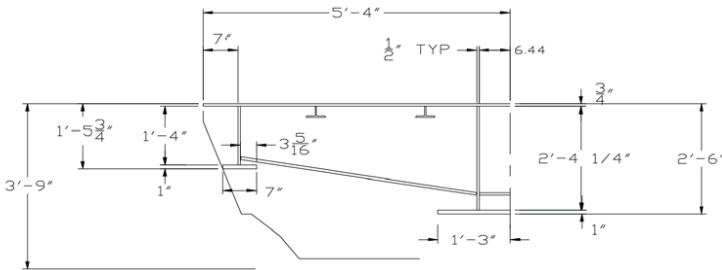

Welding

Deck to webs  $\frac{1}{4}$

good for 46 k/in

Flange to webs  $\frac{5}{16}$


good for 44.5 k/in

**SECTION ELEMENTS AND PROPERTIES**  
 at centerline weak axis

B	I	CG			Q-full	SHEAR FLOW
0.75	128.00	64.00	DEPTH	128.00	NA	
1.00	7.00	7.56	DECK	45.00	395.1	0.4
1.00	7.00	120.44	MOMENT	642.00	-395.1	-0.4
16.00	0.50	7.50	CPLR	34.50	452.0	0.4
16.00	0.50	120.50	SHEAR	127.00	-452.0	-0.4
1.00	30.00	64.00			NA	
28.50	0.50	57.31	FULL/HALF	1	95.3	0.1
28.50	0.50	70.69			-95.3	-0.1

AREA= 184.50  
 NA= 64.00  
 I= 230322.38  
 S-top= -3598.79  
 S-bott= 3598.78  
 ECCENT= -53.50  
 Q-na= 2590.86

AXIAL LOAD	MOM	IND MOM		M/S	P/A	M/S+P/A	VQ/It
0	642	0.0	f-top	-3.2	0.0	<u>-3.2</u>	<u>1.47</u>
			f-bot	3.2	0.0	<u>3.2</u>	

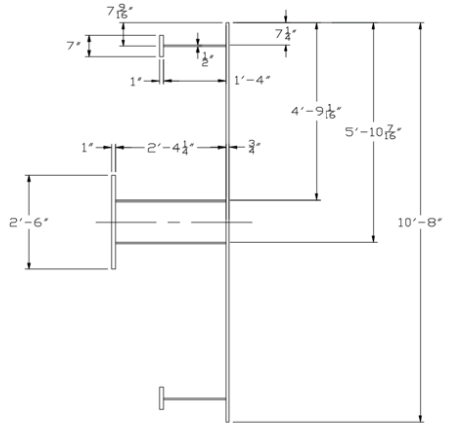

**SECTION ELEMENTS AND PROPERTIES**


at transition

B	I	CG			Q-full	SHEAR FLOW
64.00	0.75	0.37	DEPTH	16.50	400.4	16.1
0.50	8.25	4.88	DECK	45.00	NA	
0.50	14.75	8.13	MOMENT	500.00	NA	
7.00	1.00	9.50	CPLR	34.50	-69.5	-2.8
12.00	1.00	16.00	SHEAR	127.00	-275.1	-11.1


FULL/HALF 2


AREA=	157.00
NA=	4.54
I=	5682.09
S-top=	-1252.75
S-bott=	474.92
ECCENT=	5.96
Q-na=	414.72

AXIAL LOAD	MOM	IND MOM		M/S	P/A	M/S+P/A	VQ/It
0	500	0.0	f-top	-8.6	0.0	<u>-8.6</u>	<u>8.34</u>
			f-bot	22.7	0.0	<u>22.7</u>	
350	500	174.0	f-top	-11.6	4.0	<u>-7.6</u>	
			f-bot	30.7	4.0	<u>34.7</u>	
-350	500	-174.0	f-top	-5.6	-4.0	<u>-9.6</u>	
			f-bot	14.8	-4.0	<u>10.8</u>	
-1000	500	-497.0	f-top	-4.8	-6.4	<u>-11.2</u>	
			f-bot	12.6	-6.4	<u>6.3</u>	

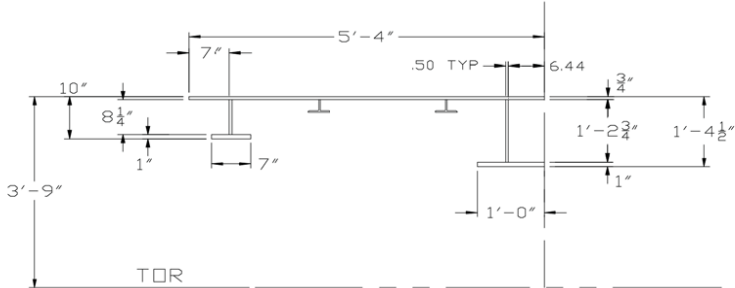


Welding

Deck to webs 1/4   
 good for 46 k/in

Flange to webs 5/16   
 good for 44.5 k/in



Body Bolster  
 Paragraph 4.4.8.4







REFERENCE	CTR SILL LOAD	EDGE OF CTR SILL	SIDE BRG LOAD
70 TON TRUCKS	230	230	144
100 TON TRUCKS	300	300	188
125 TON TRUCKS	325	325	207
2-70 TON TRUCKS	460	460	288
2-100 TON TRUCKS	600	600	376
2-125 TON TRUCKS	650	650	414

LENGTH (L2) 16 INCHES  
 LENGTH (L1) 113 INCHES  
 % CARRIED BY CENTER SILL 50 %  
 CTR PLT LOAD 300 KIPS  
 SIDE BEARING LOAD 188 KIPS

REACTIONS AND FORCES	LOAD ON CTR PLT	LOAD ON EDGE OF CTR PLT	LOAD ON SIDE BRG
F1	75.0	96.2	88.6
F2	75.0	75.0	47.0
F3	75.0	75.0	47.0
F4	75.0	53.8	5.4
R1	0.0	0.0	188.0
R2	150.0	300.0	0.0
R3	150.0	0.0	0.0

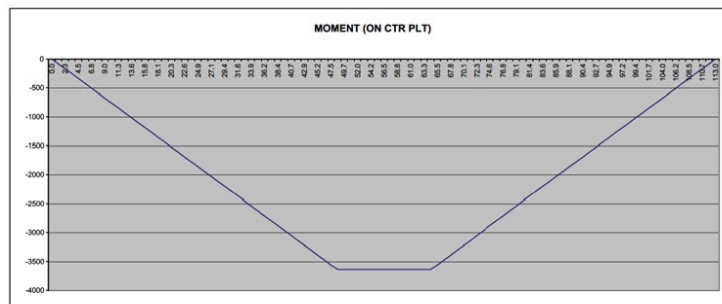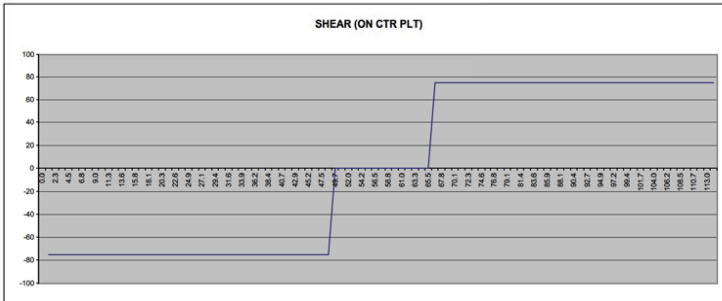

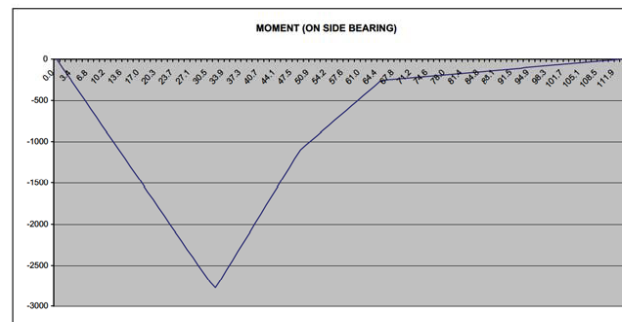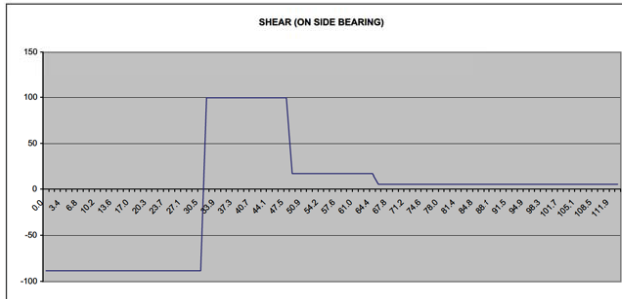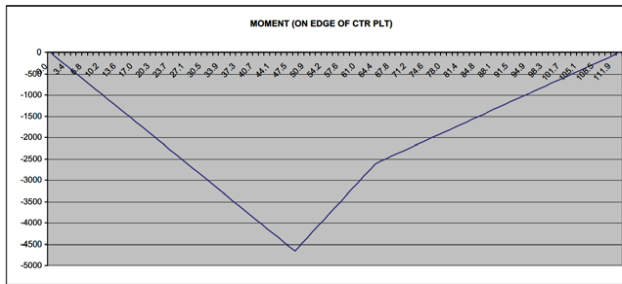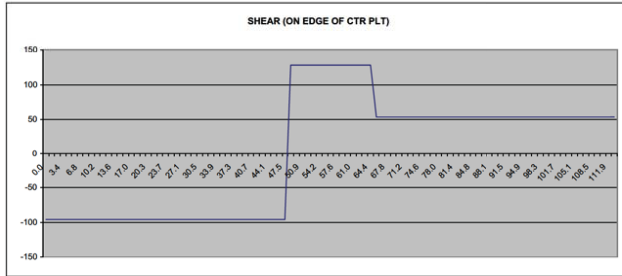

**SECTION ELEMENTS AND PROPERTIES**  
**BOLSTER AT CTR SILL**

<u>B</u>	<u>I</u>	<u>CG</u>			<u>Q-full</u>	<u>SHEAR FLOW</u>
12.00	0.75	0.38	DEPTH	16.13	120.7	7.8
0.50	14.75	8.13	DECK	51.00	NA	
10.00	0.63	15.50	MOMENT	388.00	-105.3	-6.8
			CPLR	34.00		
			SHEAR	128.00		
			FULL/HALF	2		
			AREA=	45.25		
			NA=	7.08		
			I=	1980.21		
			S-top=	-279.71		
			S-bott=	218.91		
			ECCENT=	9.92		
			Q-na=	140.71		

<u>AXIAL LOAD</u>	<u>MOM</u>	<u>IND MOM</u>		<u>M/S</u>	<u>P/A</u>	<u>M/S+P/A</u>	<u>VQ/It</u>
0	388	0.0	f-top	-16.6	0.0	<b><u>-16.6</u></b>	<b><u>9.10</u></b>
			f-bot	21.3	0.0	<b><u>21.3</u></b>	

See following page for sketch

**SECTION ELEMENTS AND PROPERTIES**  
**BOLSTER AT SIDE BEARING**

B	I	CG			Q-full	SHEAR FLOW
12.00	0.75	0.38	DEPTH	13.38	99.6	7.4
0.50	12.00	6.75	DECK	51.00	NA	
10.00	0.63	13.06	MOMENT	245.00	-89.4	-6.7
			CPLR	34.00		
			SHEAR	100.00		
			FULL/HALF	2		


AREA=	42.50
NA=	5.91
I=	1344.65
S-top=	-227.65
S-bott=	180.05
ECCENT=	11.09
Q-na=	112.86

AXIAL LOAD	MOM	IND MOM		M/S	P/A	M/S+P/A	VQ/It
0	245	0.0	f-top	-12.9	0.0	<b>-12.9</b>	<b>8.39</b>
			f-bot	16.3	0.0	<b>16.3</b>	

Welding

Deck to webs  $\frac{5}{16}$    
 good for 29 k/in

Flange to webs  $\frac{5}{16}$    
 good for 14.5 k/in



**SECTION ELEMENTS AND PROPERTIES**  
 BOLSTER AT SIDE SILL

B	I	CG			Q-full	SHEAR FLOW
12.00	0.75	0.38	DEPTH	9.00	63.8	11.9
0.50	6.63	4.56	DECK	51.00	NA	
10.00	0.63	8.69	MOMENT	181.00	-59.6	-11.1
			CPLR	34.00		
			SHEAR	100.00		

FULL/HALF 2



AREA= 37.13  
 NA= 3.92  
 I= 538.54  
 S-top= -137.34  
 S-bott= 106.03  
 ECCENT= 13.08  
 Q-na= 67.40

AXIAL LOAD	MOM	IND MOM		M/S	P/A	M/S+P/A	VQ/It
0	181	0.0	f-top	-15.8	0.0	<b>-15.8</b>	<b>12.51</b>
			f-bot	20.5	0.0	<b>20.5</b>	

Welding



Deck to webs 5/16   
 good for 29 k/in

Flange to webs 5/16   
 good for 14.5 k/in



Cross Bearer  
 37.5% on side sill

RELATIVE STIFFNESS OF SIDE SILL AND CENTER SILL

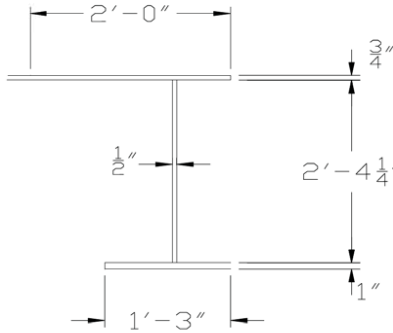

**SIDE SILL**

12	0.75	0.375
0.5	16	8.75
7	1	17.25

$I = 1300$

REL STIFF SS =  $1300/9202 = 14\%$

**CENTER SILL**

24	0.75	0.375
0.5	16	8.75
15	1	17.25

$I=7902$


REL STIFF = 86%

**SECTION ELEMENTS AND PROPERTIES**

x bearer


<u>B</u>	<u>I</u>	<u>CG</u>			<u>Q-full</u>	<u>SHEAR FLOW</u>
6.00	0.75	0.37	DEPTH	15.31	32.8	8.4
0.50	13.81	7.66	DECK	45.00	NA	
6.00	0.75	14.94	MOMENT	0.00	-32.8	-8.4
			CPLR	0.00		
			SHEAR	84.00		
			FULL/HALF	1		
			AREA=	15.91		
			NA=	7.65		
			I=	588.03		
			S-top=	-76.83		
			S-bott=	76.78		
			ECCENT=	37.35		
			Q-na=	44.71		

<u>AXIAL LOAD</u>	<u>MOM</u>	<u>IND MOM</u>		<u>M/S</u>	<u>P/A</u>	<u>M/S+P/A</u>	<u>VQ/It</u>
0	0	0.0	f-top	0.0	0.0	<u>0.0</u>	<u>22.99</u>
			f-bot	0.0	0.0	<u>0.0</u>	

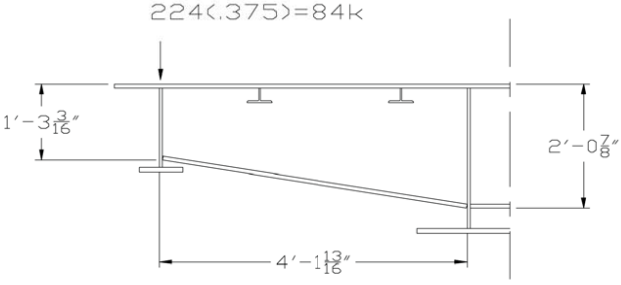



**SECTION ELEMENTS AND PROPERTIES**  
 x bearer

B	I	CG			Q-full
6.00	0.75	0.37	DEPTH	15.19	32.5
0.50	6.66	7.59	DECK	45.00	NA
6.00	0.75	14.81	MOMENT	0.00	-32.5
			CPLR	0.00	
			SHEAR	84.00	



FULL/HALF	1
AREA=	12.33
NA=	7.59
I=	482.35
S-top=	-63.55
S-bott=	63.49
ECCENT=	37.41
Q-na=	35.28


AXIAL LOAD	MOM	IND MOM		M/S	P/A	M/S+P/A	VQ/It
0	0	0.0	f-top	0.0	0.0	<u>0.0</u>	<u>22.12</u>
			f-bot	0.0	0.0	<u>0.0</u>	



**SECTION ELEMENTS AND PROPERTIES**


x bearer at ctr sill

B	I	CG			Q-full	SHEAR FLOW
6.00	0.75	0.37	DEPTH	24.88	54.3	3.8
0.50	23.38	12.44	DECK	45.00	NA	
6.00	0.75	24.50	MOMENT	299.00	-54.3	-3.8
			CPLR	0.00		
			SHEAR	72.00		



FULL/HALF	1
AREA=	20.69
NA=	12.44
I=	1843.20
S-top=	-148.22
S-bott=	148.17
ECCENT=	32.56
Q-na=	88.45

AXIAL LOAD	MOM	IND MOM		M/S	P/A	M/S+P/A	VQ/It
0	299	0.0	f-top	-43.6	0.0	<b>-43.6</b>	<b>12.44</b>
			f-bot	43.6	0.0	<b>43.6</b>	



**COOPER RATING**  
**KASGRO RAIL CORP**  
 DOE Buffer Car

LOAD	AXLE SPACING
71.5	6
71.5	38.5
71.5	6
71.5	0

SPAN FT	BENDING		END SHEAR		FLOOR BEAM REACTION	
	FT-KIPS	E	KIPS	E	KIPS	E
6	107	71.5	71	60.6	72	53.6
8	143	71.5	88	63.7	89	51.1
10	179	63.5	100	66.6	100	50.1
12	241	60.3	106	60.4	107	46.0
13	275	57.9	110	59.4	110	44.7
14	309	56.2	111	57.6	112	43.1
15	343	54.9	112	56.1	114	41.9
16	377	53.9	116	54.5	116	40.9
18	447	52.6	118	50.5	119	39.3
20	517	50.1	120	47.9	122	37.1
25	692	45.4	126	44.2	126	33.3
30	869	42.3	129	40.8	129	29.8
35	1046	40.0	129	37.4	131	26.8
40	1224	37.3	132	34.9	135	24.9
45	1401	35.0	134	32.7	145	24.3
50	1579	33.4	141	32.3	159	24.6
60	1936	29.9	164	33.3	180	23.4
70	2292	26.9	182	33.0	195	22.0
80	2869	26.5	194	31.3	206	20.7
90	3548	26.5	206	29.9	215	19.6
100	4233	26.2	212	28.2	222	18.7
110	4924	24.6	220	27.3	228	17.9
120	5619	24.4	224	25.8	233	17.0
130	6317	23.2	230	24.9	237	16.3
140	7017	22.6	233	23.6	241	15.6
150	7720	22.1	237	23.0	244	15.0
160	8424	21.1	241	22.0	246	14.3
170	9129	20.4	243	21.3	249	13.7
180	9835	19.9	246	20.4	251	13.1
200	11251	18.9	249	19.0	254	12.1
225	13024	17.8	253	17.6	258	11.0
250	14799	16.8	256	16.3	261	10.1
275	16577	15.8	258	15.2	263	9.3
300	18356	15.0	262	14.3	265	8.6
350	21919	13.4	264	12.7	268	7.5
400	25484	12.1	267	11.4	270	6.7

**FINITE ELEMENT ANALYSIS**



The car body was modeled in Inventor 2017. The built-in FEA was used in analysis. One quarter of the car was with symmetry was used for all of the loadings except the twist load where a full car model was used.

Results of the live load distributed over the center 18 feet was the governing criteria. All load cases are shown for reference.



LOADING	PARA.	PAGE
LL CTR 18 FT	4.1.3.2 c	
STATIC		25
DRAFT		26
BUFF		27
SQUEEZE		28
LL FULL CAR	4.1.3.2 a	
STATIC		29
DRAFT		30
BUFF		31
SQUEEZE		32
LL 15% ON OVERHANG	4.1.3.2 d	
STATIC		33
DRAFT		34
BUFF		35
SQUEEZE		36
LL 75% ON CTR SILL	4.1.3.2 b 1	
STATIC		37
DRAFT		38
BUFF		39
SQUEEZE		40
LL 37.5 % ON SIDE SILL	4.1.3.2 b 2	
STATIC		41
DRAFT		42
BUFF		43
SQUEEZE		44
JACKING LOAD	4.1.6	45
TWIST LOAD S-2043	4.1.5.5	46-47
VERTICAL COUPLER	4.1.5	48-49
DEFLECTION		50

Some loads and supports were entered into the model as point loads. This causes a resulting high stress at the point of application. The point loads were necessary to maintain integrity in the model. High point stresses were ignored in the overall stress summary.



Load over 18 feet static  
Paragraph 4.1.3.2 c

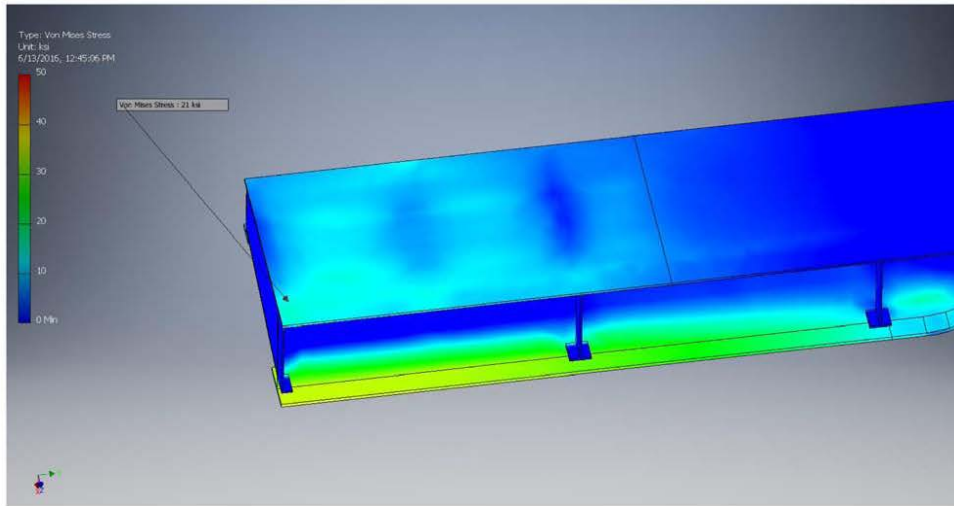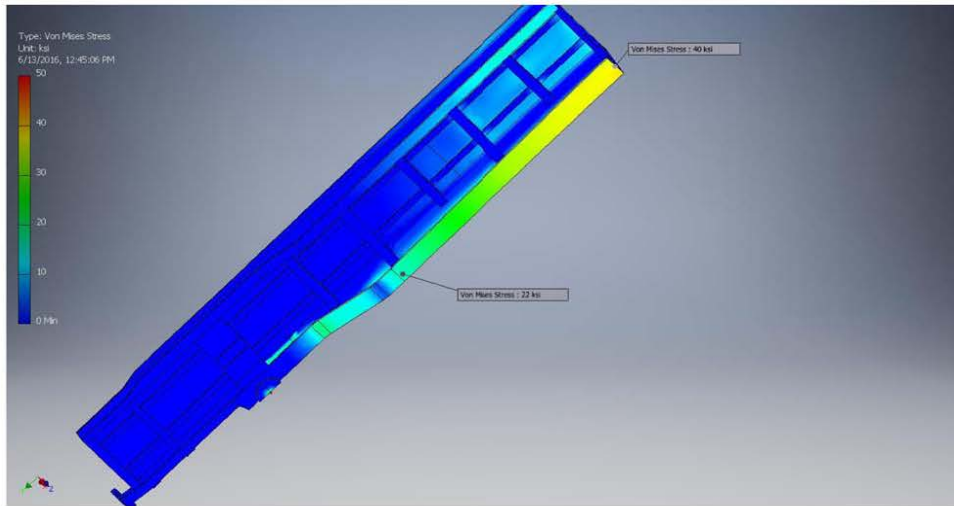



18 feet with draft  
Paragraph 4.1.3.2 c

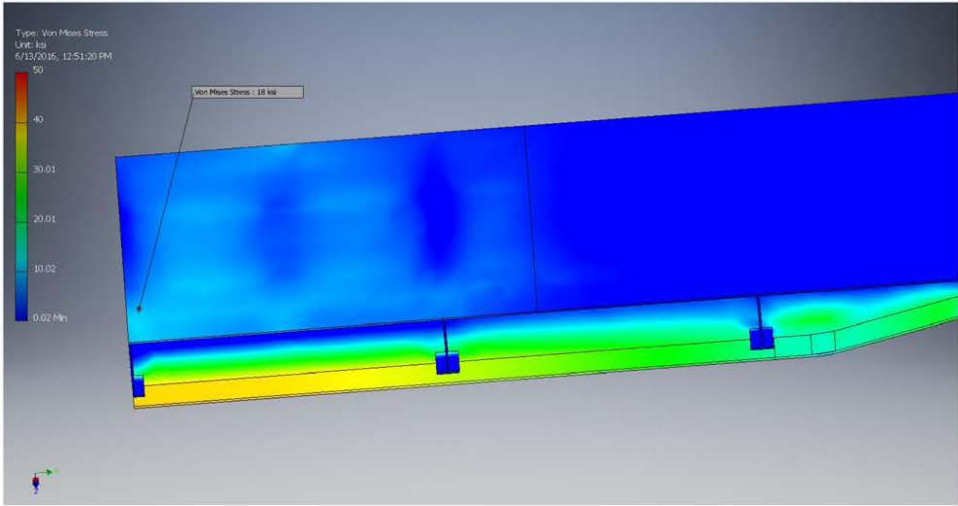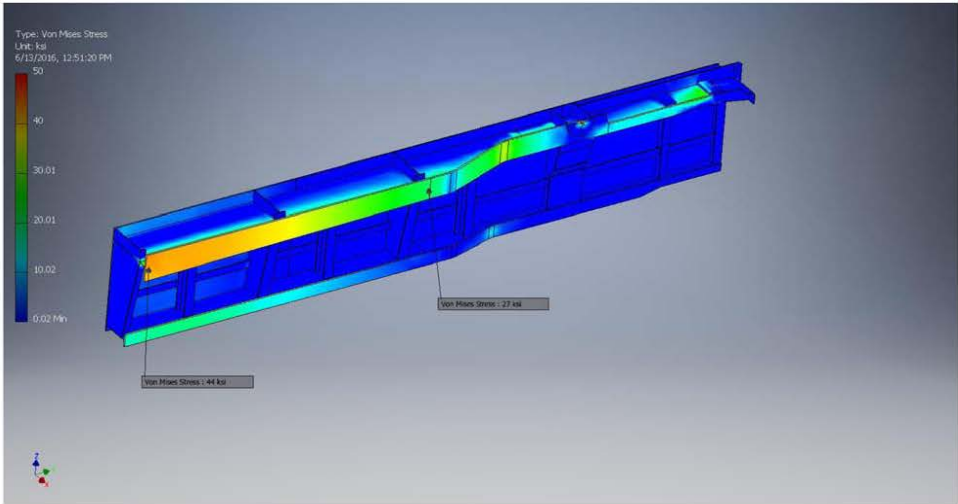



Paragraph 4.1.3.2 c  
18 feet with buff

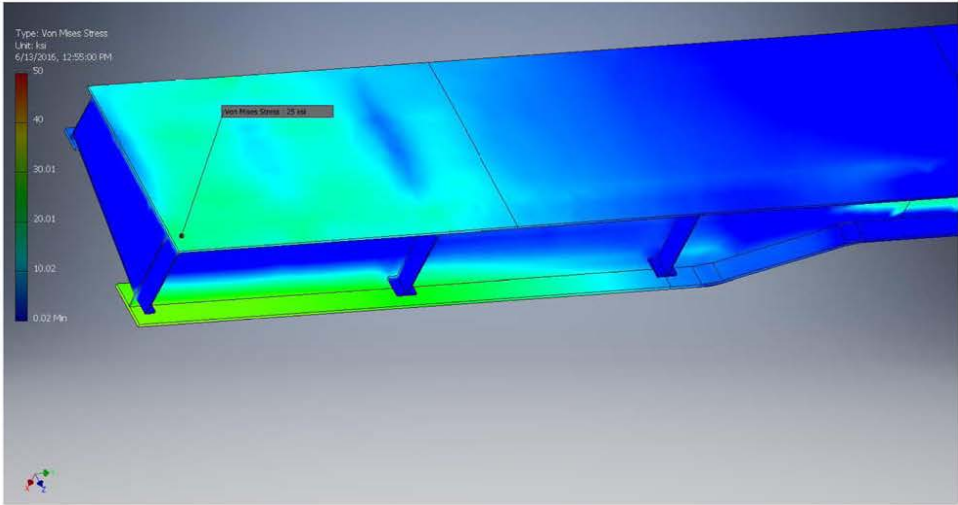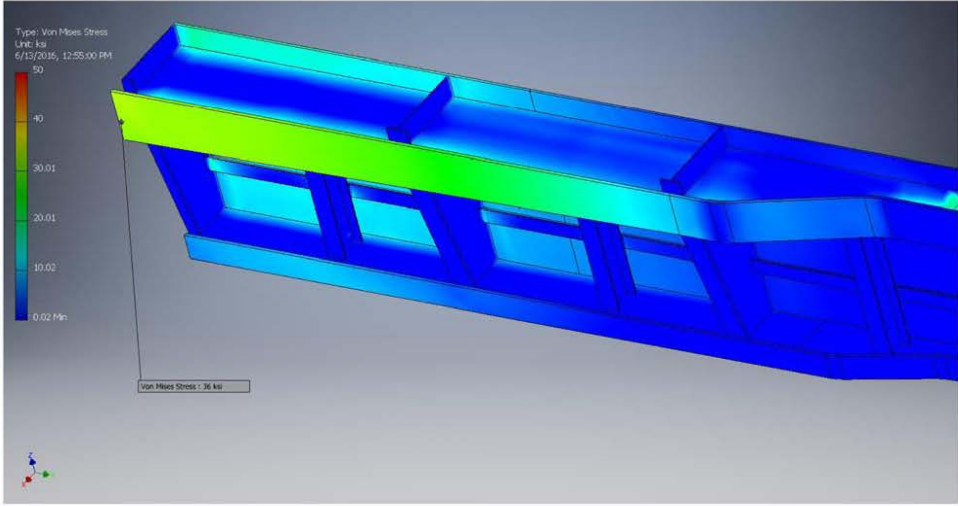



18 feet squeeze  
Paragraph 4.1.3.2 c

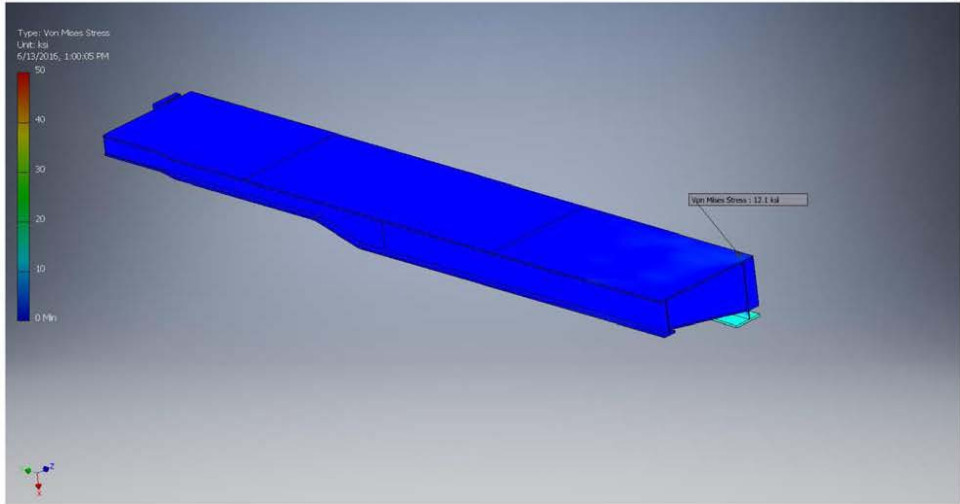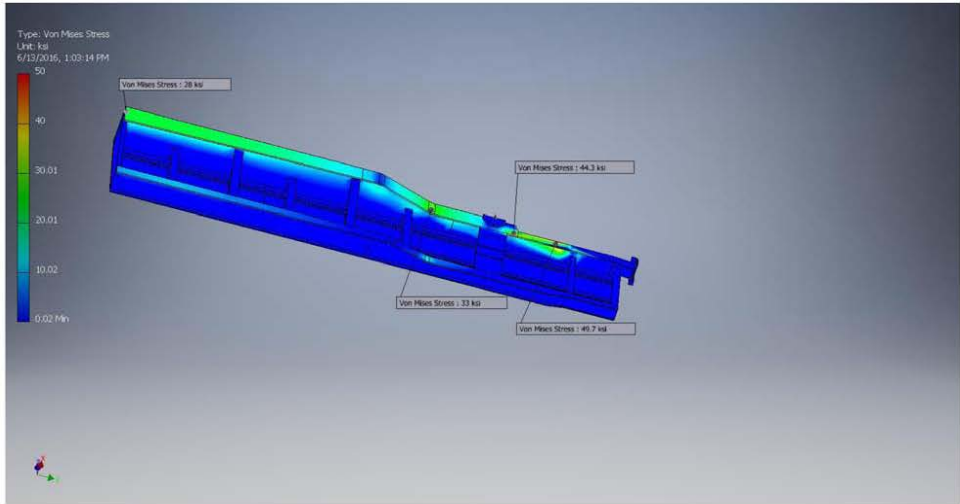



Load over full car static  
Paragraph 4.1.3.2 a

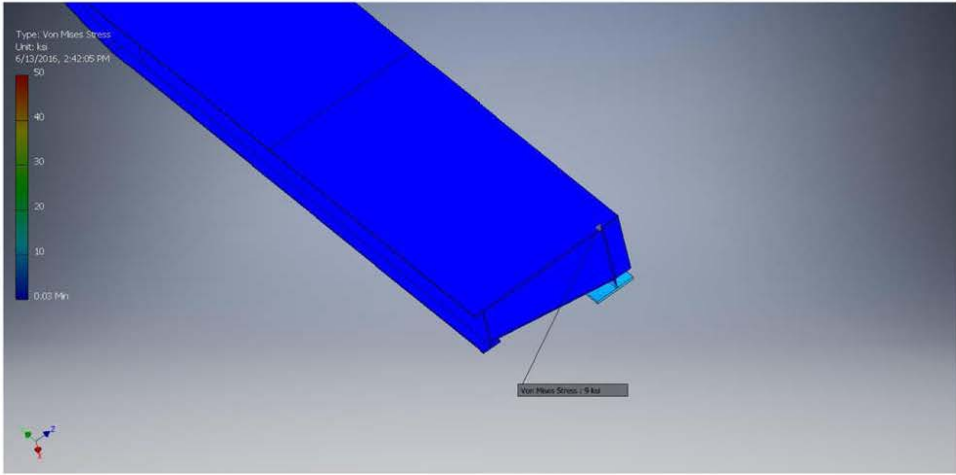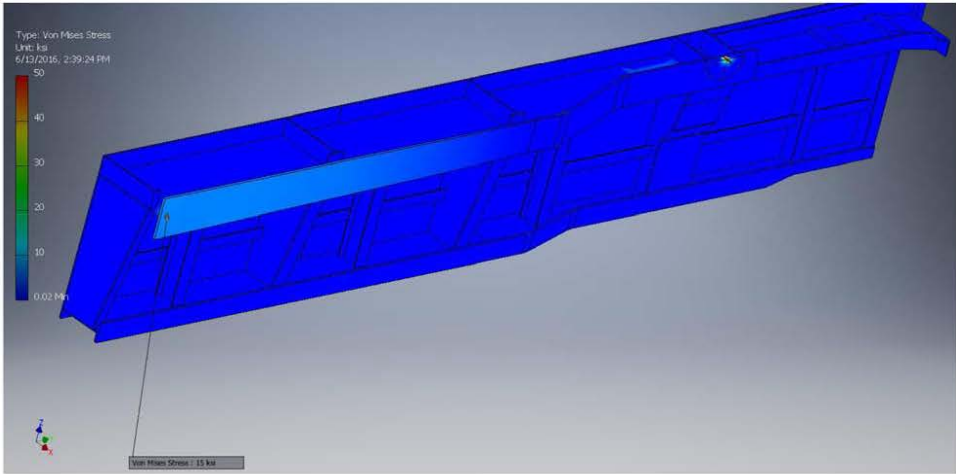



Over deck draft  
Paragraph 4.1.3.2 a

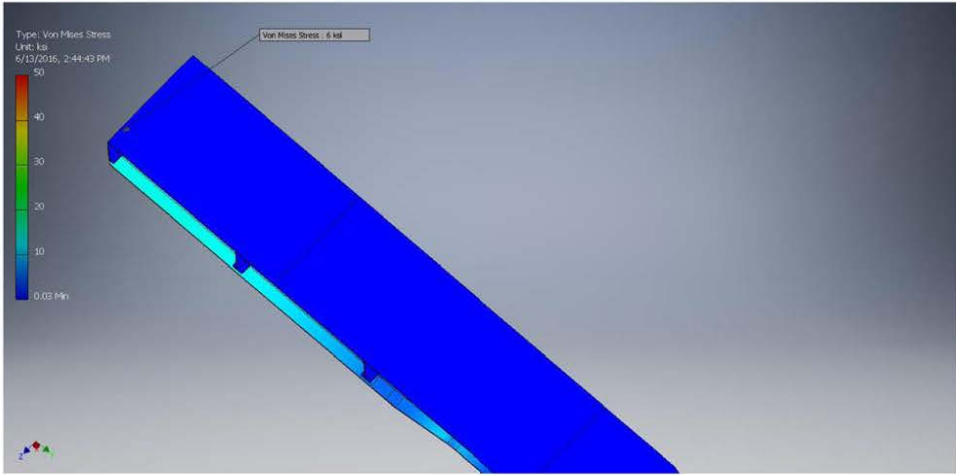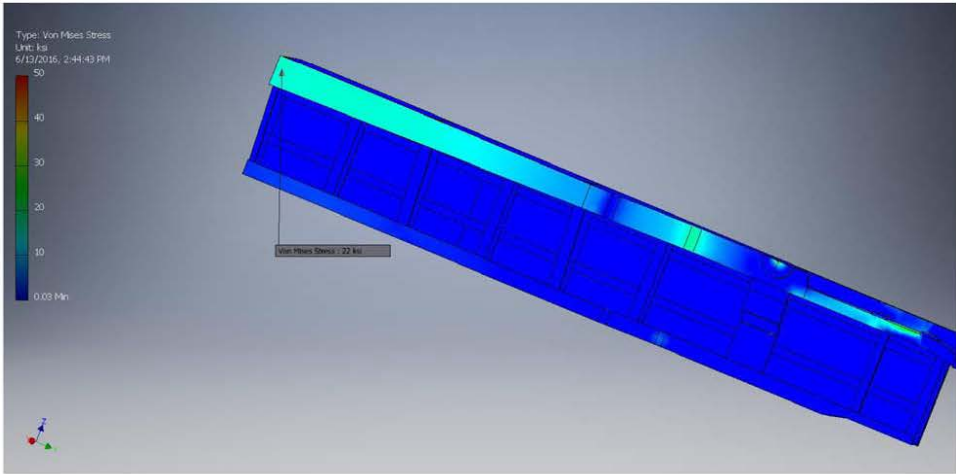



Over deck with buff  
Paragraph 4.1.3.2 a

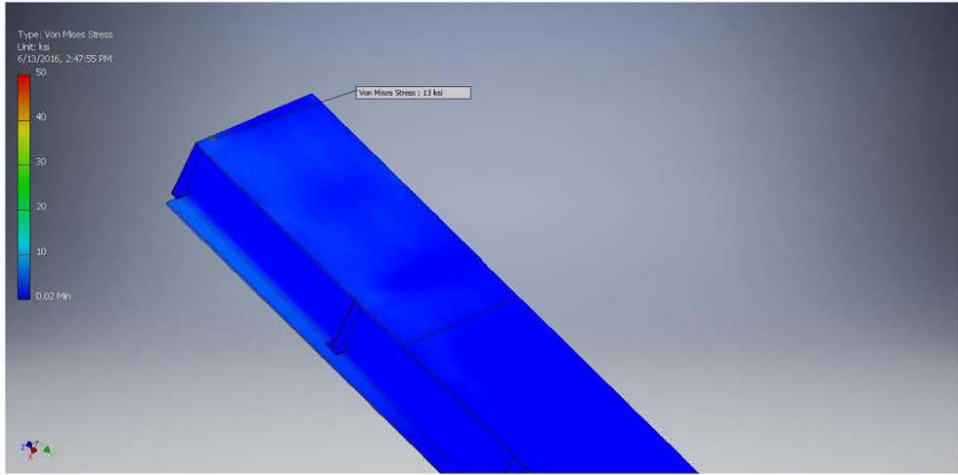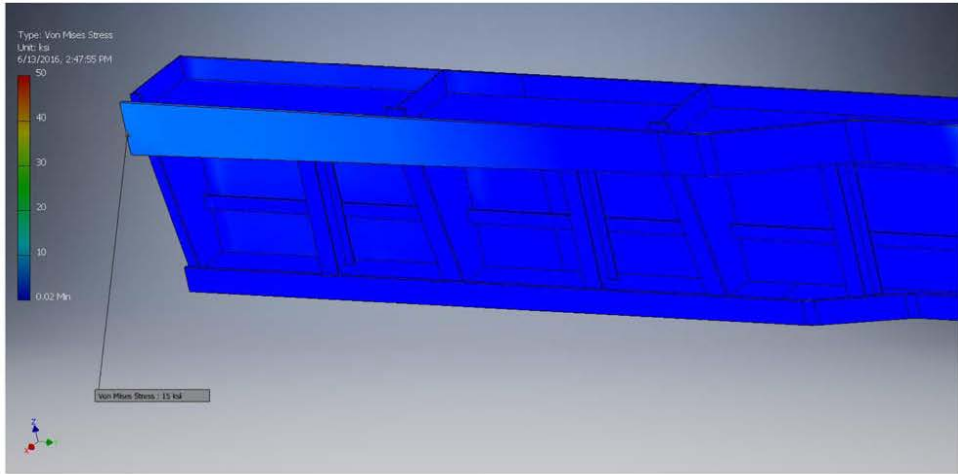



Paragraph 4.1.3.2 a  
Over deck squeeze

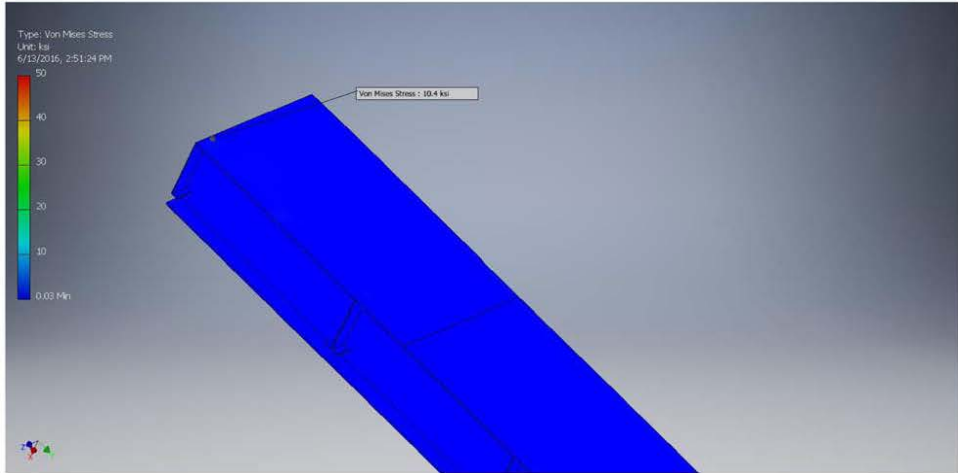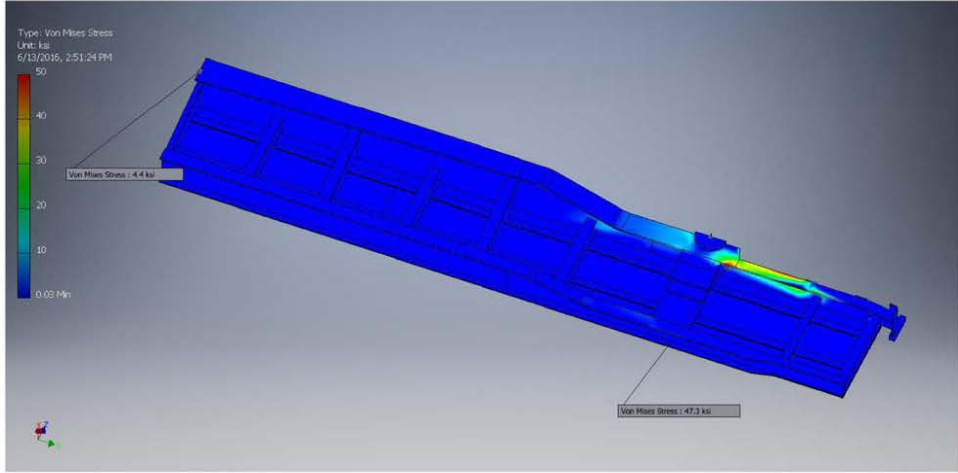



Paragraph 4.1.3.2 d  
15 percent on overhang static

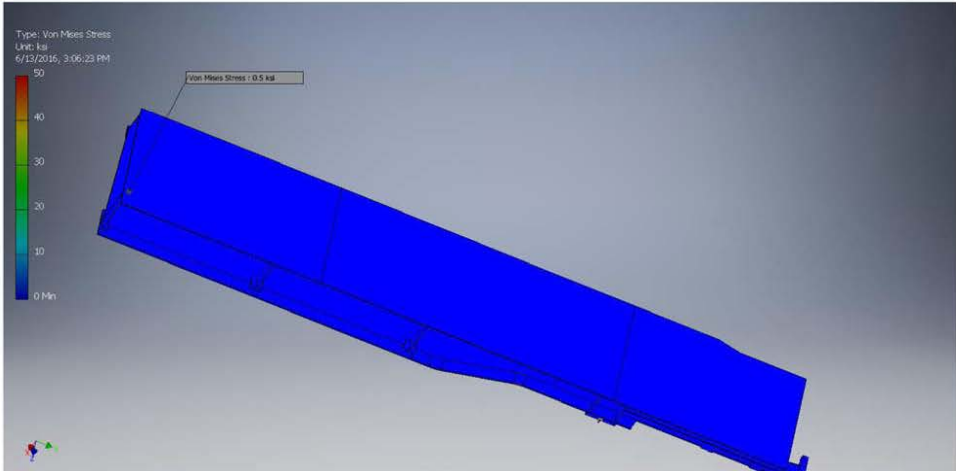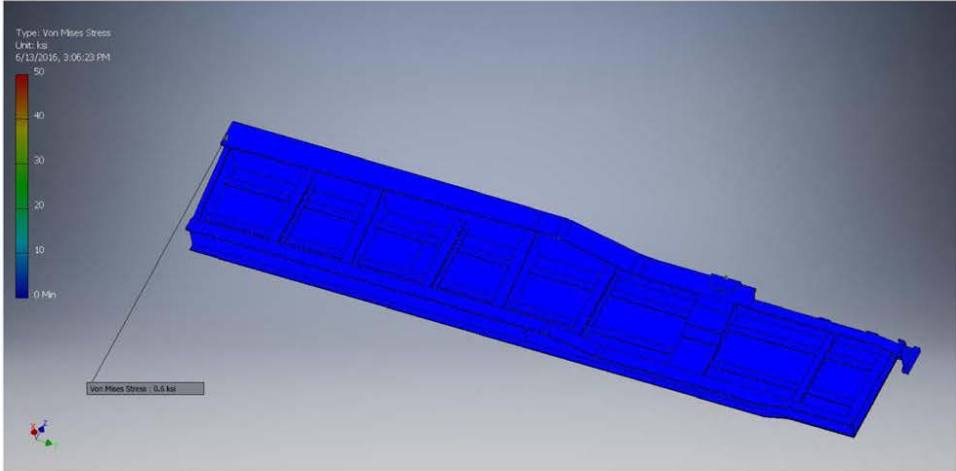



Overhang with draft  
Paragraph 4.1.3.2 d

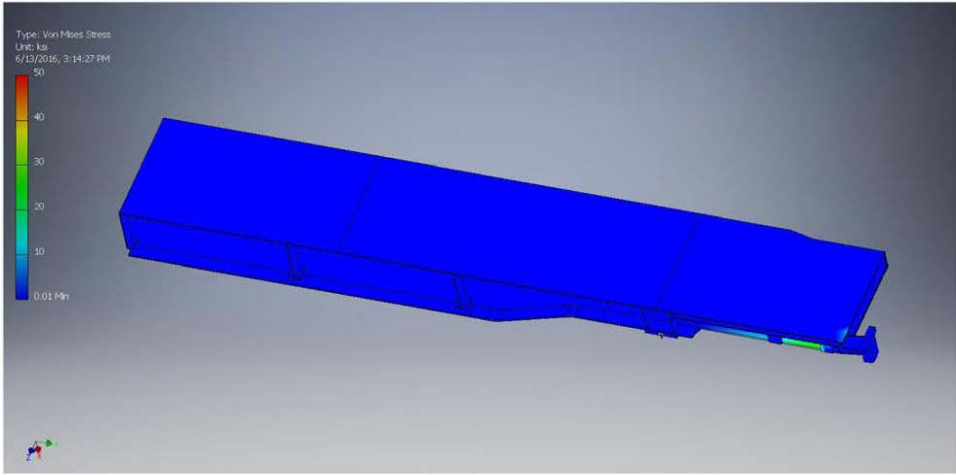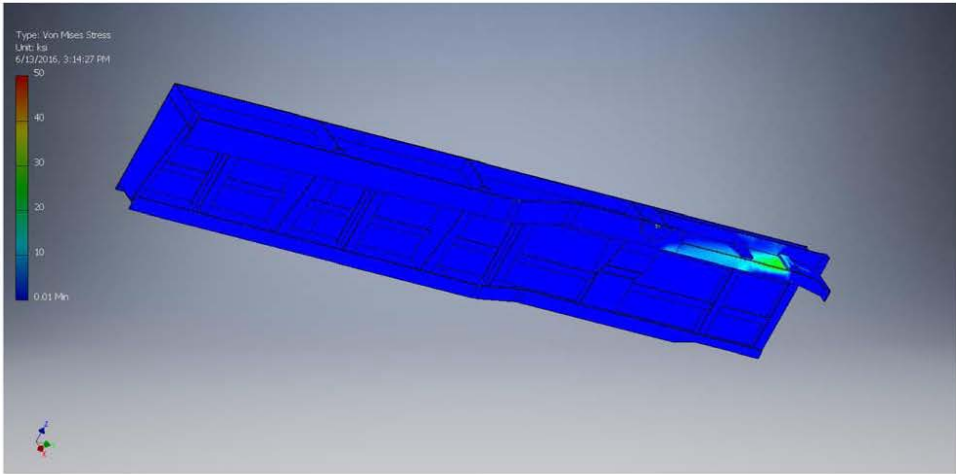



Paragraph 4.1.3.2 d  
Overhang buff

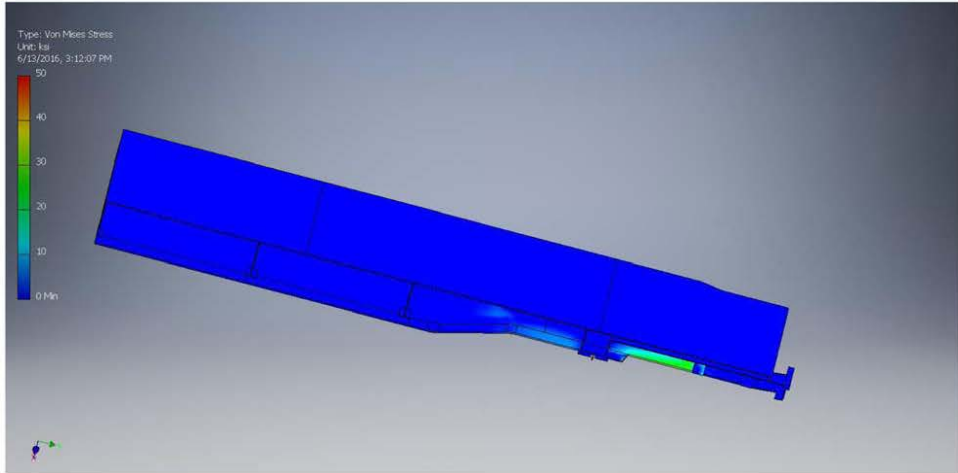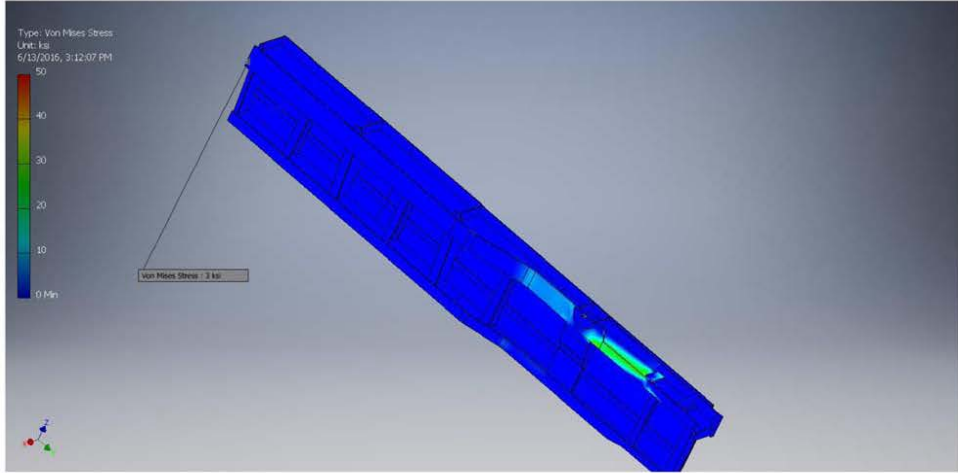

Paragraph 4.1.3.2 d  
Overhang squeeze

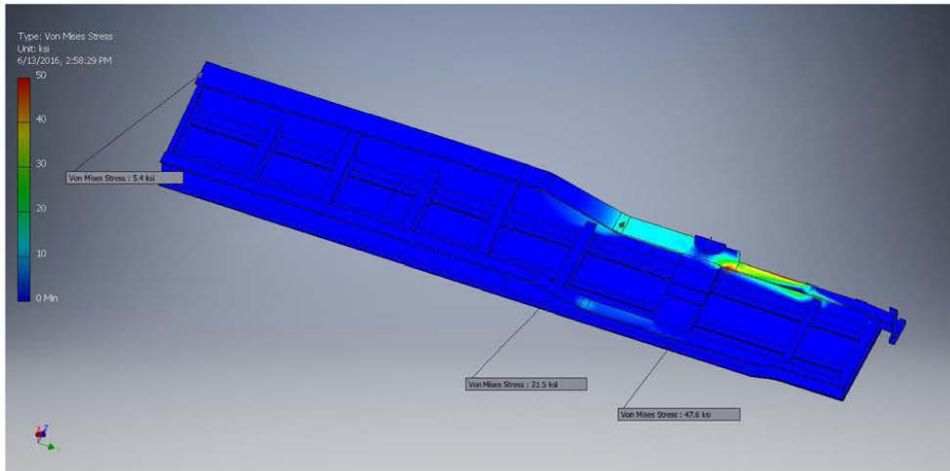
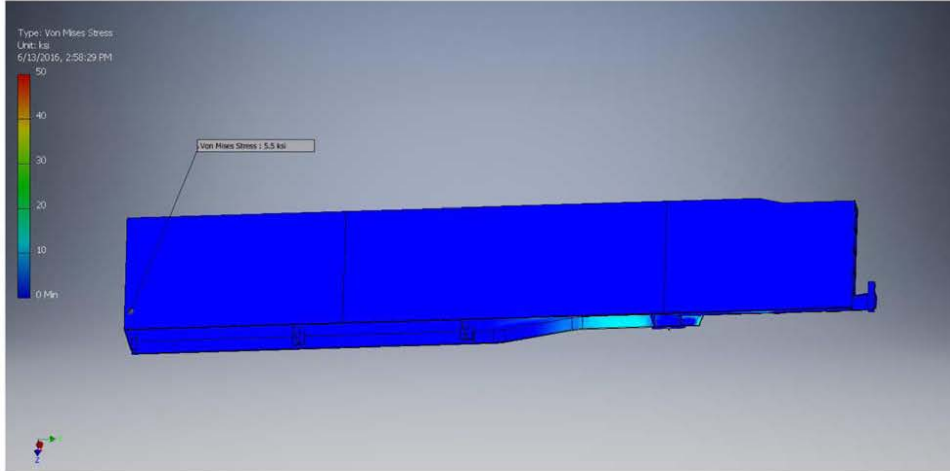


75 % on center sill static  
Paragraph 4.1.3.2 b 1

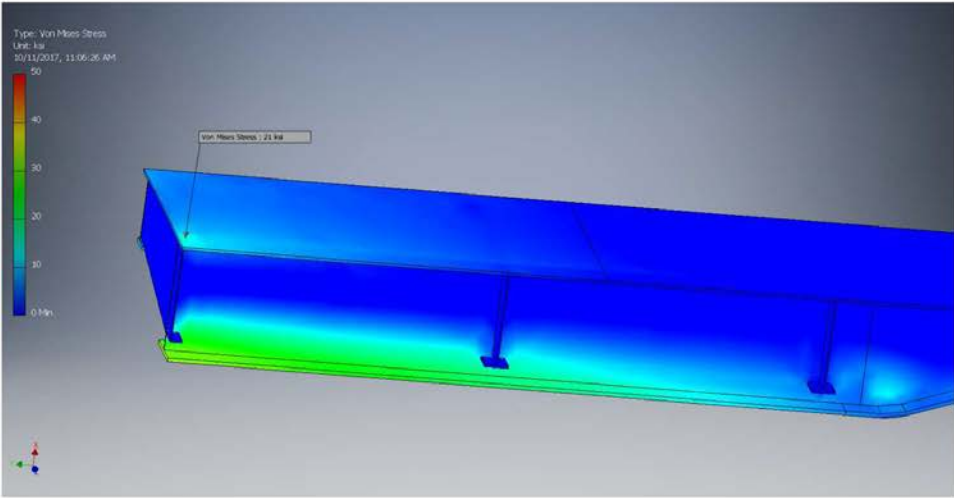
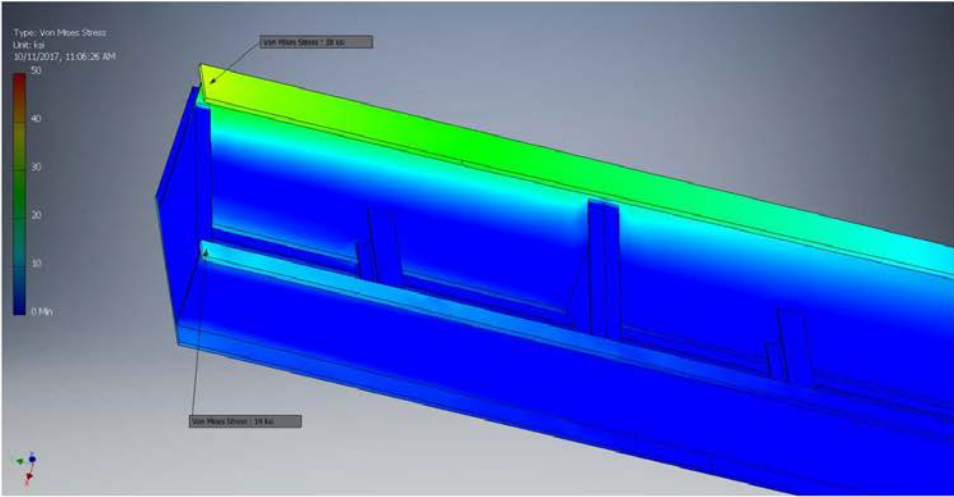


75% on center at center sill with draft



Paragraph 4.1.3.2 b 1

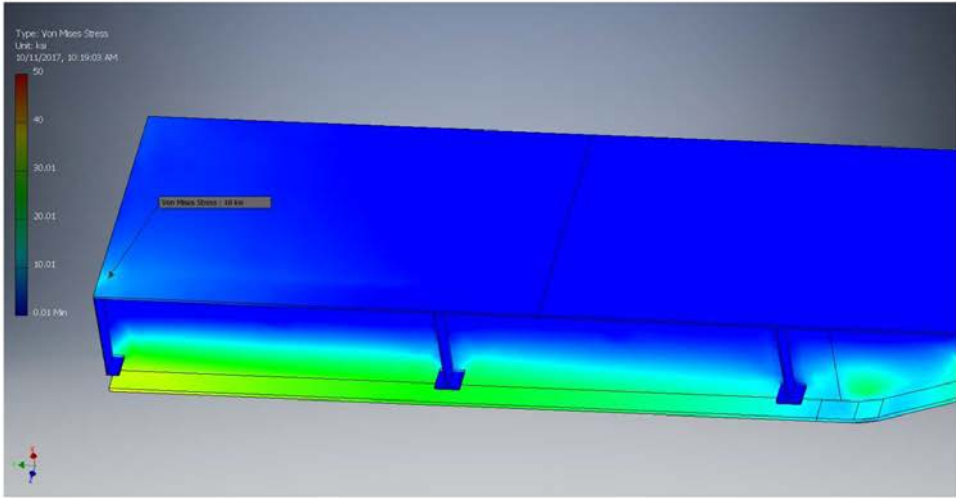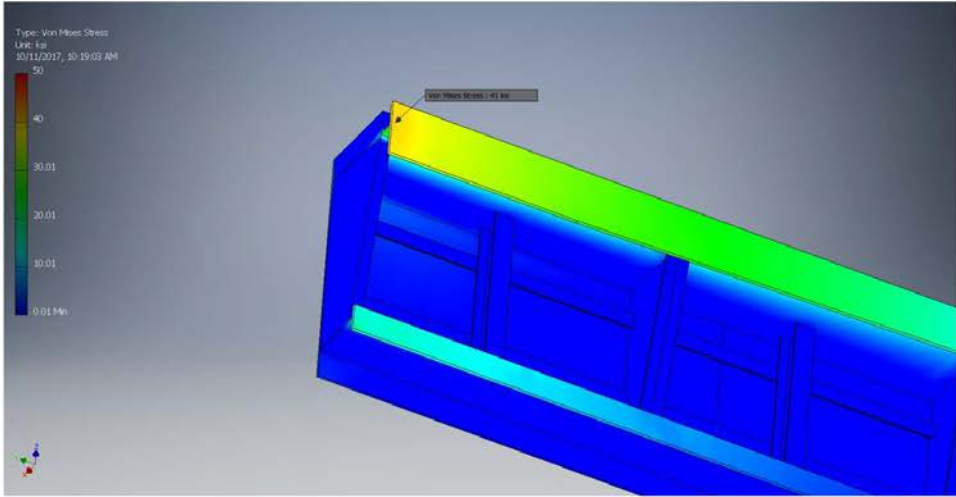



75% on center at center sill with buff  
Paragraph 4.1.3.2 b 1

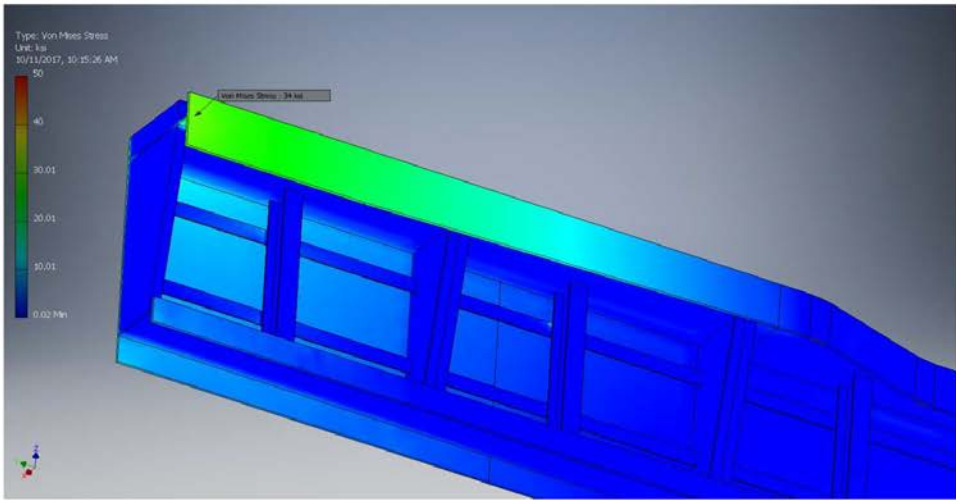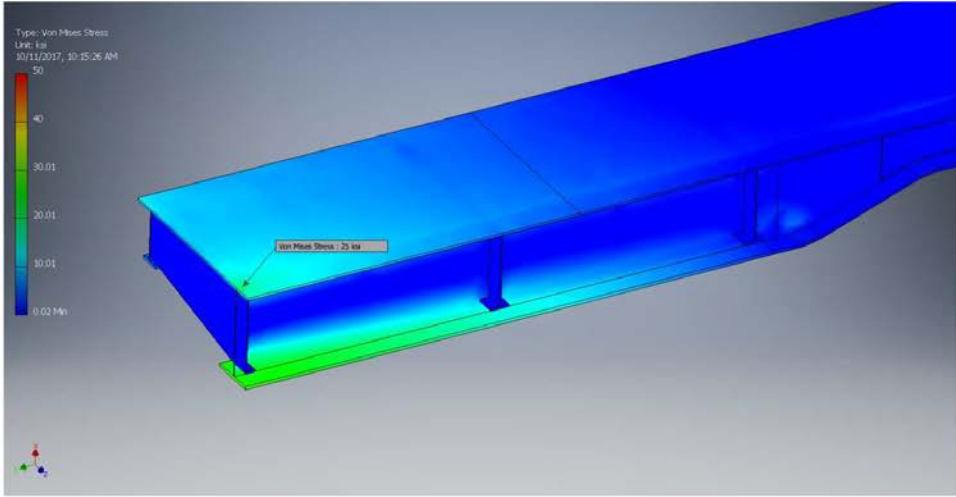

75% on center at center sill with squeeze  
Paragraph 4.1.3.2 b 1

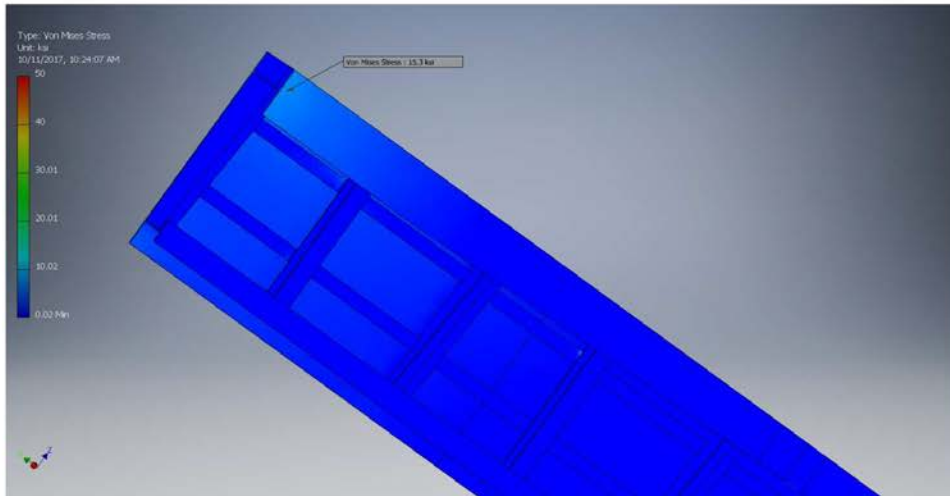
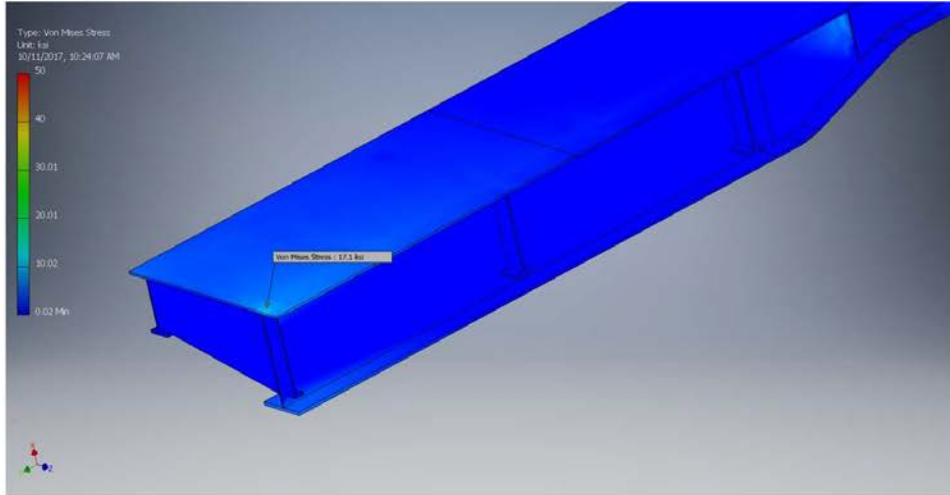


37.5% at side sill static  
Paragraph 4.1.3.2 b 2

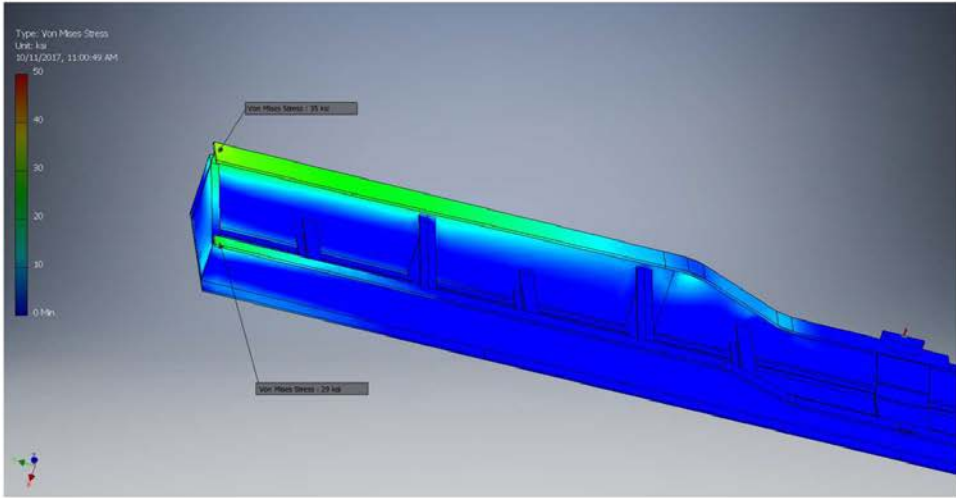
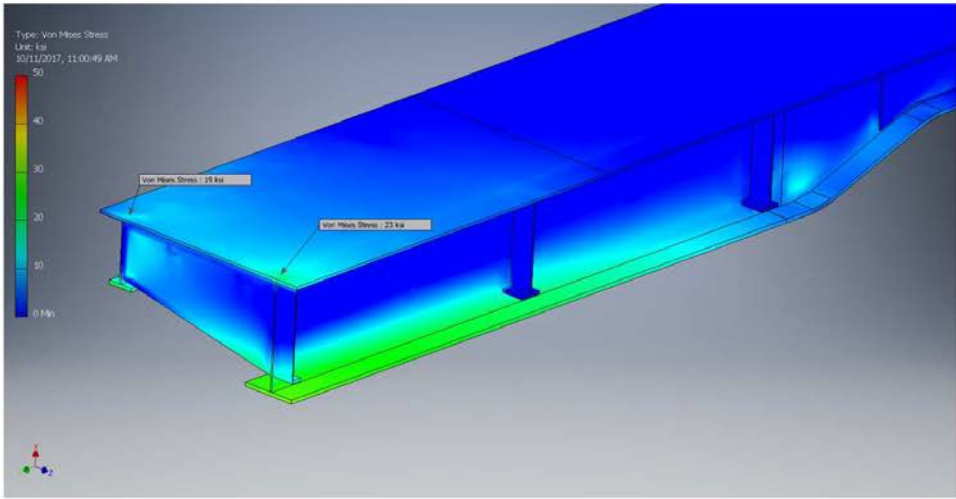


37.5% at side sill with draft



Paragraph 4.1.3.2 b 2

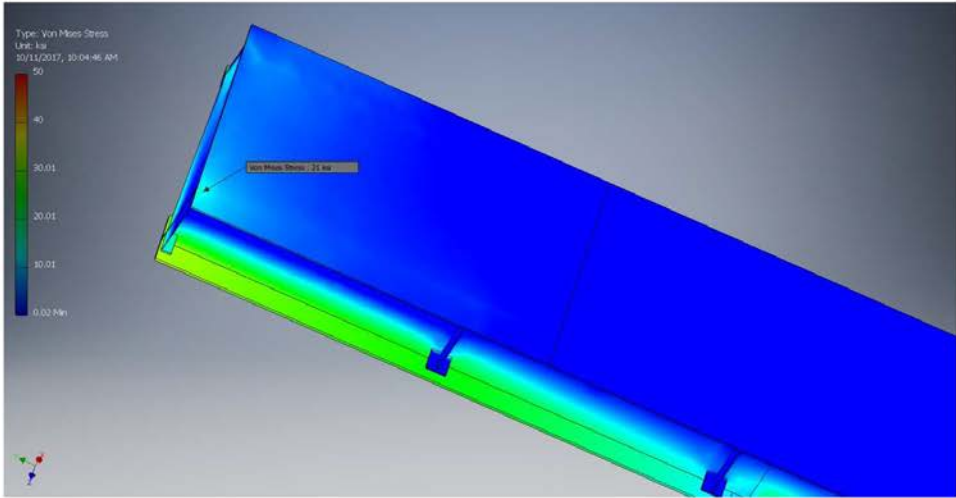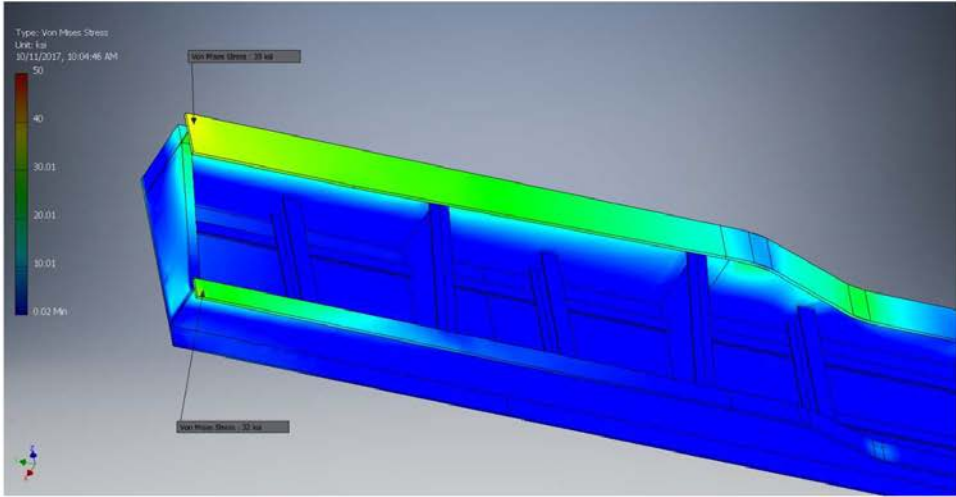

37.5% at side sill with buff  
Paragraph 4.1.3.2 b 2

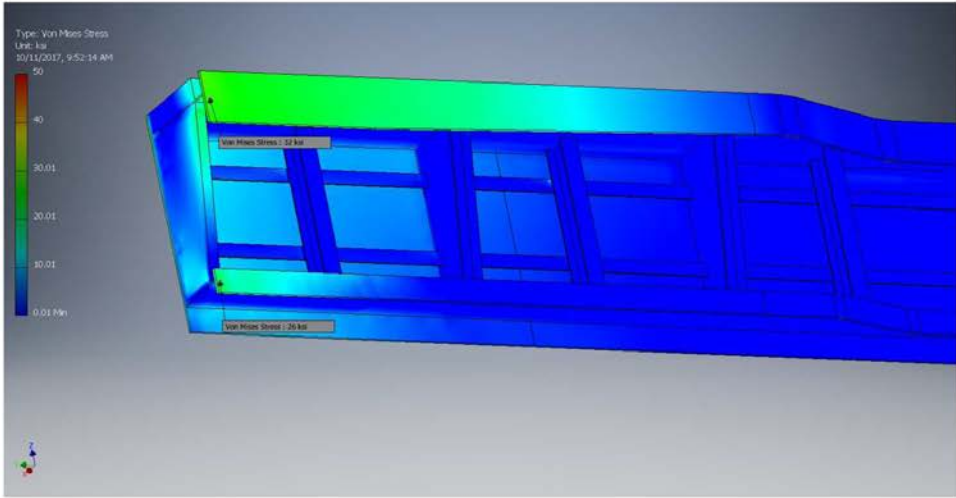
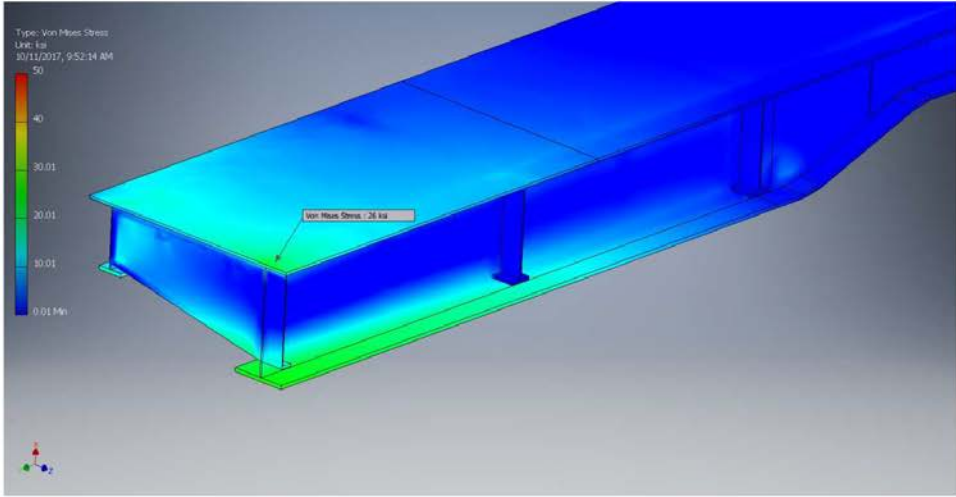


37.5% at side sill with squeeze  
Paragraph 4.1.3.2 b 2

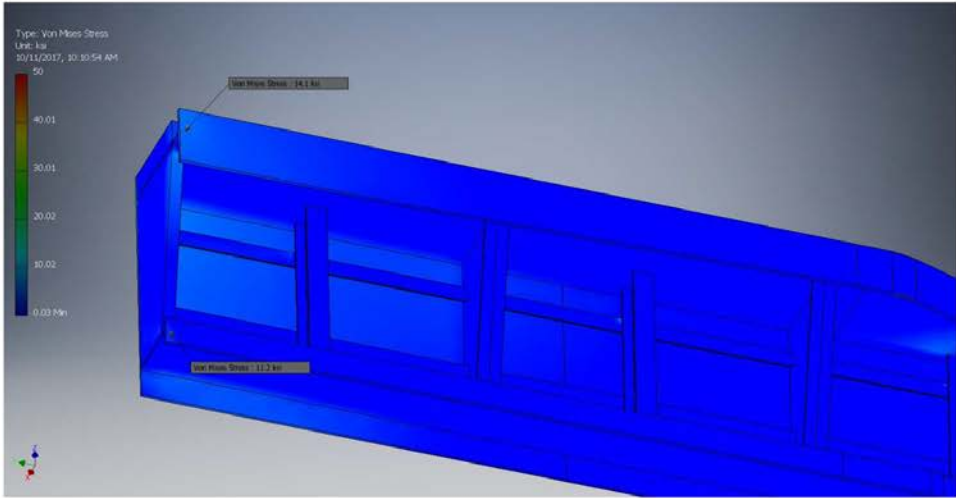
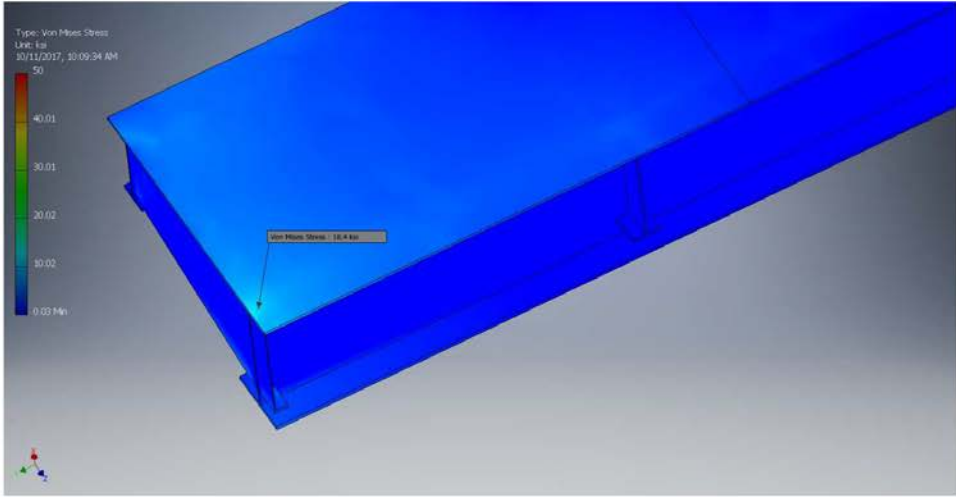



Jacking 40% at jacking pad

Paragraph 4.1.6

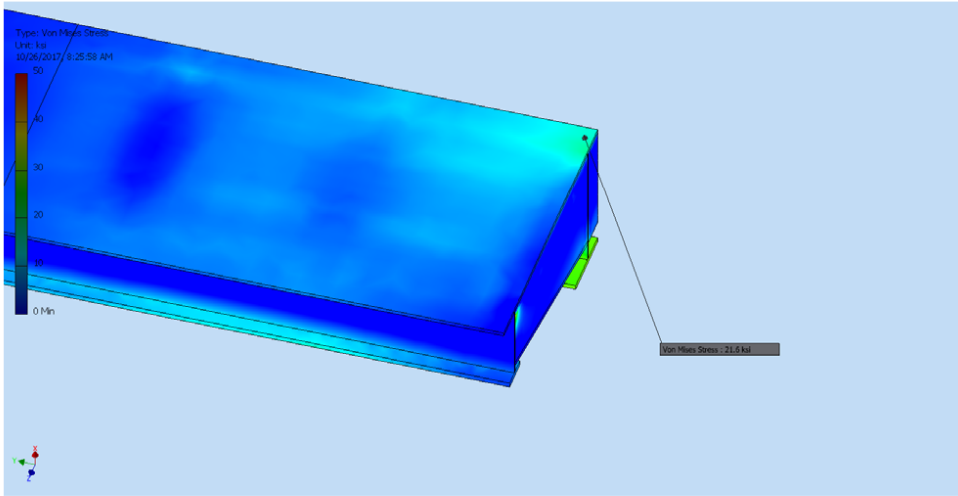
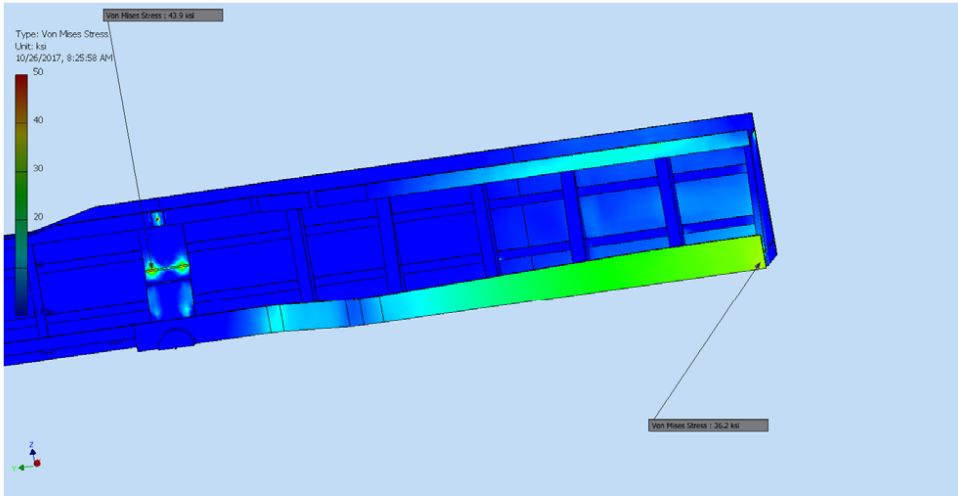


Twist load 3" deflection at wheel  
Paragraph 4.1.5.5 from S-2043  
Simple supports at longitudinal opposite jacking pad and opposite end center plate.

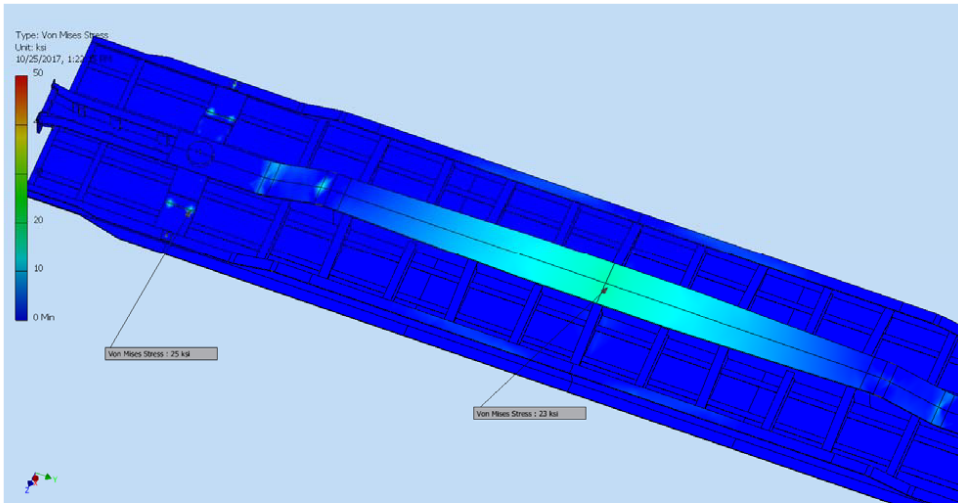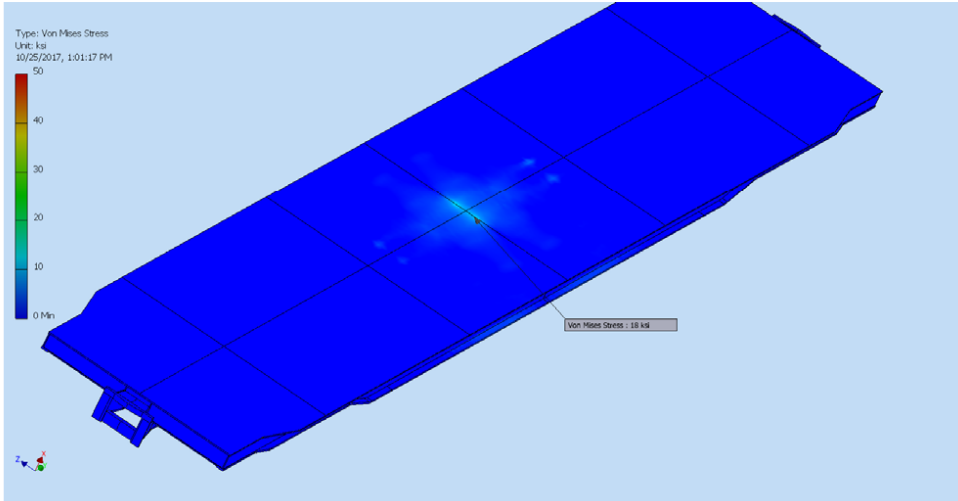


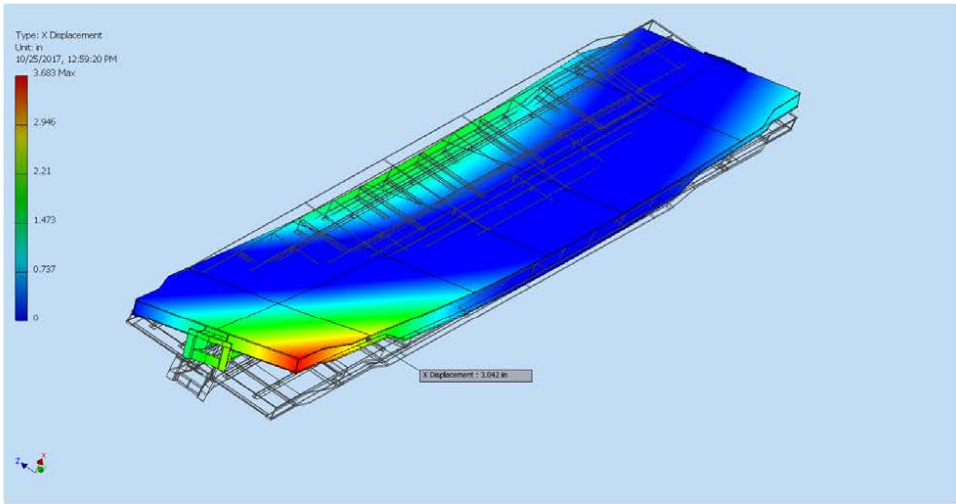


Vertical up and down load on coupler 50,000 lbs  
Paragraph 4.1.5

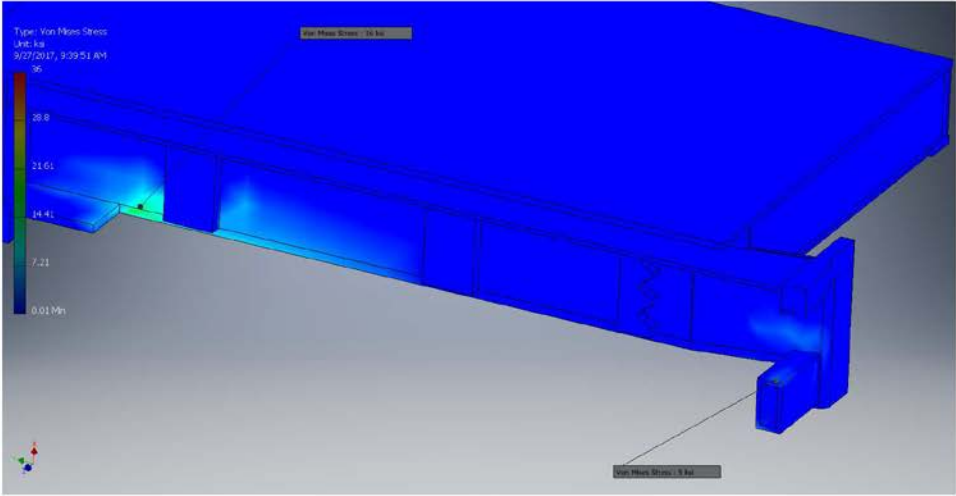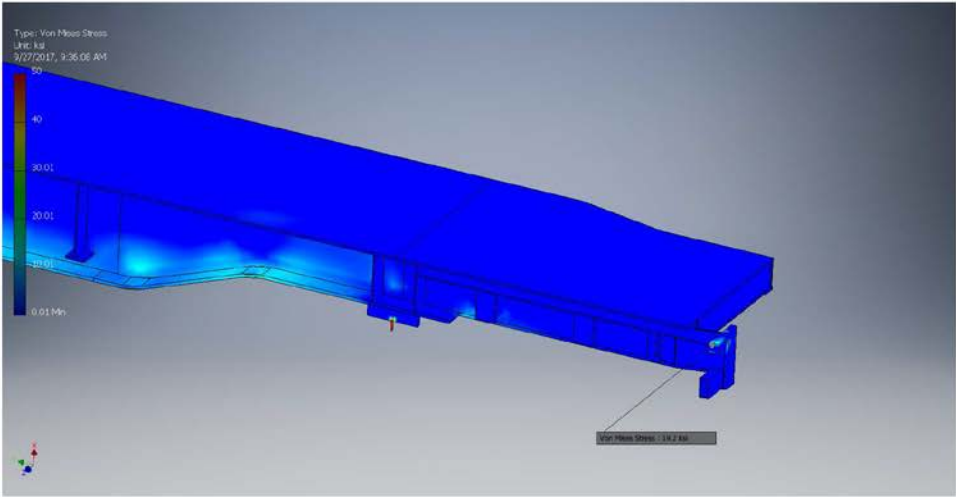


125% Load at striker

Paragraph 4.1.5.1

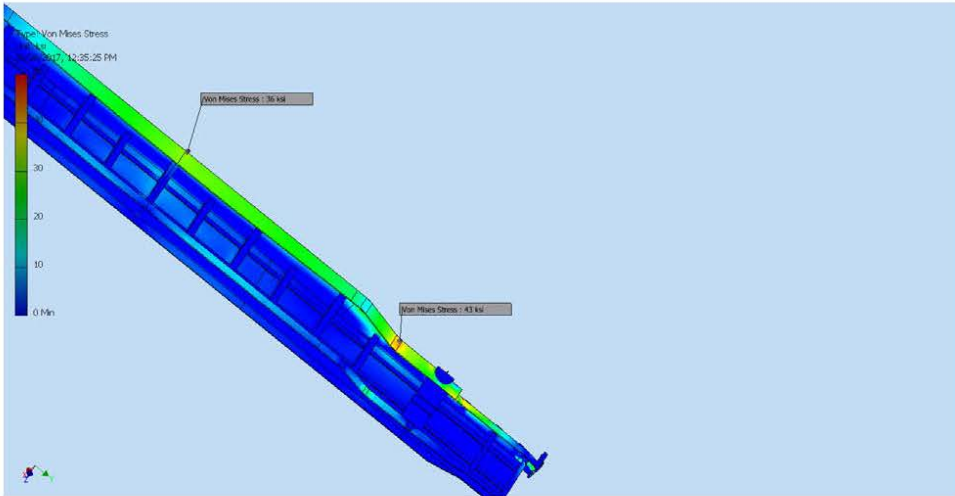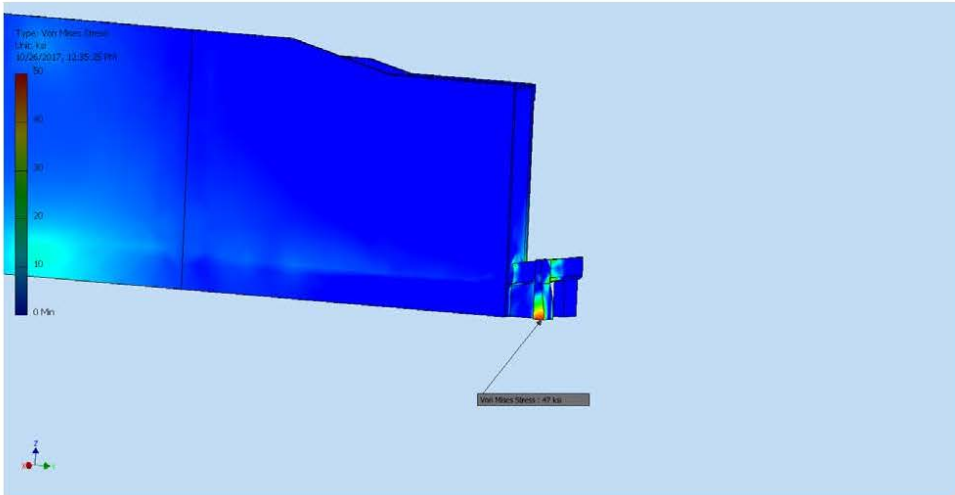

Deflection with load on center 18 feet

Deflection

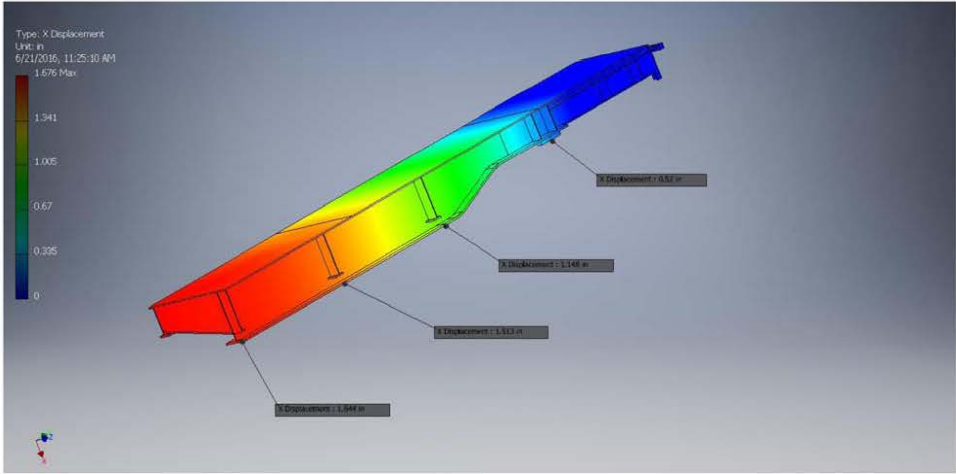

### **FATIGUE ANALYSIS**

Fatigue analysis is based on the AAR method as documented in the MSRP Section C, Part II.

The spreadsheet is based on the AAR method as shown in Table 7.1 and Table 7.2 of the above referenced specification. No data is published for a general service flat car with a steel deck. In lieu of this the data for a high-sided gondola is used.

The only area examined was the center sill bottom flange splice. This will give a more conservative result than the side sill splice because of nominal stress. The draft sill was not analyzed as its design is of the manufacturers recommendation. The bolster has relatively low nominal stresses and is of the same type design as other general service flat cars in use.

Stresses used are from the FEA. The car is basically loaded to full capacity at all times with the dummy weights (as designed) permanently attached and adding substantially to the cross-sectional properties. This was not considered in the analysis thus giving conservative results. However, this does allow a slightly different design of the dummy weights should the necessity arise.

Looking at the twist load a high stress existed in the center sill bottom flange. For this reason the ARR fatigue design was investigated for the torque load. The maximum torsional load was applied to an empty car and a loaded car. This resulted in stress well below the endurance limit of the steel. This was not analyzed further. Results of this loading follow the spreadsheets of the fatigue calculations.

Based on this calculation the calculated lifetime miles is 16 million.

**FATIGUE DATA FOR CENTER SILL AT SPLICE**

(Coupler Load 110 Ton High-sided Gon)

Max	Min	No.	a Pct	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	Cycles to Failure N	a/N	cycles per mile Yield stress Y-int (b) slope k	153.8 50 ksi 17.1 1 0.29
					Max	Min							
430	-250	1	0.00007	12.2	15.6	10.2	15.6	0.655	49.5	106396682	9.40E-11		
410	390	1	0.00007	12.2	15.5	15.3	15.5	0.990	1666.0				
410	310	1	0.00007	12.2	15.5	14.7	15.5	0.949	333.2	NO DAMAGE			
395	365	2	0.00015	12.2	15.4	15.1	15.4	0.984	1102.1	NO DAMAGE			
385	365	1	0.00007	12.2	15.3	15.1	15.3	0.990	1644.6	NO DAMAGE			
380	250	1	0.00007	12.2	15.2	14.2	15.2	0.932	252.4	NO DAMAGE			
360	300	1	0.00007	12.2	15.1	14.6	15.1	0.968	541.1	NO DAMAGE			
360	290	1	0.00007	12.2	15.1	14.5	15.1	0.963	463.8	NO DAMAGE			
360	-130	1	0.00007	12.2	15.1	11.2	15.1	0.742	66.3	NO DAMAGE			
360	-230	1	0.00007	12.2	15.1	10.4	15.1	0.689	55.0	NO DAMAGE			
350	220	1	0.00007	12.2	15.0	14.0	15.0	0.931	248.4	NO DAMAGE			
350	-230	1	0.00007	12.2	15.0	10.4	15.0	0.693	55.7	NO DAMAGE			
340	320	3	0.00022	12.2	14.9	14.8	14.9	0.989	1606.1	NO DAMAGE			
340	-120	1	0.00007	12.2	14.9	11.3	14.9	0.755	69.8	NO DAMAGE			
340	-150	1	0.00007	12.2	14.9	11.0	14.9	0.739	65.6	NO DAMAGE			
330	-120	1	0.00007	12.2	14.8	11.3	14.8	0.759	71.0	NO DAMAGE			
320	310	2	0.00015	12.2	14.8	14.7	14.8	0.995	3178.0	NO DAMAGE			
320	250	1	0.00007	12.2	14.8	14.2	14.8	0.962	454.0	NO DAMAGE			
310	290	2	0.00015	12.2	14.7	14.5	14.7	0.989	1580.5	NO DAMAGE			
310	-210	1	0.00007	12.2	14.7	10.6	14.7	0.719	60.8	NO DAMAGE			
310	-390	1	0.00007	12.2	14.7	9.9	14.7	0.675	52.7	NO DAMAGE			
280	-210	1	0.00007	12.2	14.4	10.6	14.4	0.731	63.5	NO DAMAGE			
270	200	1	0.00007	12.2	14.4	13.8	14.4	0.961	441.8	NO DAMAGE			
270	110	1	0.00007	12.2	14.4	13.1	14.4	0.912	193.3	NO DAMAGE			
270	100	1	0.00007	12.2	14.4	13.0	14.4	0.906	181.9	NO DAMAGE			
270	-10	1	0.00007	12.2	14.4	12.1	14.4	0.845	110.4	NO DAMAGE			
270	-80	1	0.00007	12.2	14.4	11.6	14.4	0.806	88.4	NO DAMAGE			
265	-255	1	0.00007	12.2	14.3	10.2	14.3	0.712	59.3	NO DAMAGE			
260	220	2	0.00015	12.2	14.3	14.0	14.3	0.978	768.9	NO DAMAGE			
260	-20	1	0.00007	12.2	14.3	12.4	14.3	0.867	128.1	NO DAMAGE			
260	-150	1	0.00007	12.2	14.3	11.0	14.3	0.772	75.0	NO DAMAGE			
260	-220	1	0.00007	12.2	14.3	10.5	14.3	0.733	64.1	NO DAMAGE			
260	-240	1	0.00007	12.2	14.3	10.3	14.3	0.722	61.5	NO DAMAGE			
260	-260	1	0.00007	12.2	14.3	10.2	14.3	0.711	59.1	NO DAMAGE			
250	240	1	0.00007	12.2	14.2	14.1	14.2	0.994	3058.3	NO DAMAGE			
250	230	9	0.00067	12.2	14.2	14.0	14.2	0.989	1529.2	NO DAMAGE			
250	220	2	0.00015	12.2	14.2	14.0	14.2	0.983	1019.4	NO DAMAGE			
250	190	1	0.00007	12.2	14.2	13.7	14.2	0.966	509.7	NO DAMAGE			
250	90	1	0.00007	12.2	14.2	12.9	14.2	0.911	191.1	NO DAMAGE			
250	-50	1	0.00007	12.2	14.2	11.8	14.2	0.832	101.9	NO DAMAGE			
250	-100	1	0.00007	12.2	14.2	11.4	14.2	0.804	87.4	NO DAMAGE			
250	-160	1	0.00007	12.2	14.2	10.9	14.2	0.771	74.6	NO DAMAGE			
250	-180	1	0.00007	12.2	14.2	10.8	14.2	0.760	71.1	NO DAMAGE			
250	-220	1	0.00007	12.2	14.2	10.5	14.2	0.737	65.1	NO DAMAGE			
250	-410	1	0.00007	12.2	14.2	9.0	14.2	0.631	46.3	117932880	8.48E-11		
245	225	1	0.00007	12.2	14.2	14.0	14.2	0.989	1524.9	NO DAMAGE			
245	155	1	0.00007	12.2	14.2	13.5	14.2	0.950	338.9	NO DAMAGE			
245	-315	1	0.00007	12.2	14.2	9.7	14.2	0.686	54.5	NO DAMAGE			
240	230	5	0.00037	12.2	14.1	14.0	14.1	0.994	3041.2	NO DAMAGE			
240	220	2	0.00015	12.2	14.1	14.0	14.1	0.989	1520.6	NO DAMAGE			
240	210	2	0.00015	12.2	14.1	13.9	14.1	0.983	1013.7	NO DAMAGE			
240	180	1	0.00007	12.2	14.1	13.6	14.1	0.966	506.9	NO DAMAGE			
240	140	1	0.00007	12.2	14.1	13.3	14.1	0.944	304.1	NO DAMAGE			
240	110	1	0.00007	12.2	14.1	13.1	14.1	0.927	233.9	NO DAMAGE			
240	70	1	0.00007	12.2	14.1	12.8	14.1	0.904	178.9	NO DAMAGE			
240	-70	1	0.00007	12.2	14.1	11.7	14.1	0.826	98.1	NO DAMAGE			
240	-110	1	0.00007	12.2	14.1	11.3	14.1	0.803	86.9	NO DAMAGE			
240	-120	1	0.00007	12.2	14.1	11.3	14.1	0.798	84.5	NO DAMAGE			
240	-160	1	0.00007	12.2	14.1	10.9	14.1	0.775	76.0	NO DAMAGE			
240	-170	1	0.00007	12.2	14.1	10.9	14.1	0.769	74.2	NO DAMAGE			
240	-210	1	0.00007	12.2	14.1	10.6	14.1	0.747	67.6	NO DAMAGE			
240	-240	1	0.00007	12.2	14.1	10.3	14.1	0.730	63.4	NO DAMAGE			
235	225	13	0.00097	12.2	14.1	14.0	14.1	0.994	3032.7	NO DAMAGE			
235	215	9	0.00067	12.2	14.1	13.9	14.1	0.989	1516.3	NO DAMAGE			
230	220	2	0.00015	12.2	14.0	14.0	14.0	0.994	3024.1	NO DAMAGE			
230	200	2	0.00015	12.2	14.0	13.8	14.0	0.983	1008.0	NO DAMAGE			
230	190	2	0.00015	12.2	14.0	13.7	14.0	0.977	756.0	NO DAMAGE			
230	170	1	0.00007	12.2	14.0	13.6	14.0	0.966	504.0	NO DAMAGE			
230	-10	1	0.00007	12.2	14.0	12.1	14.0	0.864	126.0	NO DAMAGE			
230	-90	1	0.00007	12.2	14.0	11.5	14.0	0.819	94.5	NO DAMAGE			
230	-110	1	0.00007	12.2	14.0	11.3	14.0	0.808	88.9	NO DAMAGE			
230	-160	1	0.00007	12.2	14.0	10.9	14.0	0.779	77.5	NO DAMAGE			
230	-180	1	0.00007	12.2	14.0	10.8	14.0	0.768	73.8	NO DAMAGE			
230	-200	1	0.00007	12.2	14.0	10.6	14.0	0.757	70.3	NO DAMAGE			
230	-205	1	0.00007	12.2	14.0	10.6	14.0	0.754	69.5	NO DAMAGE			
230	-260	1	0.00007	12.2	14.0	10.2	14.0	0.723	61.7	NO DAMAGE			
230	-270	1	0.00007	12.2	14.0	10.1	14.0	0.717	60.5	NO DAMAGE			
225	215	22	0.00164	12.2	14.0	13.9	14.0	0.994	3015.6	NO DAMAGE			
225	205	8	0.00060	12.2	14.0	13.8	14.0	0.989	1507.8	NO DAMAGE			
225	-385	1	0.00007	12.2	14.0	9.2	14.0	0.654	49.4	154744264	6.46E-11		
220	210	10	0.00075	12.2	14.0	13.9	14.0	0.994	3007.0	NO DAMAGE			
220	200	6	0.00045	12.2	14.0	13.8	14.0	0.989	1503.5	NO DAMAGE			
220	190	4	0.00030	12.2	14.0	13.7	14.0	0.983	1002.3	NO DAMAGE			

Max	Min	No.	$\alpha$ Pct	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	$\alpha/N$	cycles per mile Yield stress	153.8 50 ksi
					Max	Min							
220	180	2	0.00015	12.2	14.0	13.6	14.0	0.977	751.8	NO DAMAGE			
220	170	3	0.00022	12.2	14.0	13.6	14.0	0.972	601.4	NO DAMAGE			
220	150	1	0.00007	12.2	14.0	13.4	14.0	0.960	429.6	NO DAMAGE			
220	140	1	0.00007	12.2	14.0	13.3	14.0	0.955	375.9	NO DAMAGE			
220	130	1	0.00007	12.2	14.0	13.3	14.0	0.949	334.1	NO DAMAGE			
220	70	1	0.00007	12.2	14.0	12.8	14.0	0.915	200.5	NO DAMAGE			
220	30	1	0.00007	12.2	14.0	12.5	14.0	0.892	158.3	NO DAMAGE			
220	-70	1	0.00007	12.2	14.0	11.7	14.0	0.835	103.7	NO DAMAGE			
220	-90	1	0.00007	12.2	14.0	11.5	14.0	0.824	97.0	NO DAMAGE			
220	-110	1	0.00007	12.2	14.0	11.3	14.0	0.812	91.1	NO DAMAGE			
220	-130	1	0.00007	12.2	14.0	11.2	14.0	0.801	85.9	NO DAMAGE			
220	-135	1	0.00007	12.2	14.0	11.1	14.0	0.798	84.7	NO DAMAGE			
220	-180	3	0.00022	12.2	14.0	10.8	14.0	0.773	75.2	NO DAMAGE			
220	-190	1	0.00007	12.2	14.0	10.7	14.0	0.767	73.3	NO DAMAGE			
220	-220	2	0.00015	12.2	14.0	10.5	14.0	0.750	68.3	NO DAMAGE			
220	-230	1	0.00007	12.2	14.0	10.4	14.0	0.744	66.8	NO DAMAGE			
215	205	14	0.00104	12.2	13.9	13.8	13.9	0.994	2998.5	NO DAMAGE			
215	195	32	0.00239	12.2	13.9	13.8	13.9	0.989	1499.2	NO DAMAGE			
215	185	1	0.00007	12.2	13.9	13.7	13.9	0.983	999.5	NO DAMAGE			
215	165	2	0.00015	12.2	13.9	13.5	13.9	0.971	599.7	NO DAMAGE			
215	-175	1	0.00007	12.2	13.9	10.8	13.9	0.778	76.9	NO DAMAGE			
215	-225	2	0.00015	12.2	13.9	10.4	13.9	0.749	68.1	NO DAMAGE			
215	-325	1	0.00007	12.2	13.9	9.6	13.9	0.692	55.5	NO DAMAGE			
210	200	12	0.00089	12.2	13.9	13.8	13.9	0.994	2999.9	NO DAMAGE			
210	190	17	0.00127	12.2	13.9	13.7	13.9	0.989	1495.0	NO DAMAGE			
210	180	13	0.00097	12.2	13.9	13.6	13.9	0.983	996.6	NO DAMAGE			
210	170	2	0.00015	12.2	13.9	13.6	13.9	0.977	747.5	NO DAMAGE			
210	160	1	0.00007	12.2	13.9	13.5	13.9	0.971	598.0	NO DAMAGE			
210	130	1	0.00007	12.2	13.9	13.3	13.9	0.954	373.7	NO DAMAGE			
210	70	1	0.00007	12.2	13.9	12.8	13.9	0.920	213.6	NO DAMAGE			
210	60	1	0.00007	12.2	13.9	12.7	13.9	0.914	199.3	NO DAMAGE			
210	30	1	0.00007	12.2	13.9	12.5	13.9	0.897	166.1	NO DAMAGE			
210	20	1	0.00007	12.2	13.9	12.4	13.9	0.891	157.4	NO DAMAGE			
210	-10	1	0.00007	12.2	13.9	12.3	13.9	0.886	149.5	NO DAMAGE			
210	-10	2	0.00015	12.2	13.9	12.1	13.9	0.874	135.9	NO DAMAGE			
210	-30	1	0.00007	12.2	13.9	12.0	13.9	0.863	124.6	NO DAMAGE			
210	-90	1	0.00007	12.2	13.9	11.5	13.9	0.828	99.7	NO DAMAGE			
210	-130	2	0.00015	12.2	13.9	11.2	13.9	0.806	87.9	NO DAMAGE			
210	-150	5	0.00037	12.2	13.9	11.0	13.9	0.794	83.1	NO DAMAGE			
210	-160	1	0.00007	12.2	13.9	10.9	13.9	0.788	80.8	NO DAMAGE			
210	-190	1	0.00007	12.2	13.9	10.7	13.9	0.771	74.7	NO DAMAGE			
210	-200	2	0.00015	12.2	13.9	10.6	13.9	0.766	72.9	NO DAMAGE			
210	-210	1	0.00007	12.2	13.9	10.6	13.9	0.760	71.2	NO DAMAGE			
210	-220	2	0.00015	12.2	13.9	10.5	13.9	0.754	69.5	NO DAMAGE			
210	-230	1	0.00007	12.2	13.9	10.4	13.9	0.748	68.0	NO DAMAGE			
205	195	56	0.00417	12.2	13.8	13.8	13.8	0.994	2981.4	NO DAMAGE			
205	185	48	0.00358	12.2	13.8	13.7	13.8	0.989	1490.7	NO DAMAGE			
205	180	2	0.00015	12.2	13.8	13.6	13.8	0.986	1192.5	NO DAMAGE			
205	175	11	0.00082	12.2	13.8	13.6	13.8	0.983	993.8	NO DAMAGE			
205	165	2	0.00015	12.2	13.8	13.5	13.8	0.977	745.3	NO DAMAGE			
205	155	1	0.00007	12.2	13.8	13.5	13.8	0.971	596.3	NO DAMAGE			
205	150	1	0.00007	12.2	13.8	13.4	13.8	0.968	542.1	NO DAMAGE			
205	140	1	0.00007	12.2	13.8	13.3	13.8	0.963	458.7	NO DAMAGE			
205	135	1	0.00007	12.2	13.8	13.3	13.8	0.960	425.9	NO DAMAGE			
205	-85	1	0.00007	12.2	13.8	11.5	13.8	0.834	102.8	NO DAMAGE			
205	-115	1	0.00007	12.2	13.8	11.3	13.8	0.816	93.2	NO DAMAGE			
205	-165	1	0.00007	12.2	13.8	10.9	13.8	0.788	80.6	NO DAMAGE			
205	-180	1	0.00007	12.2	13.8	10.8	13.8	0.779	77.4	NO DAMAGE			
205	-195	1	0.00007	12.2	13.8	10.7	13.8	0.771	74.5	NO DAMAGE			
205	-210	1	0.00007	12.2	13.8	10.6	13.8	0.762	71.8	NO DAMAGE			
205	-220	1	0.00007	12.2	13.8	10.5	13.8	0.756	70.1	NO DAMAGE			
205	-235	1	0.00007	12.2	13.8	10.4	13.8	0.748	67.8	NO DAMAGE			
205	-245	1	0.00007	12.2	13.8	10.3	13.8	0.742	66.3	NO DAMAGE			
205	-285	2	0.00015	12.2	13.8	10.0	13.8	0.719	60.8	NO DAMAGE			
200	190	37	0.00276	12.2	13.8	13.7	13.8	0.994	2972.8	NO DAMAGE			
200	185	11	0.00082	12.2	13.8	13.7	13.8	0.991	1981.9	NO DAMAGE			
200	180	48	0.00358	12.2	13.8	13.6	13.8	0.988	1486.4	NO DAMAGE			
200	175	2	0.00015	12.2	13.8	13.6	13.8	0.986	1189.1	NO DAMAGE			
200	170	22	0.00164	12.2	13.8	13.6	13.8	0.983	990.9	NO DAMAGE			
200	165	3	0.00022	12.2	13.8	13.5	13.8	0.980	849.4	NO DAMAGE			
200	160	10	0.00075	12.2	13.8	13.5	13.8	0.977	743.2	NO DAMAGE			
200	155	2	0.00015	12.2	13.8	13.5	13.8	0.974	660.6	NO DAMAGE			
200	150	3	0.00022	12.2	13.8	13.4	13.8	0.971	594.6	NO DAMAGE			
200	140	4	0.00030	12.2	13.8	13.3	13.8	0.965	495.5	NO DAMAGE			
200	135	2	0.00015	12.2	13.8	13.3	13.8	0.963	457.4	NO DAMAGE			
200	110	1	0.00007	12.2	13.8	13.1	13.8	0.948	330.3	NO DAMAGE			
200	100	2	0.00015	12.2	13.8	13.0	13.8	0.942	297.3	NO DAMAGE			
200	60	1	0.00007	12.2	13.8	12.7	13.8	0.919	212.3	NO DAMAGE			
200	30	1	0.00007	12.2	13.8	12.5	13.8	0.902	174.9	NO DAMAGE			
200	20	2	0.00015	12.2	13.8	12.4	13.8	0.896	165.2	NO DAMAGE			
200	0	1	0.00007	12.2	13.8	12.2	13.8	0.885	148.6	NO DAMAGE			
200	-80	2	0.00015	12.2	13.8	11.6	13.8	0.839	106.2	NO DAMAGE			
200	-100	1	0.00007	12.2	13.8	11.4	13.8	0.827	99.1	NO DAMAGE			
200	-110	1	0.00007	12.2	13.8	11.3	13.8	0.822	95.9	NO DAMAGE			
200	-130	2	0.00015	12.2	13.8	11.2	13.8	0.810	80.1	NO DAMAGE			
200	-135	1	0.00007	12.2	13.8	11.1	13.8	0.807	83.7	NO DAMAGE			
200	-150	1	0.00007	12.2	13.8	11.0	13.8	0.799	84.9	NO DAMAGE			
200	-170	1	0.00007	12.2	13.8	10.9	13.8	0.787	80.3	NO DAMAGE			

Max	Min	No.	$\alpha$ Pct	Static Stress	Dynamic Stress			R Min/Max	Endurance Limit	to Failure N	$\alpha/N$	cycles per mile Yield stress	153.8 50 ksi
					Max	Min	Adjusted						
200	-180	1	0.00007	12.2	13.8	10.8	13.8	0.781	78.2	NO DAMAGE			
200	-220	2	0.00015	12.2	13.8	10.5	13.8	0.758	70.8	NO DAMAGE			
200	-240	1	0.00007	12.2	13.8	10.3	13.8	0.747	67.6	NO DAMAGE			
200	-260	2	0.00015	12.2	13.8	10.2	13.8	0.735	64.6	NO DAMAGE			
200	-265	1	0.00007	12.2	13.8	10.1	13.8	0.733	63.9	NO DAMAGE			
195	185	174	0.01297	12.2	13.8	13.7	13.8	0.994	2964.3	NO DAMAGE			
195	180	10	0.00075	12.2	13.8	13.6	13.8	0.991	1976.2	NO DAMAGE			
195	175	103	0.00768	12.2	13.8	13.6	13.8	0.988	1482.1	NO DAMAGE			
195	170	6	0.00045	12.2	13.8	13.6	13.8	0.986	1185.7	NO DAMAGE			
195	165	30	0.00224	12.2	13.8	13.5	13.8	0.983	988.1	NO DAMAGE			
195	160	5	0.00037	12.2	13.8	13.5	13.8	0.980	846.9	NO DAMAGE			
195	155	21	0.00157	12.2	13.8	13.5	13.8	0.977	741.1	NO DAMAGE			
195	150	2	0.00015	12.2	13.8	13.4	13.8	0.974	658.7	NO DAMAGE			
195	145	4	0.00030	12.2	13.8	13.4	13.8	0.971	592.9	NO DAMAGE			
195	140	3	0.00022	12.2	13.8	13.3	13.8	0.968	539.0	NO DAMAGE			
195	135	3	0.00022	12.2	13.8	13.3	13.8	0.965	494.0	NO DAMAGE			
195	125	1	0.00007	12.2	13.8	13.2	13.8	0.960	423.5	NO DAMAGE			
195	115	2	0.00015	12.2	13.8	13.1	13.8	0.954	370.5	NO DAMAGE			
195	95	1	0.00007	12.2	13.8	13.0	13.8	0.942	296.4	NO DAMAGE			
195	85	2	0.00015	12.2	13.8	12.9	13.8	0.937	269.5	NO DAMAGE			
195	75	1	0.00007	12.2	13.8	12.8	13.8	0.931	247.0	NO DAMAGE			
195	55	1	0.00007	12.2	13.8	12.7	13.8	0.919	211.7	NO DAMAGE			
195	45	2	0.00015	12.2	13.8	12.6	13.8	0.913	197.6	NO DAMAGE			
195	35	1	0.00007	12.2	13.8	12.5	13.8	0.908	185.3	NO DAMAGE			
195	5	1	0.00007	12.2	13.8	12.3	13.8	0.890	156.0	NO DAMAGE			
195	-75	1	0.00007	12.2	13.8	11.6	13.8	0.844	109.8	NO DAMAGE			
195	-105	1	0.00007	12.2	13.8	11.4	13.8	0.827	98.8	NO DAMAGE			
195	-125	1	0.00007	12.2	13.8	11.2	13.8	0.815	92.6	NO DAMAGE			
195	-135	1	0.00007	12.2	13.8	11.1	13.8	0.810	89.8	NO DAMAGE			
195	-145	1	0.00007	12.2	13.8	11.1	13.8	0.804	87.2	NO DAMAGE			
195	-155	2	0.00015	12.2	13.8	11.0	13.8	0.798	84.7	NO DAMAGE			
195	-165	1	0.00007	12.2	13.8	10.9	13.8	0.792	82.3	NO DAMAGE			
195	-195	1	0.00007	12.2	13.8	10.7	13.8	0.775	76.0	NO DAMAGE			
195	-235	1	0.00007	12.2	13.8	10.4	13.8	0.752	69.8	NO DAMAGE			
195	-245	2	0.00015	12.2	13.8	10.3	13.8	0.746	67.4	NO DAMAGE			
195	-255	2	0.00015	12.2	13.8	10.2	13.8	0.740	65.9	NO DAMAGE			
195	-265	1	0.00007	12.2	13.8	10.1	13.8	0.735	64.4	NO DAMAGE			
195	-275	1	0.00007	12.2	13.8	10.0	13.8	0.729	63.1	NO DAMAGE			
195	-595	1	0.00007	12.2	13.8	7.5	13.8	0.544	37.5	63442844	1.58E-10		
190	180	141	0.01051	12.2	13.7	13.6	13.7	0.994	2955.7	NO DAMAGE			
190	175	31	0.00231	12.2	13.7	13.6	13.7	0.991	1970.5	NO DAMAGE			
190	170	117	0.00872	12.2	13.7	13.6	13.7	0.988	1477.9	NO DAMAGE			
190	165	17	0.00127	12.2	13.7	13.5	13.7	0.986	1182.3	NO DAMAGE			
190	160	45	0.00395	12.2	13.7	13.5	13.7	0.983	985.2	NO DAMAGE			
190	155	4	0.00030	12.2	13.7	13.5	13.7	0.980	844.5	NO DAMAGE			
190	150	8	0.00060	12.2	13.7	13.4	13.7	0.977	738.9	NO DAMAGE			
190	145	1	0.00007	12.2	13.7	13.4	13.7	0.974	656.8	NO DAMAGE			
190	140	5	0.00037	12.2	13.7	13.3	13.7	0.971	591.1	NO DAMAGE			
190	120	2	0.00015	12.2	13.7	13.2	13.7	0.960	422.2	NO DAMAGE			
190	115	1	0.00007	12.2	13.7	13.1	13.7	0.957	394.1	NO DAMAGE			
190	110	3	0.00022	12.2	13.7	13.1	13.7	0.954	369.5	NO DAMAGE			
190	100	2	0.00015	12.2	13.7	13.0	13.7	0.948	328.4	NO DAMAGE			
190	80	1	0.00007	12.2	13.7	12.9	13.7	0.936	268.7	NO DAMAGE			
190	75	1	0.00007	12.2	13.7	12.8	13.7	0.933	257.0	NO DAMAGE			
190	70	1	0.00007	12.2	13.7	12.8	13.7	0.931	248.3	NO DAMAGE			
190	50	2	0.00015	12.2	13.7	12.6	13.7	0.919	211.1	NO DAMAGE			
190	40	1	0.00007	12.2	13.7	12.5	13.7	0.913	197.0	NO DAMAGE			
190	30	2	0.00015	12.2	13.7	12.5	13.7	0.907	184.7	NO DAMAGE			
190	25	1	0.00007	12.2	13.7	12.4	13.7	0.905	179.1	NO DAMAGE			
190	10	1	0.00007	12.2	13.7	12.3	13.7	0.896	164.2	NO DAMAGE			
190	-10	1	0.00007	12.2	13.7	12.1	13.7	0.884	147.8	NO DAMAGE			
190	-20	1	0.00007	12.2	13.7	12.1	13.7	0.879	140.7	NO DAMAGE			
190	-45	1	0.00007	12.2	13.7	11.9	13.7	0.864	125.8	NO DAMAGE			
190	-50	1	0.00007	12.2	13.7	11.8	13.7	0.861	123.2	NO DAMAGE			
190	-90	1	0.00007	12.2	13.7	11.5	13.7	0.838	105.6	NO DAMAGE			
190	-100	3	0.00022	12.2	13.7	11.4	13.7	0.832	101.9	NO DAMAGE			
190	-130	2	0.00015	12.2	13.7	11.2	13.7	0.815	92.4	NO DAMAGE			
190	-165	1	0.00007	12.2	13.7	10.9	13.7	0.795	83.3	NO DAMAGE			
190	-190	3	0.00022	12.2	13.7	10.7	13.7	0.780	77.8	NO DAMAGE			
190	-195	1	0.00007	12.2	13.7	10.7	13.7	0.777	76.8	NO DAMAGE			
185	175	578	0.04309	12.2	13.7	13.6	13.7	0.994	2947.2	NO DAMAGE			
185	170	102	0.00760	12.2	13.7	13.6	13.7	0.991	1964.8	NO DAMAGE			
185	165	566	0.04220	12.2	13.7	13.5	13.7	0.988	1473.6	NO DAMAGE			
185	160	5	0.00037	12.2	13.7	13.5	13.7	0.985	1178.9	NO DAMAGE			
185	155	142	0.01059	12.2	13.7	13.5	13.7	0.983	982.4	NO DAMAGE			
185	150	4	0.00030	12.2	13.7	13.4	13.7	0.980	842.0	NO DAMAGE			
185	145	38	0.00283	12.2	13.7	13.4	13.7	0.977	736.8	NO DAMAGE			
185	140	1	0.00007	12.2	13.7	13.3	13.7	0.974	654.9	NO DAMAGE			
185	135	9	0.00067	12.2	13.7	13.3	13.7	0.971	589.4	NO DAMAGE			
185	130	1	0.00007	12.2	13.7	13.3	13.7	0.968	535.8	NO DAMAGE			
185	125	1	0.00007	12.2	13.7	13.2	13.7	0.965	491.2	NO DAMAGE			
185	120	1	0.00007	12.2	13.7	13.2	13.7	0.962	453.4	NO DAMAGE			
185	115	4	0.00030	12.2	13.7	13.1	13.7	0.959	421.0	NO DAMAGE			
185	105	5	0.00037	12.2	13.7	13.1	13.7	0.954	368.4	NO DAMAGE			
185	95	1	0.00007	12.2	13.7	13.0	13.7	0.948	327.5	NO DAMAGE			
185	85	1	0.00007	12.2	13.7	12.9	13.7	0.942	294.7	NO DAMAGE			
185	80	1	0.00007	12.2	13.7	12.9	13.7	0.939	280.7	NO DAMAGE			
185	75	1	0.00007	12.2	13.7	12.8	13.7	0.936	267.9	NO DAMAGE			

Max	Min	No.	α Pct	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	α/N	cycles per mile Yield stress	153.8 ksi
					Max	Min							
185	65	1	0.00007	12.2	13.7	12.7	13.7	0.930	245.6	NO DAMAGE			
185	80	1	0.00007	12.2	13.7	12.7	13.7	0.927	235.8	NO DAMAGE			
185	55	2	0.00015	12.2	13.7	12.7	13.7	0.925	226.7	NO DAMAGE			
185	35	2	0.00015	12.2	13.7	12.5	13.7	0.913	196.5	NO DAMAGE			
185	25	3	0.00022	12.2	13.7	12.4	13.7	0.907	184.2	NO DAMAGE			
185	20	1	0.00007	12.2	13.7	12.4	13.7	0.904	178.6	NO DAMAGE			
185	15	2	0.00015	12.2	13.7	12.3	13.7	0.901	173.4	NO DAMAGE			
185	5	3	0.00022	12.2	13.7	12.3	13.7	0.896	163.7	NO DAMAGE			
185	-5	1	0.00007	12.2	13.7	12.2	13.7	0.890	155.1	NO DAMAGE			
185	-15	1	0.00007	12.2	13.7	12.1	13.7	0.884	147.4	NO DAMAGE			
185	-65	1	0.00007	12.2	13.7	11.7	13.7	0.855	117.9	NO DAMAGE			
185	-95	1	0.00007	12.2	13.7	11.5	13.7	0.838	105.3	NO DAMAGE			
185	-100	1	0.00007	12.2	13.7	11.4	13.7	0.835	103.4	NO DAMAGE			
185	-105	1	0.00007	12.2	13.7	11.4	13.7	0.832	101.6	NO DAMAGE			
185	-115	1	0.00007	12.2	13.7	11.3	13.7	0.826	98.2	NO DAMAGE			
185	-120	1	0.00007	12.2	13.7	11.3	13.7	0.823	96.6	NO DAMAGE			
185	-125	3	0.00022	12.2	13.7	11.2	13.7	0.820	95.1	NO DAMAGE			
185	-145	1	0.00007	12.2	13.7	11.1	13.7	0.809	89.3	NO DAMAGE			
185	-155	2	0.00015	12.2	13.7	11.0	13.7	0.803	86.7	NO DAMAGE			
185	-160	1	0.00007	12.2	13.7	10.9	13.7	0.800	85.4	NO DAMAGE			
185	-165	5	0.00037	12.2	13.7	10.9	13.7	0.797	84.2	NO DAMAGE			
185	-170	1	0.00007	12.2	13.7	10.9	13.7	0.794	83.0	NO DAMAGE			
185	-175	2	0.00015	12.2	13.7	10.8	13.7	0.791	81.9	NO DAMAGE			
185	-180	1	0.00007	12.2	13.7	10.8	13.7	0.788	80.7	NO DAMAGE			
185	-190	1	0.00007	12.2	13.7	10.7	13.7	0.782	78.6	NO DAMAGE			
185	-195	2	0.00015	12.2	13.7	10.7	13.7	0.780	77.6	NO DAMAGE			
185	-200	2	0.00015	12.2	13.7	10.6	13.7	0.777	76.5	NO DAMAGE			
185	-205	1	0.00007	12.2	13.7	10.6	13.7	0.774	75.6	NO DAMAGE			
185	-215	2	0.00015	12.2	13.7	10.5	13.7	0.768	73.7	NO DAMAGE			
185	-235	2	0.00015	12.2	13.7	10.4	13.7	0.756	70.2	NO DAMAGE			
185	-245	3	0.00022	12.2	13.7	10.3	13.7	0.751	68.5	NO DAMAGE			
185	-275	1	0.00007	12.2	13.7	10.0	13.7	0.733	64.1	NO DAMAGE			
185	-355	1	0.00007	12.2	13.7	9.4	13.7	0.687	54.6	NO DAMAGE			
180	170	389	0.02900	12.2	13.6	13.6	13.6	0.994	2936.6	NO DAMAGE			
180	165	84	0.00626	12.2	13.6	13.5	13.6	0.991	1959.1	NO DAMAGE			
180	160	216	0.01610	12.2	13.6	13.5	13.6	0.988	1469.3	NO DAMAGE			
180	155	23	0.00171	12.2	13.6	13.5	13.6	0.985	1175.4	NO DAMAGE			
180	150	53	0.00395	12.2	13.6	13.4	13.6	0.983	979.5	NO DAMAGE			
180	145	4	0.00030	12.2	13.6	13.4	13.6	0.980	839.6	NO DAMAGE			
180	140	42	0.00313	12.2	13.6	13.3	13.6	0.977	734.7	NO DAMAGE			
180	135	7	0.00052	12.2	13.6	13.3	13.6	0.974	653.0	NO DAMAGE			
180	130	8	0.00060	12.2	13.6	13.3	13.6	0.971	587.7	NO DAMAGE			
180	125	2	0.00015	12.2	13.6	13.2	13.6	0.968	534.3	NO DAMAGE			
180	120	1	0.00007	12.2	13.6	13.2	13.6	0.965	489.8	NO DAMAGE			
180	110	3	0.00022	12.2	13.6	13.1	13.6	0.959	419.8	NO DAMAGE			
180	105	2	0.00015	12.2	13.6	13.1	13.6	0.956	391.8	NO DAMAGE			
180	95	1	0.00007	12.2	13.6	13.0	13.6	0.951	345.7	NO DAMAGE			
180	90	2	0.00015	12.2	13.6	12.9	13.6	0.948	326.5	NO DAMAGE			
180	80	5	0.00037	12.2	13.6	12.9	13.6	0.942	293.9	NO DAMAGE			
180	75	1	0.00007	12.2	13.6	12.8	13.6	0.939	279.9	NO DAMAGE			
180	60	2	0.00015	12.2	13.6	12.7	13.6	0.930	244.9	NO DAMAGE			
180	45	1	0.00007	12.2	13.6	12.6	13.6	0.921	217.7	NO DAMAGE			
180	40	1	0.00007	12.2	13.6	12.5	13.6	0.919	209.9	NO DAMAGE			
180	30	2	0.00015	12.2	13.6	12.5	13.6	0.913	195.9	NO DAMAGE			
180	20	1	0.00007	12.2	13.6	12.4	13.6	0.907	183.7	NO DAMAGE			
180	0	2	0.00015	12.2	13.6	12.2	13.6	0.895	163.3	NO DAMAGE			
180	-5	1	0.00007	12.2	13.6	12.2	13.6	0.892	158.8	NO DAMAGE			
180	-10	3	0.00022	12.2	13.6	12.1	13.6	0.889	154.7	NO DAMAGE			
180	-45	1	0.00007	12.2	13.6	11.9	13.6	0.869	130.6	NO DAMAGE			
180	-60	3	0.00022	12.2	13.6	11.7	13.6	0.860	122.4	NO DAMAGE			
180	-70	2	0.00015	12.2	13.6	11.7	13.6	0.855	117.5	NO DAMAGE			
180	-80	2	0.00015	12.2	13.6	11.6	13.6	0.849	113.0	NO DAMAGE			
180	-90	2	0.00015	12.2	13.6	11.5	13.6	0.843	108.8	NO DAMAGE			
180	-100	2	0.00015	12.2	13.6	11.4	13.6	0.837	105.0	NO DAMAGE			
180	-110	4	0.00030	12.2	13.6	11.3	13.6	0.831	101.3	NO DAMAGE			
180	-120	1	0.00007	12.2	13.6	11.3	13.6	0.825	98.0	NO DAMAGE			
180	-130	2	0.00015	12.2	13.6	11.2	13.6	0.820	94.8	NO DAMAGE			
180	-140	1	0.00007	12.2	13.6	11.1	13.6	0.814	91.8	NO DAMAGE			
180	-145	1	0.00007	12.2	13.6	11.1	13.6	0.811	90.4	NO DAMAGE			
180	-150	3	0.00022	12.2	13.6	11.0	13.6	0.808	89.0	NO DAMAGE			
180	-160	1	0.00007	12.2	13.6	10.9	13.6	0.802	86.4	NO DAMAGE			
180	-170	2	0.00015	12.2	13.6	10.9	13.6	0.796	84.0	NO DAMAGE			
180	-185	1	0.00007	12.2	13.6	10.8	13.6	0.788	80.5	NO DAMAGE			
180	-190	1	0.00007	12.2	13.6	10.7	13.6	0.785	79.4	NO DAMAGE			
180	-200	2	0.00015	12.2	13.6	10.6	13.6	0.779	77.3	NO DAMAGE			
180	-210	1	0.00007	12.2	13.6	10.6	13.6	0.773	75.3	NO DAMAGE			
180	-215	1	0.00007	12.2	13.6	10.5	13.6	0.770	74.4	NO DAMAGE			
180	-230	1	0.00007	12.2	13.6	10.4	13.6	0.761	71.7	NO DAMAGE			
180	-240	1	0.00007	12.2	13.6	10.3	13.6	0.756	70.0	NO DAMAGE			
175	165	835	0.06225	12.2	13.6	13.5	13.6	0.994	2930.1	NO DAMAGE			
175	160	85	0.00634	12.2	13.6	13.5	13.6	0.991	1953.4	NO DAMAGE			
175	155	529	0.03944	12.2	13.6	13.5	13.6	0.988	1465.0	NO DAMAGE			
175	150	20	0.00149	12.2	13.6	13.4	13.6	0.985	1172.0	NO DAMAGE			
175	145	231	0.01722	12.2	13.6	13.4	13.6	0.982	976.7	NO DAMAGE			
175	140	21	0.00157	12.2	13.6	13.3	13.6	0.980	837.2	NO DAMAGE			
175	135	40	0.00286	12.2	13.6	13.3	13.6	0.977	732.5	NO DAMAGE			
175	130	6	0.00045	12.2	13.6	13.3	13.6	0.974	651.1	NO DAMAGE			
175	125	8	0.00060	12.2	13.6	13.2	13.6	0.971	586.0	NO DAMAGE			

Max	Min	No.	α	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	α/N	cycles per mile Yield stress	153.8 50 ksi
					Max	Min							
175	120	2	0.00015	12.2	13.6	13.2	13.6	0.968	532.7	NO DAMAGE			
175	115	6	0.00045	12.2	13.6	13.1	13.6	0.965	488.3	NO DAMAGE			
175	105	3	0.00022	12.2	13.6	13.1	13.6	0.959	418.6	NO DAMAGE			
175	85	1	0.00007	12.2	13.6	12.7	13.6	0.936	286.4	NO DAMAGE			
175	45	1	0.00007	12.2	13.6	12.6	13.6	0.924	225.4	NO DAMAGE			
175	35	1	0.00007	12.2	13.6	12.5	13.6	0.918	209.3	NO DAMAGE			
175	25	1	0.00007	12.2	13.6	12.4	13.6	0.912	195.3	NO DAMAGE			
175	20	1	0.00007	12.2	13.6	12.4	13.6	0.910	189.0	NO DAMAGE			
175	15	2	0.00015	12.2	13.6	12.3	13.6	0.907	183.1	NO DAMAGE			
175	5	2	0.00015	12.2	13.6	12.3	13.6	0.901	172.4	NO DAMAGE			
175	0	2	0.00015	12.2	13.6	12.2	13.6	0.898	167.4	NO DAMAGE			
175	-15	1	0.00007	12.2	13.6	12.1	13.6	0.889	154.2	NO DAMAGE			
175	-35	1	0.00007	12.2	13.6	11.9	13.6	0.877	139.5	NO DAMAGE			
175	-55	1	0.00007	12.2	13.6	11.8	13.6	0.866	127.4	NO DAMAGE			
175	-65	1	0.00007	12.2	13.6	11.7	13.6	0.860	122.1	NO DAMAGE			
175	-75	1	0.00007	12.2	13.6	11.6	13.6	0.854	117.2	NO DAMAGE			
175	-80	1	0.00007	12.2	13.6	11.6	13.6	0.851	114.9	NO DAMAGE			
175	-85	1	0.00007	12.2	13.6	11.5	13.6	0.848	112.7	NO DAMAGE			
175	-95	3	0.00022	12.2	13.6	11.5	13.6	0.842	108.5	NO DAMAGE			
175	-105	1	0.00007	12.2	13.6	11.4	13.6	0.837	104.6	NO DAMAGE			
175	-115	1	0.00007	12.2	13.6	11.3	13.6	0.831	101.0	NO DAMAGE			
175	-125	1	0.00007	12.2	13.6	11.2	13.6	0.825	97.7	NO DAMAGE			
175	-135	1	0.00007	12.2	13.6	11.1	13.6	0.819	94.5	NO DAMAGE			
175	-145	3	0.00022	12.2	13.6	11.1	13.6	0.813	91.6	NO DAMAGE			
175	-155	1	0.00007	12.2	13.6	11.0	13.6	0.807	88.8	NO DAMAGE			
175	-165	3	0.00022	12.2	13.6	10.9	13.6	0.802	86.2	NO DAMAGE			
175	-185	1	0.00007	12.2	13.6	10.8	13.6	0.790	81.4	NO DAMAGE			
175	-195	3	0.00022	12.2	13.6	10.7	13.6	0.784	79.2	NO DAMAGE			
175	-215	2	0.00015	12.2	13.6	10.5	13.6	0.772	75.1	NO DAMAGE			
175	-225	1	0.00007	12.2	13.6	10.4	13.6	0.767	73.3	NO DAMAGE			
175	-235	1	0.00007	12.2	13.6	10.4	13.6	0.761	71.5	NO DAMAGE			
175	-245	1	0.00007	12.2	13.6	10.3	13.6	0.755	69.8	NO DAMAGE			
175	-255	1	0.00007	12.2	13.6	10.2	13.6	0.749	68.1	NO DAMAGE			
170	160	397	0.02960	12.2	13.6	13.5	13.6	0.994	2921.5	NO DAMAGE			
170	155	85	0.00634	12.2	13.6	13.5	13.6	0.991	1947.7	NO DAMAGE			
170	150	301	0.02244	12.2	13.6	13.4	13.6	0.988	1460.8	NO DAMAGE			
170	145	34	0.00253	12.2	13.6	13.4	13.6	0.985	1168.6	NO DAMAGE			
170	140	140	0.01044	12.2	13.6	13.3	13.6	0.982	973.8	NO DAMAGE			
170	135	10	0.00075	12.2	13.6	13.3	13.6	0.980	834.7	NO DAMAGE			
170	130	30	0.00224	12.2	13.6	13.3	13.6	0.977	730.4	NO DAMAGE			
170	125	4	0.00030	12.2	13.6	13.2	13.6	0.974	649.2	NO DAMAGE			
170	120	11	0.00082	12.2	13.6	13.2	13.6	0.971	584.3	NO DAMAGE			
170	115	2	0.00015	12.2	13.6	13.1	13.6	0.968	531.2	NO DAMAGE			
170	110	8	0.00060	12.2	13.6	13.1	13.6	0.965	466.9	NO DAMAGE			
170	100	7	0.00052	12.2	13.6	13.0	13.6	0.959	417.4	NO DAMAGE			
170	90	9	0.00067	12.2	13.6	12.9	13.6	0.953	365.2	NO DAMAGE			
170	80	7	0.00052	12.2	13.6	12.9	13.6	0.947	324.6	NO DAMAGE			
170	70	3	0.00022	12.2	13.6	12.8	13.6	0.941	292.2	NO DAMAGE			
170	65	1	0.00007	12.2	13.6	12.7	13.6	0.939	278.2	NO DAMAGE			
170	40	1	0.00007	12.2	13.6	12.5	13.6	0.924	224.7	NO DAMAGE			
170	30	3	0.00022	12.2	13.6	12.5	13.6	0.918	208.7	NO DAMAGE			
170	25	1	0.00007	12.2	13.6	12.4	13.6	0.915	201.5	NO DAMAGE			
170	20	3	0.00022	12.2	13.6	12.4	13.6	0.912	194.8	NO DAMAGE			
170	0	2	0.00015	12.2	13.6	12.2	13.6	0.900	171.9	NO DAMAGE			
170	-10	1	0.00007	12.2	13.6	12.1	13.6	0.896	162.3	NO DAMAGE			
170	-40	1	0.00007	12.2	13.6	11.9	13.6	0.877	139.1	NO DAMAGE			
170	-50	1	0.00007	12.2	13.6	11.8	13.6	0.871	132.8	NO DAMAGE			
170	-70	1	0.00007	12.2	13.6	11.7	13.6	0.860	121.7	NO DAMAGE			
170	-90	1	0.00007	12.2	13.6	11.5	13.6	0.848	112.4	NO DAMAGE			
170	-100	2	0.00015	12.2	13.6	11.4	13.6	0.842	108.2	NO DAMAGE			
170	-105	1	0.00007	12.2	13.6	11.4	13.6	0.839	106.2	NO DAMAGE			
170	-110	3	0.00022	12.2	13.6	11.3	13.6	0.836	104.3	NO DAMAGE			
170	-115	1	0.00007	12.2	13.6	11.3	13.6	0.833	102.5	NO DAMAGE			
170	-120	1	0.00007	12.2	13.6	11.3	13.6	0.830	100.7	NO DAMAGE			
170	-130	2	0.00015	12.2	13.6	11.2	13.6	0.824	97.4	NO DAMAGE			
170	-140	2	0.00015	12.2	13.6	11.1	13.6	0.819	94.2	NO DAMAGE			
170	-150	1	0.00007	12.2	13.6	11.0	13.6	0.813	91.3	NO DAMAGE			
170	-160	2	0.00015	12.2	13.6	10.9	13.6	0.807	88.5	NO DAMAGE			
170	-180	1	0.00007	12.2	13.6	10.8	13.6	0.795	83.5	NO DAMAGE			
170	-210	3	0.00022	12.2	13.6	10.6	13.6	0.778	76.9	NO DAMAGE			
170	-230	1	0.00007	12.2	13.6	10.4	13.6	0.766	73.0	NO DAMAGE			
165	155	845	0.06300	12.2	13.5	13.5	13.5	0.994	2913.0	NO DAMAGE			
165	150	95	0.00708	12.2	13.5	13.4	13.5	0.991	1942.0	NO DAMAGE			
165	145	957	0.07135	12.2	13.5	13.4	13.5	0.988	1456.5	NO DAMAGE			
165	140	52	0.00386	12.2	13.5	13.3	13.5	0.985	1165.2	NO DAMAGE			
165	135	293	0.02184	12.2	13.5	13.3	13.5	0.982	971.0	NO DAMAGE			
165	130	13	0.00097	12.2	13.5	13.3	13.5	0.979	832.3	NO DAMAGE			
165	125	39	0.00291	12.2	13.5	13.2	13.5	0.977	728.2	NO DAMAGE			
165	120	6	0.00045	12.2	13.5	13.2	13.5	0.974	647.3	NO DAMAGE			
165	115	12	0.00089	12.2	13.5	13.1	13.5	0.971	582.6	NO DAMAGE			
165	105	4	0.00030	12.2	13.5	13.1	13.5	0.965	485.5	NO DAMAGE			
165	95	1	0.00007	12.2	13.5	13.0	13.5	0.959	416.1	NO DAMAGE			
165	85	3	0.00022	12.2	13.5	12.9	13.5	0.953	364.1	NO DAMAGE			
165	70	1	0.00007	12.2	13.5	12.8	13.5	0.944	306.6	NO DAMAGE			
165	60	1	0.00007	12.2	13.5	12.7	13.5	0.938	277.4	NO DAMAGE			
165	55	1	0.00007	12.2	13.5	12.7	13.5	0.936	264.9	NO DAMAGE			
165	40	1	0.00007	12.2	13.5	12.5	13.5	0.927	233.0	NO DAMAGE			
165	35	2	0.00015	12.2	13.5	12.5	13.5	0.924	224.1	NO DAMAGE			

Max	Min	No.	$\alpha$ Pct	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	$\alpha/N$	cycles per mile Yield stress	153.8 50 ksi
					Max	Min							
165	25	3	0.00022	12.2	13.5	12.4	13.5	0.918	208.1	NO DAMAGE			
165	15	2	0.00015	12.2	13.5	12.3	13.5	0.912	194.2	NO DAMAGE			
165	-5	2	0.00015	12.2	13.5	12.2	13.5	0.900	171.4	NO DAMAGE			
165	-30	1	0.00007	12.2	13.5	12.0	13.5	0.886	149.4	NO DAMAGE			
165	-55	1	0.00007	12.2	13.5	11.8	13.5	0.871	132.4	NO DAMAGE			
165	-105	1	0.00007	12.2	13.5	11.4	13.5	0.842	107.9	NO DAMAGE			
165	-125	1	0.00007	12.2	13.5	11.2	13.5	0.830	100.4	NO DAMAGE			
165	-135	1	0.00007	12.2	13.5	11.1	13.5	0.824	97.1	NO DAMAGE			
165	-140	1	0.00007	12.2	13.5	11.1	13.5	0.821	95.5	NO DAMAGE			
165	-145	1	0.00007	12.2	13.5	11.1	13.5	0.818	94.0	NO DAMAGE			
165	-165	2	0.00015	12.2	13.5	10.9	13.5	0.806	88.3	NO DAMAGE			
165	-185	1	0.00007	12.2	13.5	10.8	13.5	0.795	83.2	NO DAMAGE			
165	-190	1	0.00007	12.2	13.5	10.7	13.5	0.792	82.1	NO DAMAGE			
165	-205	1	0.00007	12.2	13.5	10.6	13.5	0.783	78.7	NO DAMAGE			
165	-215	1	0.00007	12.2	13.5	10.5	13.5	0.777	76.7	NO DAMAGE			
165	-225	2	0.00015	12.2	13.5	10.4	13.5	0.771	74.7	NO DAMAGE			
165	-255	1	0.00007	12.2	13.5	10.2	13.5	0.753	69.4	NO DAMAGE			
165	-275	1	0.00007	12.2	13.5	10.0	13.5	0.742	66.2	NO DAMAGE			
160	150	611	0.04555	12.2	13.5	13.4	13.5	0.994	2904.4	NO DAMAGE			
160	145	158	0.01178	12.2	13.5	13.4	13.5	0.991	1936.3	NO DAMAGE			
160	140	378	0.02818	12.2	13.5	13.3	13.5	0.988	1452.2	NO DAMAGE			
160	135	41	0.00306	12.2	13.5	13.3	13.5	0.985	1161.8	NO DAMAGE			
160	130	113	0.00842	12.2	13.5	13.3	13.5	0.982	968.1	NO DAMAGE			
160	125	20	0.00149	12.2	13.5	13.2	13.5	0.979	829.9	NO DAMAGE			
160	120	53	0.00395	12.2	13.5	13.2	13.5	0.976	726.1	NO DAMAGE			
160	115	2	0.00015	12.2	13.5	13.1	13.5	0.974	645.4	NO DAMAGE			
160	110	24	0.00179	12.2	13.5	13.1	13.5	0.971	580.9	NO DAMAGE			
160	105	4	0.00030	12.2	13.5	13.1	13.5	0.968	528.1	NO DAMAGE			
160	100	12	0.00089	12.2	13.5	13.0	13.5	0.965	484.1	NO DAMAGE			
160	95	3	0.00022	12.2	13.5	13.0	13.5	0.962	446.8	NO DAMAGE			
160	90	10	0.00075	12.2	13.5	12.9	13.5	0.959	414.9	NO DAMAGE			
160	80	4	0.00030	12.2	13.5	12.9	13.5	0.953	363.1	NO DAMAGE			
160	75	1	0.00007	12.2	13.5	12.8	13.5	0.950	341.7	NO DAMAGE			
160	70	3	0.00022	12.2	13.5	12.8	13.5	0.947	322.7	NO DAMAGE			
160	60	4	0.00030	12.2	13.5	12.7	13.5	0.941	290.4	NO DAMAGE			
160	50	2	0.00015	12.2	13.5	12.6	13.5	0.935	264.0	NO DAMAGE			
160	45	1	0.00007	12.2	13.5	12.6	13.5	0.932	252.6	NO DAMAGE			
160	40	3	0.00022	12.2	13.5	12.5	13.5	0.929	242.0	NO DAMAGE			
160	30	5	0.00037	12.2	13.5	12.5	13.5	0.923	223.4	NO DAMAGE			
160	20	2	0.00015	12.2	13.5	12.4	13.5	0.918	207.5	NO DAMAGE			
160	10	2	0.00015	12.2	13.5	12.3	13.5	0.912	193.6	NO DAMAGE			
160	0	5	0.00037	12.2	13.5	12.2	13.5	0.906	181.5	NO DAMAGE			
160	-10	2	0.00015	12.2	13.5	12.1	13.5	0.900	170.8	NO DAMAGE			
160	-15	1	0.00007	12.2	13.5	12.1	13.5	0.897	166.0	NO DAMAGE			
160	-30	1	0.00007	12.2	13.5	12.0	13.5	0.888	152.9	NO DAMAGE			
160	-40	1	0.00007	12.2	13.5	11.9	13.5	0.882	145.2	NO DAMAGE			
160	-70	3	0.00022	12.2	13.5	11.7	13.5	0.865	126.3	NO DAMAGE			
160	-80	2	0.00015	12.2	13.5	11.6	13.5	0.859	121.0	NO DAMAGE			
160	-90	5	0.00037	12.2	13.5	11.5	13.5	0.853	116.2	NO DAMAGE			
160	-100	4	0.00030	12.2	13.5	11.4	13.5	0.847	111.7	NO DAMAGE			
160	-110	6	0.00045	12.2	13.5	11.3	13.5	0.841	107.6	NO DAMAGE			
160	-115	1	0.00007	12.2	13.5	11.3	13.5	0.838	105.6	NO DAMAGE			
160	-120	1	0.00007	12.2	13.5	11.3	13.5	0.835	103.7	NO DAMAGE			
160	-130	3	0.00022	12.2	13.5	11.2	13.5	0.829	100.2	NO DAMAGE			
160	-135	1	0.00007	12.2	13.5	11.1	13.5	0.826	98.5	NO DAMAGE			
160	-140	4	0.00030	12.2	13.5	11.1	13.5	0.823	96.8	NO DAMAGE			
160	-150	1	0.00007	12.2	13.5	11.0	13.5	0.817	93.7	NO DAMAGE			
160	-160	3	0.00022	12.2	13.5	10.9	13.5	0.812	90.8	NO DAMAGE			
160	-170	2	0.00015	12.2	13.5	10.9	13.5	0.806	88.0	NO DAMAGE			
160	-175	1	0.00007	12.2	13.5	10.8	13.5	0.803	86.7	NO DAMAGE			
160	-180	2	0.00015	12.2	13.5	10.8	13.5	0.800	85.4	NO DAMAGE			
160	-185	1	0.00007	12.2	13.5	10.8	13.5	0.797	84.2	NO DAMAGE			
160	-190	1	0.00007	12.2	13.5	10.7	13.5	0.794	83.0	NO DAMAGE			
155	145	1673	0.12473	12.2	13.5	13.4	13.5	0.984	2895.9	NO DAMAGE			
155	140	205	0.01528	12.2	13.5	13.3	13.5	0.991	1930.6	NO DAMAGE			
155	135	1264	0.09423	12.2	13.5	13.3	13.5	0.988	1447.9	NO DAMAGE			
155	130	69	0.00514	12.2	13.5	13.3	13.5	0.985	1158.3	NO DAMAGE			
155	125	323	0.02408	12.2	13.5	13.2	13.5	0.982	965.3	NO DAMAGE			
155	120	17	0.00127	12.2	13.5	13.2	13.5	0.979	827.4	NO DAMAGE			
155	115	108	0.00805	12.2	13.5	13.1	13.5	0.976	724.0	NO DAMAGE			
155	110	5	0.00037	12.2	13.5	13.1	13.5	0.973	643.5	NO DAMAGE			
155	105	15	0.00112	12.2	13.5	13.1	13.5	0.970	579.2	NO DAMAGE			
155	100	1	0.00007	12.2	13.5	13.0	13.5	0.968	526.5	NO DAMAGE			
155	95	15	0.00112	12.2	13.5	13.0	13.5	0.965	462.6	NO DAMAGE			
155	85	2	0.00015	12.2	13.5	12.9	13.5	0.959	413.7	NO DAMAGE			
155	80	1	0.00007	12.2	13.5	12.9	13.5	0.956	386.1	NO DAMAGE			
155	75	6	0.00045	12.2	13.5	12.8	13.5	0.953	362.0	NO DAMAGE			
155	65	3	0.00022	12.2	13.5	12.7	13.5	0.947	321.8	NO DAMAGE			
155	55	1	0.00007	12.2	13.5	12.7	13.5	0.941	289.6	NO DAMAGE			
155	50	2	0.00015	12.2	13.5	12.6	13.5	0.938	275.8	NO DAMAGE			
155	45	2	0.00015	12.2	13.5	12.6	13.5	0.935	263.3	NO DAMAGE			
155	35	2	0.00015	12.2	13.5	12.5	13.5	0.929	241.3	NO DAMAGE			
155	25	3	0.00022	12.2	13.5	12.4	13.5	0.923	222.8	NO DAMAGE			
155	15	2	0.00015	12.2	13.5	12.3	13.5	0.917	206.8	NO DAMAGE			
155	5	3	0.00022	12.2	13.5	12.3	13.5	0.911	193.1	NO DAMAGE			
155	0	3	0.00022	12.2	13.5	12.2	13.5	0.908	186.8	NO DAMAGE			
155	-5	1	0.00007	12.2	13.5	12.2	13.5	0.906	181.0	NO DAMAGE			
155	-15	1	0.00007	12.2	13.5	12.1	13.5	0.900	170.3	NO DAMAGE			

Max	Min	No.	α	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	α/N	cycles per mile Yield stress	153.8 50 ksi
					Max	Min							
155	-25	2	0.00015	12.2	13.5	12.0	13.5	0.894	160.9	NO DAMAGE			
155	-55	1	0.00007	12.2	13.5	11.8	13.5	0.876	137.9	NO DAMAGE			
155	-80	1	0.00007	12.2	13.5	11.6	13.5	0.861	123.2	NO DAMAGE			
155	-95	1	0.00007	12.2	13.5	11.5	13.5	0.852	115.8	NO DAMAGE			
155	-105	1	0.00007	12.2	13.5	11.4	13.5	0.846	111.4	NO DAMAGE			
155	-115	1	0.00007	12.2	13.5	11.3	13.5	0.841	107.3	NO DAMAGE			
155	-120	1	0.00007	12.2	13.5	11.3	13.5	0.838	105.3	NO DAMAGE			
155	-125	2	0.00015	12.2	13.5	11.2	13.5	0.835	103.4	NO DAMAGE			
155	-130	1	0.00007	12.2	13.5	11.2	13.5	0.832	101.6	NO DAMAGE			
155	-135	5	0.00037	12.2	13.5	11.1	13.5	0.829	99.9	NO DAMAGE			
155	-145	4	0.00030	12.2	13.5	11.1	13.5	0.823	96.5	NO DAMAGE			
155	-150	2	0.00015	12.2	13.5	11.0	13.5	0.820	94.9	NO DAMAGE			
155	-165	1	0.00007	12.2	13.5	10.9	13.5	0.811	90.5	NO DAMAGE			
155	-175	1	0.00007	12.2	13.5	10.8	13.5	0.805	87.8	NO DAMAGE			
155	-185	2	0.00015	12.2	13.5	10.8	13.5	0.799	85.2	NO DAMAGE			
155	-195	1	0.00007	12.2	13.5	10.7	13.5	0.793	82.7	NO DAMAGE			
155	-220	1	0.00007	12.2	13.5	10.5	13.5	0.779	77.2	NO DAMAGE			
155	-235	1	0.00007	12.2	13.5	10.4	13.5	0.770	74.3	NO DAMAGE			
150	140	773	0.05763	12.2	13.4	13.3	13.4	0.994	2887.3	NO DAMAGE			
150	135	220	0.01640	12.2	13.4	13.3	13.4	0.991	1924.9	NO DAMAGE			
150	130	550	0.04100	12.2	13.4	13.3	13.4	0.988	1443.7	NO DAMAGE			
150	125	117	0.00872	12.2	13.4	13.2	13.4	0.985	1154.9	NO DAMAGE			
150	120	210	0.01566	12.2	13.4	13.2	13.4	0.982	962.4	NO DAMAGE			
150	115	22	0.00164	12.2	13.4	13.1	13.4	0.979	824.9	NO DAMAGE			
150	110	108	0.00895	12.2	13.4	13.1	13.4	0.976	721.8	NO DAMAGE			
150	105	4	0.00030	12.2	13.4	13.1	13.4	0.973	641.6	NO DAMAGE			
150	100	48	0.00358	12.2	13.4	13.0	13.4	0.970	577.5	NO DAMAGE			
150	95	3	0.00022	12.2	13.4	13.0	13.4	0.967	525.0	NO DAMAGE			
150	90	21	0.00157	12.2	13.4	12.9	13.4	0.964	481.2	NO DAMAGE			
150	85	2	0.00015	12.2	13.4	12.9	13.4	0.962	444.2	NO DAMAGE			
150	80	7	0.00052	12.2	13.4	12.9	13.4	0.959	412.5	NO DAMAGE			
150	70	12	0.00089	12.2	13.4	12.8	13.4	0.953	360.9	NO DAMAGE			
150	65	1	0.00007	12.2	13.4	12.7	13.4	0.950	339.7	NO DAMAGE			
150	60	6	0.00045	12.2	13.4	12.7	13.4	0.947	320.8	NO DAMAGE			
150	50	6	0.00045	12.2	13.4	12.6	13.4	0.941	288.7	NO DAMAGE			
150	45	1	0.00007	12.2	13.4	12.6	13.4	0.938	275.0	NO DAMAGE			
150	40	2	0.00015	12.2	13.4	12.5	13.4	0.935	262.5	NO DAMAGE			
150	30	3	0.00022	12.2	13.4	12.5	13.4	0.929	240.6	NO DAMAGE			
150	20	6	0.00045	12.2	13.4	12.4	13.4	0.923	222.1	NO DAMAGE			
150	10	7	0.00052	12.2	13.4	12.3	13.4	0.917	206.2	NO DAMAGE			
150	5	1	0.00007	12.2	13.4	12.3	13.4	0.914	199.1	NO DAMAGE			
150	0	6	0.00045	12.2	13.4	12.2	13.4	0.911	192.5	NO DAMAGE			
150	-10	8	0.00060	12.2	13.4	12.1	13.4	0.905	180.5	NO DAMAGE			
150	-20	1	0.00007	12.2	13.4	12.1	13.4	0.899	169.8	NO DAMAGE			
150	-25	1	0.00007	12.2	13.4	12.0	13.4	0.896	165.0	NO DAMAGE			
150	-30	1	0.00007	12.2	13.4	12.0	13.4	0.893	160.4	NO DAMAGE			
150	-40	2	0.00015	12.2	13.4	11.9	13.4	0.887	152.0	NO DAMAGE			
150	-50	1	0.00007	12.2	13.4	11.8	13.4	0.882	144.4	NO DAMAGE			
150	-60	3	0.00022	12.2	13.4	11.7	13.4	0.876	137.5	NO DAMAGE			
150	-70	2	0.00015	12.2	13.4	11.7	13.4	0.870	131.2	NO DAMAGE			
150	-80	4	0.00030	12.2	13.4	11.6	13.4	0.864	125.5	NO DAMAGE			
150	-100	3	0.00022	12.2	13.4	11.4	13.4	0.852	115.5	NO DAMAGE			
150	-105	1	0.00007	12.2	13.4	11.4	13.4	0.849	113.2	NO DAMAGE			
150	-110	5	0.00037	12.2	13.4	11.3	13.4	0.846	111.1	NO DAMAGE			
150	-115	1	0.00007	12.2	13.4	11.3	13.4	0.843	109.0	NO DAMAGE			
150	-120	4	0.00030	12.2	13.4	11.3	13.4	0.840	106.9	NO DAMAGE			
150	-125	2	0.00015	12.2	13.4	11.2	13.4	0.837	105.0	NO DAMAGE			
150	-130	3	0.00022	12.2	13.4	11.2	13.4	0.834	103.1	NO DAMAGE			
150	-135	1	0.00007	12.2	13.4	11.1	13.4	0.831	101.3	NO DAMAGE			
150	-140	3	0.00022	12.2	13.4	11.1	13.4	0.828	99.6	NO DAMAGE			
150	-150	2	0.00015	12.2	13.4	11.0	13.4	0.822	96.2	NO DAMAGE			
150	-160	1	0.00007	12.2	13.4	10.9	13.4	0.816	93.1	NO DAMAGE			
150	-165	1	0.00007	12.2	13.4	10.9	13.4	0.813	91.7	NO DAMAGE			
150	-170	1	0.00007	12.2	13.4	10.9	13.4	0.810	90.2	NO DAMAGE			
150	-180	1	0.00007	12.2	13.4	10.8	13.4	0.805	87.5	NO DAMAGE			
150	-220	1	0.00007	12.2	13.4	10.5	13.4	0.781	78.0	NO DAMAGE			
150	-230	1	0.00007	12.2	13.4	10.4	13.4	0.775	76.0	NO DAMAGE			
145	135	2125	0.15842	12.2	13.4	13.3	13.4	0.994	2878.8	NO DAMAGE			
145	130	317	0.02363	12.2	13.4	13.3	13.4	0.991	1919.2	NO DAMAGE			
145	125	1702	0.12689	12.2	13.4	13.2	13.4	0.988	1439.4	NO DAMAGE			
145	120	76	0.00567	12.2	13.4	13.2	13.4	0.985	1151.5	NO DAMAGE			
145	115	343	0.02557	12.2	13.4	13.1	13.4	0.982	959.6	NO DAMAGE			
145	110	20	0.00149	12.2	13.4	13.1	13.4	0.979	822.5	NO DAMAGE			
145	105	62	0.00462	12.2	13.4	13.1	13.4	0.976	719.7	NO DAMAGE			
145	100	9	0.00067	12.2	13.4	13.0	13.4	0.973	639.7	NO DAMAGE			
145	95	17	0.00127	12.2	13.4	13.0	13.4	0.970	575.8	NO DAMAGE			
145	90	2	0.00015	12.2	13.4	12.9	13.4	0.967	523.4	NO DAMAGE			
145	85	10	0.00075	12.2	13.4	12.9	13.4	0.964	479.8	NO DAMAGE			
145	75	4	0.00030	12.2	13.4	12.8	13.4	0.958	411.3	NO DAMAGE			
145	70	1	0.00007	12.2	13.4	12.8	13.4	0.955	383.8	NO DAMAGE			
145	65	2	0.00015	12.2	13.4	12.7	13.4	0.952	359.8	NO DAMAGE			
145	55	6	0.00045	12.2	13.4	12.7	13.4	0.947	319.9	NO DAMAGE			
145	45	6	0.00045	12.2	13.4	12.6	13.4	0.941	287.9	NO DAMAGE			
145	35	3	0.00022	12.2	13.4	12.5	13.4	0.935	261.7	NO DAMAGE			
145	30	1	0.00007	12.2	13.4	12.5	13.4	0.932	250.3	NO DAMAGE			
145	25	3	0.00022	12.2	13.4	12.4	13.4	0.929	239.9	NO DAMAGE			
145	20	2	0.00015	12.2	13.4	12.4	13.4	0.926	230.3	NO DAMAGE			
145	15	4	0.00030	12.2	13.4	12.3	13.4	0.923	221.4	NO DAMAGE			

Max	Min	No.	$\alpha$ Pct	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	$\alpha/N$	cycles per mile Yield stress	153.8 50 ksi
					Max	Min							
145	10	1	0.00007	12.2	13.4	12.3	13.4	0.920	213.2				
145	5	4	0.00030	12.2	13.4	12.3	13.4	0.917	205.6				
145	0	1	0.00007	12.2	13.4	12.2	13.4	0.914	198.5				
145	-5	3	0.00022	12.2	13.4	12.2	13.4	0.911	191.9				
145	-35	2	0.00015	12.2	13.4	11.9	13.4	0.893	159.9				
145	-75	1	0.00007	12.2	13.4	11.6	13.4	0.869	130.9				
145	-85	1	0.00007	12.2	13.4	11.5	13.4	0.863	125.2				
145	-95	3	0.00022	12.2	13.4	11.5	13.4	0.857	119.9				
145	-100	1	0.00007	12.2	13.4	11.4	13.4	0.854	117.5				
145	-105	1	0.00007	12.2	13.4	11.4	13.4	0.851	115.2				
145	-115	3	0.00022	12.2	13.4	11.3	13.4	0.846	110.7				
145	-135	3	0.00022	12.2	13.4	11.1	13.4	0.834	102.8				
145	-145	3	0.00022	12.2	13.4	11.1	13.4	0.828	99.3				
145	-155	1	0.00007	12.2	13.4	11.0	13.4	0.822	96.0				
145	-165	3	0.00022	12.2	13.4	10.9	13.4	0.816	92.9				
145	-185	1	0.00007	12.2	13.4	10.8	13.4	0.804	87.2				
145	-195	2	0.00015	12.2	13.4	10.7	13.4	0.798	84.7				
145	-215	2	0.00015	12.2	13.4	10.5	13.4	0.786	80.0				
145	-265	1	0.00007	12.2	13.4	10.1	13.4	0.756	70.2				
140	130	1518	0.11317	12.2	13.3	13.3	13.3	0.994	2870.2				
140	125	298	0.02222	12.2	13.3	13.2	13.3	0.991	1913.5				
140	120	667	0.04973	12.2	13.3	13.2	13.3	0.988	1435.1				
140	115	88	0.00656	12.2	13.3	13.1	13.3	0.985	1148.1				
140	110	316	0.02356	12.2	13.3	13.1	13.3	0.982	956.7				
140	105	35	0.00261	12.2	13.3	13.1	13.3	0.979	820.1				
140	100	185	0.01379	12.2	13.3	13.0	13.3	0.976	717.6				
140	95	18	0.00134	12.2	13.3	13.0	13.3	0.973	637.8				
140	90	67	0.00500	12.2	13.3	12.9	13.3	0.970	574.0				
140	85	3	0.00022	12.2	13.3	12.9	13.3	0.967	521.9				
140	80	41	0.00306	12.2	13.3	12.9	13.3	0.964	478.4				
140	75	5	0.00037	12.2	13.3	12.8	13.3	0.961	441.6				
140	70	30	0.00224	12.2	13.3	12.8	13.3	0.958	410.0				
140	65	2	0.00015	12.2	13.3	12.7	13.3	0.955	362.7				
140	60	13	0.00097	12.2	13.3	12.7	13.3	0.952	358.8				
140	55	1	0.00007	12.2	13.3	12.7	13.3	0.949	337.7				
140	50	5	0.00037	12.2	13.3	12.6	13.3	0.946	318.9				
140	45	3	0.00022	12.2	13.3	12.6	13.3	0.943	302.1				
140	40	12	0.00089	12.2	13.3	12.5	13.3	0.940	287.0				
140	35	1	0.00007	12.2	13.3	12.5	13.3	0.937	273.4				
140	30	7	0.00052	12.2	13.3	12.5	13.3	0.934	260.9				
140	20	8	0.00060	12.2	13.3	12.4	13.3	0.929	239.2				
140	10	7	0.00052	12.2	13.3	12.3	13.3	0.923	220.8				
140	5	1	0.00007	12.2	13.3	12.3	13.3	0.920	212.6				
140	0	10	0.00075	12.2	13.3	12.2	13.3	0.917	205.0				
140	-5	1	0.00007	12.2	13.3	12.2	13.3	0.914	197.9				
140	-10	9	0.00067	12.2	13.3	12.1	13.3	0.911	191.3				
140	-20	3	0.00022	12.2	13.3	12.1	13.3	0.905	179.4				
140	-25	1	0.00007	12.2	13.3	12.0	13.3	0.902	174.0				
140	-30	2	0.00015	12.2	13.3	12.0	13.3	0.899	168.8				
140	-40	3	0.00022	12.2	13.3	11.9	13.3	0.893	159.5				
140	-50	3	0.00022	12.2	13.3	11.8	13.3	0.887	151.1				
140	-60	2	0.00015	12.2	13.3	11.7	13.3	0.881	143.5				
140	-70	3	0.00022	12.2	13.3	11.7	13.3	0.875	136.7				
140	-80	5	0.00037	12.2	13.3	11.6	13.3	0.869	130.5				
140	-90	6	0.00037	12.2	13.3	11.5	13.3	0.863	124.8				
140	-95	1	0.00007	12.2	13.3	11.5	13.3	0.860	122.1				
140	-100	9	0.00067	12.2	13.3	11.4	13.3	0.857	119.6				
140	-110	4	0.00030	12.2	13.3	11.3	13.3	0.851	114.8				
140	-115	1	0.00007	12.2	13.3	11.3	13.3	0.848	112.6				
140	-120	7	0.00052	12.2	13.3	11.3	13.3	0.845	110.4				
140	-130	2	0.00015	12.2	13.3	11.2	13.3	0.839	106.3				
140	-140	5	0.00037	12.2	13.3	11.1	13.3	0.833	102.5				
140	-145	2	0.00015	12.2	13.3	11.1	13.3	0.830	100.7				
140	-150	2	0.00015	12.2	13.3	11.0	13.3	0.827	99.0				
140	-155	1	0.00007	12.2	13.3	11.0	13.3	0.824	97.3				
140	-160	1	0.00007	12.2	13.3	10.9	13.3	0.821	95.7				
140	-170	2	0.00015	12.2	13.3	10.9	13.3	0.815	92.6				
140	-190	1	0.00007	12.2	13.3	10.7	13.3	0.803	87.0				
140	-200	1	0.00007	12.2	13.3	10.6	13.3	0.797	84.4				
140	-210	1	0.00007	12.2	13.3	10.6	13.3	0.791	82.0				
140	-260	1	0.00007	12.2	13.3	10.2	13.3	0.762	71.8				
135	125	2305	0.17184	12.2	13.3	13.2	13.3	0.994	2861.7				
135	120	236	0.01759	12.2	13.3	13.2	13.3	0.991	1907.8				
135	115	1901	0.14172	12.2	13.3	13.1	13.3	0.988	1430.8				
135	110	117	0.00872	12.2	13.3	13.1	13.3	0.985	1144.7				
135	105	42	0.03519	12.2	13.3	13.1	13.3	0.982	953.9				
135	100	55	0.00410	12.2	13.3	13.0	13.3	0.979	817.6				
135	95	122	0.00910	12.2	13.3	13.0	13.3	0.976	715.4				
135	90	11	0.00082	12.2	13.3	12.9	13.3	0.973	635.9				
135	85	59	0.00440	12.2	13.3	12.9	13.3	0.970	572.3				
135	80	6	0.00045	12.2	13.3	12.9	13.3	0.967	520.3				
135	75	28	0.00209	12.2	13.3	12.8	13.3	0.964	476.9				
135	70	2	0.00015	12.2	13.3	12.8	13.3	0.961	440.3				
135	65	11	0.00082	12.2	13.3	12.7	13.3	0.958	408.8				
135	60	1	0.00007	12.2	13.3	12.7	13.3	0.955	361.6				
135	55	11	0.00082	12.2	13.3	12.7	13.3	0.952	357.7				
135	50	2	0.00015	12.2	13.3	12.6	13.3	0.949	336.7				
135	45	6	0.00045	12.2	13.3	12.6	13.3	0.946	318.0				

Max	Min	No.	$\alpha$ Pct	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	$\alpha/N$	cycles per mile Yield stress	153.8 ksi
					Max	Min							
135	35	3	0.00022	12.2	13.3	12.5	13.3	0.940	286.2	NO DAMAGE			
135	30	1	0.00007	12.2	13.3	12.5	13.3	0.937	272.5	NO DAMAGE			
135	25	6	0.00045	12.2	13.3	12.4	13.3	0.934	260.2	NO DAMAGE			
135	20	1	0.00007	12.2	13.3	12.4	13.3	0.931	248.8	NO DAMAGE			
135	15	5	0.00037	12.2	13.3	12.3	13.3	0.928	238.5	NO DAMAGE			
135	5	11	0.00062	12.2	13.3	12.3	13.3	0.922	220.1	NO DAMAGE			
135	0	4	0.00030	12.2	13.3	12.2	13.3	0.919	212.0	NO DAMAGE			
135	-5	1	0.00007	12.2	13.3	12.2	13.3	0.916	204.4	NO DAMAGE			
135	-15	1	0.00007	12.2	13.3	12.1	13.3	0.910	190.8	NO DAMAGE			
135	-35	1	0.00007	12.2	13.3	11.9	13.3	0.898	168.3	NO DAMAGE			
135	-40	1	0.00007	12.2	13.3	11.9	13.3	0.895	163.5	NO DAMAGE			
135	-45	3	0.00022	12.2	13.3	11.9	13.3	0.892	159.0	NO DAMAGE			
135	-65	1	0.00007	12.2	13.3	11.7	13.3	0.880	143.1	NO DAMAGE			
135	-95	2	0.00015	12.2	13.3	11.5	13.3	0.869	130.1	NO DAMAGE			
135	-95	1	0.00007	12.2	13.3	11.5	13.3	0.863	124.4	NO DAMAGE			
135	-100	1	0.00007	12.2	13.3	11.4	13.3	0.860	121.8	NO DAMAGE			
135	-105	4	0.00030	12.2	13.3	11.4	13.3	0.857	119.2	NO DAMAGE			
135	-115	3	0.00022	12.2	13.3	11.3	13.3	0.851	114.5	NO DAMAGE			
135	-125	6	0.00045	12.2	13.3	11.2	13.3	0.845	110.1	NO DAMAGE			
135	-135	4	0.00030	12.2	13.3	11.1	13.3	0.839	106.0	NO DAMAGE			
135	-145	3	0.00022	12.2	13.3	11.1	13.3	0.833	102.2	NO DAMAGE			
135	-155	3	0.00022	12.2	13.3	11.0	13.3	0.827	98.7	NO DAMAGE			
135	-180	2	0.00015	12.2	13.3	10.9	13.3	0.824	97.0	NO DAMAGE			
135	-185	2	0.00015	12.2	13.3	10.9	13.3	0.821	95.4	NO DAMAGE			
135	-175	2	0.00015	12.2	13.3	10.8	13.3	0.815	92.3	NO DAMAGE			
135	-185	2	0.00015	12.2	13.3	10.8	13.3	0.809	89.4	NO DAMAGE			
135	-195	2	0.00015	12.2	13.3	10.7	13.3	0.803	86.7	NO DAMAGE			
135	-205	1	0.00007	12.2	13.3	10.6	13.3	0.797	84.2	NO DAMAGE			
135	-235	1	0.00007	12.2	13.3	10.4	13.3	0.779	77.3	NO DAMAGE			
130	120	1350	0.10065	12.2	13.3	13.2	13.3	0.994	2853.1	NO DAMAGE			
130	115	357	0.02662	12.2	13.3	13.1	13.3	0.991	1902.1	NO DAMAGE			
130	110	1062	0.07918	12.2	13.3	13.1	13.3	0.988	1426.6	NO DAMAGE			
130	105	197	0.01469	12.2	13.3	13.1	13.3	0.985	1141.2	NO DAMAGE			
130	100	540	0.04026	12.2	13.3	13.0	13.3	0.982	951.0	NO DAMAGE			
130	95	69	0.00514	12.2	13.3	13.0	13.3	0.979	815.2	NO DAMAGE			
130	90	301	0.02244	12.2	13.3	12.9	13.3	0.976	713.3	NO DAMAGE			
130	85	20	0.00149	12.2	13.3	12.9	13.3	0.973	634.0	NO DAMAGE			
130	80	166	0.01238	12.2	13.3	12.9	13.3	0.970	570.6	NO DAMAGE			
130	75	15	0.00112	12.2	13.3	12.8	13.3	0.967	518.7	NO DAMAGE			
130	70	66	0.00492	12.2	13.3	12.8	13.3	0.964	475.5	NO DAMAGE			
130	65	7	0.00052	12.2	13.3	12.7	13.3	0.961	438.9	NO DAMAGE			
130	60	35	0.00261	12.2	13.3	12.7	13.3	0.958	407.6	NO DAMAGE			
130	55	6	0.00045	12.2	13.3	12.7	13.3	0.955	380.4	NO DAMAGE			
130	50	34	0.00253	12.2	13.3	12.6	13.3	0.952	359.6	NO DAMAGE			
130	45	2	0.00015	12.2	13.3	12.6	13.3	0.949	335.7	NO DAMAGE			
130	40	12	0.00089	12.2	13.3	12.5	13.3	0.946	317.0	NO DAMAGE			
130	35	1	0.00007	12.2	13.3	12.5	13.3	0.943	300.3	NO DAMAGE			
130	30	6	0.00045	12.2	13.3	12.5	13.3	0.940	285.3	NO DAMAGE			
130	25	1	0.00007	12.2	13.3	12.4	13.3	0.937	271.7	NO DAMAGE			
130	20	10	0.00075	12.2	13.3	12.4	13.3	0.934	259.4	NO DAMAGE			
130	10	11	0.00082	12.2	13.3	12.3	13.3	0.928	237.8	NO DAMAGE			
130	0	11	0.00082	12.2	13.3	12.2	13.3	0.922	219.5	NO DAMAGE			
130	-5	2	0.00015	12.2	13.3	12.2	13.3	0.919	211.3	NO DAMAGE			
130	-10	8	0.00060	12.2	13.3	12.1	13.3	0.916	203.8	NO DAMAGE			
130	-20	1	0.00007	12.2	13.3	12.1	13.3	0.910	190.2	NO DAMAGE			
130	-30	5	0.00037	12.2	13.3	12.0	13.3	0.904	178.3	NO DAMAGE			
130	-35	1	0.00007	12.2	13.3	11.9	13.3	0.901	172.9	NO DAMAGE			
130	-40	2	0.00015	12.2	13.3	11.9	13.3	0.898	167.8	NO DAMAGE			
130	-50	2	0.00015	12.2	13.3	11.8	13.3	0.892	158.5	NO DAMAGE			
130	-60	8	0.00060	12.2	13.3	11.7	13.3	0.886	150.2	NO DAMAGE			
130	-70	5	0.00037	12.2	13.3	11.7	13.3	0.880	142.7	NO DAMAGE			
130	-80	4	0.00030	12.2	13.3	11.6	13.3	0.874	135.9	NO DAMAGE			
130	-90	6	0.00045	12.2	13.3	11.5	13.3	0.868	129.7	NO DAMAGE			
130	-100	4	0.00030	12.2	13.3	11.4	13.3	0.862	124.0	NO DAMAGE			
130	-110	5	0.00037	12.2	13.3	11.3	13.3	0.856	118.9	NO DAMAGE			
130	-120	2	0.00015	12.2	13.3	11.3	13.3	0.850	114.1	NO DAMAGE			
130	-130	2	0.00015	12.2	13.3	11.2	13.3	0.844	109.7	NO DAMAGE			
130	-140	1	0.00007	12.2	13.3	11.1	13.3	0.838	105.7	NO DAMAGE			
130	-150	1	0.00007	12.2	13.3	11.0	13.3	0.832	101.9	NO DAMAGE			
130	-160	3	0.00022	12.2	13.3	10.9	13.3	0.826	98.4	NO DAMAGE			
130	-170	1	0.00007	12.2	13.3	10.9	13.3	0.820	95.1	NO DAMAGE			
130	-205	1	0.00007	12.2	13.3	10.6	13.3	0.799	85.2	NO DAMAGE			
130	-215	1	0.00007	12.2	13.3	10.5	13.3	0.793	82.7	NO DAMAGE			
130	-220	1	0.00007	12.2	13.3	10.5	13.3	0.790	81.5	NO DAMAGE			
125	115	3294	0.24558	12.2	13.2	13.1	13.2	0.994	2844.6	NO DAMAGE			
125	110	660	0.04920	12.2	13.2	13.1	13.2	0.991	1896.4	NO DAMAGE			
125	105	2822	0.21039	12.2	13.2	13.1	13.2	0.988	1422.3	NO DAMAGE			
125	100	259	0.01931	12.2	13.2	13.0	13.2	0.985	1137.8	NO DAMAGE			
125	95	752	0.05606	12.2	13.2	13.0	13.2	0.982	948.2	NO DAMAGE			
125	90	87	0.00649	12.2	13.2	12.9	13.2	0.979	812.7	NO DAMAGE			
125	85	266	0.01983	12.2	13.2	12.9	13.2	0.976	711.1	NO DAMAGE			
125	80	34	0.00253	12.2	13.2	12.9	13.2	0.973	632.1	NO DAMAGE			
125	75	137	0.01021	12.2	13.2	12.8	13.2	0.970	568.9	NO DAMAGE			
125	70	14	0.00104	12.2	13.2	12.8	13.2	0.967	517.2	NO DAMAGE			
125	65	37	0.00649	12.2	13.2	12.7	13.2	0.964	474.1	NO DAMAGE			
125	60	9	0.00067	12.2	13.2	12.7	13.2	0.961	437.6	NO DAMAGE			
125	55	39	0.00291	12.2	13.2	12.7	13.2	0.958	406.4	NO DAMAGE			
125	50	2	0.00015	12.2	13.2	12.6	13.2	0.955	379.3	NO DAMAGE			

Max	Min	No.	α Pct	Static Stress	Dynamic Stress			R Min/Max	Endurance Limit	to Failure N	α/N	cycles per mile Yield stress	153.8 ksi
					Max	Min	Adjusted						
125	45	22	0.00164	12.2	13.2	12.6	13.2	0.952	355.6	NO DAMAGE			
125	40	4	0.00030	12.2	13.2	12.5	13.2	0.949	334.7	NO DAMAGE			
125	35	8	0.00060	12.2	13.2	12.5	13.2	0.946	316.1	NO DAMAGE			
125	25	6	0.00045	12.2	13.2	12.4	13.2	0.940	284.5	NO DAMAGE			
125	15	8	0.00060	12.2	13.2	12.3	13.2	0.934	258.6	NO DAMAGE			
125	5	14	0.00104	12.2	13.2	12.3	13.2	0.928	237.0	NO DAMAGE			
125	0	4	0.00030	12.2	13.2	12.2	13.2	0.925	227.6	NO DAMAGE			
125	-5	5	0.00037	12.2	13.2	12.2	13.2	0.922	218.8	NO DAMAGE			
125	-15	1	0.00007	12.2	13.2	12.1	13.2	0.916	203.2	NO DAMAGE			
125	-20	1	0.00007	12.2	13.2	12.1	13.2	0.913	196.2	NO DAMAGE			
125	-25	1	0.00007	12.2	13.2	12.0	13.2	0.910	189.6	NO DAMAGE			
125	-35	1	0.00007	12.2	13.2	11.9	13.2	0.904	177.8	NO DAMAGE			
125	-55	3	0.00022	12.2	13.2	11.8	13.2	0.892	158.0	NO DAMAGE			
125	-65	1	0.00007	12.2	13.2	11.7	13.2	0.886	149.7	NO DAMAGE			
125	-75	2	0.00015	12.2	13.2	11.6	13.2	0.880	142.2	NO DAMAGE			
125	-85	3	0.00022	12.2	13.2	11.5	13.2	0.874	135.5	NO DAMAGE			
125	-95	7	0.00052	12.2	13.2	11.5	13.2	0.868	129.3	NO DAMAGE			
125	-100	3	0.00022	12.2	13.2	11.4	13.2	0.865	126.4	NO DAMAGE			
125	-105	3	0.00022	12.2	13.2	11.4	13.2	0.862	123.7	NO DAMAGE			
125	-115	3	0.00022	12.2	13.2	11.3	13.2	0.856	118.5	NO DAMAGE			
125	-120	2	0.00015	12.2	13.2	11.3	13.2	0.853	116.1	NO DAMAGE			
125	-125	3	0.00022	12.2	13.2	11.2	13.2	0.850	113.8	NO DAMAGE			
125	-135	1	0.00007	12.2	13.2	11.1	13.2	0.844	109.4	NO DAMAGE			
125	-145	1	0.00007	12.2	13.2	11.1	13.2	0.838	105.4	NO DAMAGE			
125	-155	1	0.00007	12.2	13.2	11.0	13.2	0.832	101.6	NO DAMAGE			
125	-165	2	0.00015	12.2	13.2	10.9	13.2	0.826	98.1	NO DAMAGE			
125	-190	1	0.00007	12.2	13.2	10.7	13.2	0.811	90.3	NO DAMAGE			
125	-205	3	0.00022	12.2	13.2	10.6	13.2	0.802	86.2	NO DAMAGE			
125	-225	2	0.00015	12.2	13.2	10.4	13.2	0.790	81.3	NO DAMAGE			
120	110	2455	0.18303	12.2	13.2	13.1	13.2	0.994	2836.0	NO DAMAGE			
120	105	678	0.05055	12.2	13.2	13.1	13.2	0.991	1890.7	NO DAMAGE			
120	100	1649	0.12294	12.2	13.2	13.0	13.2	0.988	1418.0	NO DAMAGE			
120	95	334	0.02490	12.2	13.2	13.0	13.2	0.985	1134.4	NO DAMAGE			
120	90	851	0.06344	12.2	13.2	12.9	13.2	0.982	945.3	NO DAMAGE			
120	85	101	0.00753	12.2	13.2	12.9	13.2	0.979	810.3	NO DAMAGE			
120	80	398	0.02967	12.2	13.2	12.9	13.2	0.976	709.0	NO DAMAGE			
120	75	38	0.00283	12.2	13.2	12.8	13.2	0.973	630.2	NO DAMAGE			
120	70	202	0.01506	12.2	13.2	12.8	13.2	0.970	567.2	NO DAMAGE			
120	65	15	0.00112	12.2	13.2	12.7	13.2	0.967	515.6	NO DAMAGE			
120	60	115	0.00857	12.2	13.2	12.7	13.2	0.964	472.7	NO DAMAGE			
120	55	12	0.00089	12.2	13.2	12.7	13.2	0.961	436.3	NO DAMAGE			
120	50	63	0.00470	12.2	13.2	12.6	13.2	0.958	405.1	NO DAMAGE			
120	45	2	0.00015	12.2	13.2	12.6	13.2	0.955	378.1	NO DAMAGE			
120	40	37	0.00276	12.2	13.2	12.5	13.2	0.952	354.5	NO DAMAGE			
120	35	3	0.00022	12.2	13.2	12.5	13.2	0.949	333.6	NO DAMAGE			
120	30	27	0.00201	12.2	13.2	12.5	13.2	0.946	315.1	NO DAMAGE			
120	25	3	0.00022	12.2	13.2	12.4	13.2	0.943	298.5	NO DAMAGE			
120	20	15	0.00112	12.2	13.2	12.4	13.2	0.940	283.6	NO DAMAGE			
120	15	1	0.00007	12.2	13.2	12.3	13.2	0.937	270.1	NO DAMAGE			
120	10	13	0.00097	12.2	13.2	12.3	13.2	0.934	257.8	NO DAMAGE			
120	5	5	0.00037	12.2	13.2	12.3	13.2	0.931	246.6	NO DAMAGE			
120	0	23	0.00171	12.2	13.2	12.2	13.2	0.928	236.3	NO DAMAGE			
120	-5	4	0.00030	12.2	13.2	12.2	13.2	0.925	226.9	NO DAMAGE			
120	-10	19	0.00142	12.2	13.2	12.1	13.2	0.922	218.2	NO DAMAGE			
120	-20	3	0.00022	12.2	13.2	12.1	13.2	0.916	202.6	NO DAMAGE			
120	-30	7	0.00052	12.2	13.2	12.0	13.2	0.910	189.1	NO DAMAGE			
120	-40	1	0.00007	12.2	13.2	11.9	13.2	0.904	177.3	NO DAMAGE			
120	-45	1	0.00007	12.2	13.2	11.9	13.2	0.901	171.9	NO DAMAGE			
120	-50	6	0.00045	12.2	13.2	11.8	13.2	0.897	166.8	NO DAMAGE			
120	-55	1	0.00007	12.2	13.2	11.8	13.2	0.894	162.1	NO DAMAGE			
120	-60	3	0.00022	12.2	13.2	11.7	13.2	0.891	157.6	NO DAMAGE			
120	-70	9	0.00067	12.2	13.2	11.7	13.2	0.885	149.3	NO DAMAGE			
120	-80	5	0.00037	12.2	13.2	11.6	13.2	0.879	141.8	NO DAMAGE			
120	-85	1	0.00007	12.2	13.2	11.5	13.2	0.876	138.3	NO DAMAGE			
120	-90	8	0.00060	12.2	13.2	11.5	13.2	0.873	135.0	NO DAMAGE			
120	-100	6	0.00045	12.2	13.2	11.4	13.2	0.867	128.9	NO DAMAGE			
120	-110	7	0.00052	12.2	13.2	11.3	13.2	0.861	123.3	NO DAMAGE			
120	-115	1	0.00007	12.2	13.2	11.3	13.2	0.858	120.7	NO DAMAGE			
120	-120	3	0.00022	12.2	13.2	11.3	13.2	0.855	118.2	NO DAMAGE			
120	-130	2	0.00015	12.2	13.2	11.2	13.2	0.849	113.4	NO DAMAGE			
120	-135	1	0.00007	12.2	13.2	11.1	13.2	0.846	111.2	NO DAMAGE			
120	-140	5	0.00037	12.2	13.2	11.1	13.2	0.843	109.1	NO DAMAGE			
120	-145	1	0.00007	12.2	13.2	11.1	13.2	0.840	107.0	NO DAMAGE			
120	-150	2	0.00015	12.2	13.2	11.0	13.2	0.837	105.0	NO DAMAGE			
120	-155	1	0.00007	12.2	13.2	11.0	13.2	0.834	103.1	NO DAMAGE			
120	-180	2	0.00015	12.2	13.2	10.9	13.2	0.831	101.3	NO DAMAGE			
120	-180	2	0.00015	12.2	13.2	10.8	13.2	0.819	94.5	NO DAMAGE			
120	-235	1	0.00007	12.2	13.2	10.4	13.2	0.786	79.9	NO DAMAGE			
115	105	4703	0.35062	12.2	13.1	13.1	13.1	0.994	2827.5	NO DAMAGE			
115	100	908	0.06769	12.2	13.1	13.0	13.1	0.991	1885.0	NO DAMAGE			
115	95	3914	0.29180	12.2	13.1	13.0	13.1	0.988	1413.7	NO DAMAGE			
115	90	307	0.02289	12.2	13.1	12.9	13.1	0.985	1131.0	NO DAMAGE			
115	85	2643	0.19704	12.2	13.1	12.9	13.1	0.982	942.5	NO DAMAGE			
115	80	181	0.01349	12.2	13.1	12.9	13.1	0.979	807.8	NO DAMAGE			
115	75	676	0.05040	12.2	13.1	12.8	13.1	0.976	706.9	NO DAMAGE			
115	70	30	0.00671	12.2	13.1	12.8	13.1	0.973	628.3	NO DAMAGE			
115	65	334	0.02490	12.2	13.1	12.7	13.1	0.970	565.5	NO DAMAGE			
115	60	32	0.00239	12.2	13.1	12.7	13.1	0.967	514.1	NO DAMAGE			

Max	Min	No.	α Pct	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	α/N	cycles per mile Yield stress	153.8 ksi
					Max	Min							
115	55	129	0.00962	12.2	13.1	12.7	13.1	0.964	471.2	NO DAMAGE			
115	50	13	0.00097	12.2	13.1	12.6	13.1	0.961	435.0	NO DAMAGE			
115	45	39	0.00291	12.2	13.1	12.6	13.1	0.958	403.9	NO DAMAGE			
115	40	5	0.00037	12.2	13.1	12.5	13.1	0.955	377.0	NO DAMAGE			
115	35	21	0.00157	12.2	13.1	12.5	13.1	0.952	353.4	NO DAMAGE			
115	30	1	0.00007	12.2	13.1	12.5	13.1	0.949	332.6	NO DAMAGE			
115	25	10	0.00075	12.2	13.1	12.4	13.1	0.946	314.2	NO DAMAGE			
115	20	2	0.00015	12.2	13.1	12.4	13.1	0.943	297.6	NO DAMAGE			
115	15	11	0.00082	12.2	13.1	12.3	13.1	0.940	282.7	NO DAMAGE			
115	5	18	0.00134	12.2	13.1	12.3	13.1	0.933	257.0	NO DAMAGE			
115	0	4	0.00030	12.2	13.1	12.2	13.1	0.930	245.9	NO DAMAGE			
115	-5	5	0.00037	12.2	13.1	12.2	13.1	0.927	235.6	NO DAMAGE			
115	-15	2	0.00015	12.2	13.1	12.1	13.1	0.921	217.5	NO DAMAGE			
115	-20	3	0.00022	12.2	13.1	12.1	13.1	0.918	209.4	NO DAMAGE			
115	-25	2	0.00015	12.2	13.1	12.0	13.1	0.915	202.0	NO DAMAGE			
115	-35	2	0.00015	12.2	13.1	11.9	13.1	0.909	188.5	NO DAMAGE			
115	-40	2	0.00015	12.2	13.1	11.9	13.1	0.906	182.4	NO DAMAGE			
115	-45	2	0.00015	12.2	13.1	11.9	13.1	0.903	176.7	NO DAMAGE			
115	-50	1	0.00007	12.2	13.1	11.8	13.1	0.900	171.4	NO DAMAGE			
115	-55	1	0.00007	12.2	13.1	11.8	13.1	0.897	166.3	NO DAMAGE			
115	-65	2	0.00015	12.2	13.1	11.7	13.1	0.891	157.1	NO DAMAGE			
115	-75	2	0.00015	12.2	13.1	11.6	13.1	0.885	148.8	NO DAMAGE			
115	-85	2	0.00015	12.2	13.1	11.5	13.1	0.879	141.4	NO DAMAGE			
115	-95	3	0.00022	12.2	13.1	11.5	13.1	0.873	134.6	NO DAMAGE			
115	-105	4	0.00030	12.2	13.1	11.4	13.1	0.867	128.5	NO DAMAGE			
115	-115	2	0.00015	12.2	13.1	11.3	13.1	0.861	122.9	NO DAMAGE			
115	-125	3	0.00022	12.2	13.1	11.2	13.1	0.855	117.8	NO DAMAGE			
115	-135	1	0.00007	12.2	13.1	11.1	13.1	0.849	113.1	NO DAMAGE			
115	-155	1	0.00007	12.2	13.1	11.0	13.1	0.837	104.7	NO DAMAGE			
115	-170	1	0.00007	12.2	13.1	10.9	13.1	0.828	99.2	NO DAMAGE			
115	-190	1	0.00007	12.2	13.1	10.7	13.1	0.816	92.7	NO DAMAGE			
115	-195	1	0.00007	12.2	13.1	10.7	13.1	0.813	91.2	NO DAMAGE			
115	-215	1	0.00007	12.2	13.1	10.5	13.1	0.800	85.7	NO DAMAGE			
110	100	3541	0.26399	12.2	13.1	13.0	13.1	0.994	2618.9	NO DAMAGE			
110	95	922	0.06874	12.2	13.1	13.0	13.1	0.991	1879.3	NO DAMAGE			
110	90	2060	0.15358	12.2	13.1	12.9	13.1	0.988	1409.5	NO DAMAGE			
110	85	527	0.03929	12.2	13.1	12.9	13.1	0.985	1127.6	NO DAMAGE			
110	80	1233	0.09192	12.2	13.1	12.9	13.1	0.982	939.6	NO DAMAGE			
110	75	313	0.02334	12.2	13.1	12.8	13.1	0.979	805.4	NO DAMAGE			
110	70	677	0.05047	12.2	13.1	12.8	13.1	0.976	704.7	NO DAMAGE			
110	65	107	0.00798	12.2	13.1	12.7	13.1	0.973	626.4	NO DAMAGE			
110	60	289	0.02155	12.2	13.1	12.7	13.1	0.970	563.8	NO DAMAGE			
110	55	26	0.00194	12.2	13.1	12.7	13.1	0.967	512.5	NO DAMAGE			
110	50	126	0.00939	12.2	13.1	12.6	13.1	0.964	469.9	NO DAMAGE			
110	45	5	0.00037	12.2	13.1	12.6	13.1	0.961	433.7	NO DAMAGE			
110	40	74	0.00552	12.2	13.1	12.5	13.1	0.958	402.7	NO DAMAGE			
110	35	6	0.00045	12.2	13.1	12.5	13.1	0.955	375.9	NO DAMAGE			
110	30	32	0.00239	12.2	13.1	12.5	13.1	0.951	352.4	NO DAMAGE			
110	25	2	0.00015	12.2	13.1	12.4	13.1	0.948	331.6	NO DAMAGE			
110	20	28	0.00209	12.2	13.1	12.4	13.1	0.945	313.2	NO DAMAGE			
110	15	1	0.00007	12.2	13.1	12.3	13.1	0.942	296.7	NO DAMAGE			
110	10	26	0.00194	12.2	13.1	12.3	13.1	0.939	281.9	NO DAMAGE			
110	5	1	0.00007	12.2	13.1	12.3	13.1	0.936	268.5	NO DAMAGE			
110	0	47	0.00350	12.2	13.1	12.2	13.1	0.933	256.3	NO DAMAGE			
110	-5	2	0.00015	12.2	13.1	12.2	13.1	0.930	245.1	NO DAMAGE			
110	-10	22	0.00164	12.2	13.1	12.1	13.1	0.927	234.9	NO DAMAGE			
110	-20	4	0.00030	12.2	13.1	12.1	13.1	0.921	216.8	NO DAMAGE			
110	-30	5	0.00037	12.2	13.1	12.0	13.1	0.915	201.4	NO DAMAGE			
110	-35	1	0.00007	12.2	13.1	11.9	13.1	0.912	194.4	NO DAMAGE			
110	-40	2	0.00015	12.2	13.1	11.9	13.1	0.909	187.9	NO DAMAGE			
110	-50	5	0.00037	12.2	13.1	11.8	13.1	0.903	176.2	NO DAMAGE			
110	-60	6	0.00045	12.2	13.1	11.7	13.1	0.897	165.8	NO DAMAGE			
110	-70	6	0.00045	12.2	13.1	11.7	13.1	0.891	156.6	NO DAMAGE			
110	-80	6	0.00045	12.2	13.1	11.6	13.1	0.885	148.4	NO DAMAGE			
110	-90	8	0.00060	12.2	13.1	11.5	13.1	0.879	140.9	NO DAMAGE			
110	-100	9	0.00067	12.2	13.1	11.4	13.1	0.873	134.2	NO DAMAGE			
110	-110	6	0.00045	12.2	13.1	11.3	13.1	0.867	128.1	NO DAMAGE			
110	-120	5	0.00037	12.2	13.1	11.3	13.1	0.860	122.6	NO DAMAGE			
110	-130	1	0.00007	12.2	13.1	11.2	13.1	0.854	117.5	NO DAMAGE			
110	-135	1	0.00007	12.2	13.1	11.1	13.1	0.851	115.1	NO DAMAGE			
110	-140	2	0.00015	12.2	13.1	11.1	13.1	0.848	112.8	NO DAMAGE			
110	-150	2	0.00015	12.2	13.1	11.0	13.1	0.842	108.4	NO DAMAGE			
110	-160	1	0.00007	12.2	13.1	10.9	13.1	0.836	104.4	NO DAMAGE			
110	-170	1	0.00007	12.2	13.1	10.9	13.1	0.830	100.7	NO DAMAGE			
110	-180	1	0.00007	12.2	13.1	10.8	13.1	0.824	97.2	NO DAMAGE			
110	-210	1	0.00007	12.2	13.1	10.6	13.1	0.806	88.1	NO DAMAGE			
105	95	10845	0.80852	12.2	13.1	13.0	13.1	0.994	2810.4	NO DAMAGE			
105	90	1293	0.09640	12.2	13.1	12.9	13.1	0.991	1873.6	NO DAMAGE			
105	85	5514	0.41108	12.2	13.1	12.9	13.1	0.988	1405.2	NO DAMAGE			
105	80	765	0.05703	12.2	13.1	12.9	13.1	0.985	1124.1	NO DAMAGE			
105	75	2419	0.18034	12.2	13.1	12.8	13.1	0.982	936.8	NO DAMAGE			
105	70	358	0.02669	12.2	13.1	12.8	13.1	0.979	803.0	NO DAMAGE			
105	65	920	0.06859	12.2	13.1	12.7	13.1	0.976	702.6	NO DAMAGE			
105	60	78	0.00582	12.2	13.1	12.7	13.1	0.973	624.5	NO DAMAGE			
105	55	262	0.01953	12.2	13.1	12.7	13.1	0.970	552.1	NO DAMAGE			
105	50	22	0.00164	12.2	13.1	12.6	13.1	0.967	511.0	NO DAMAGE			
105	45	100	0.00746	12.2	13.1	12.6	13.1	0.963	468.4	NO DAMAGE			
105	40	4	0.00030	12.2	13.1	12.5	13.1	0.960	432.4	NO DAMAGE			

Max	Min	No.	α	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	α/N	cycles per mile Yield stress	153.8 50 ksi
					Max	Min							
105	35	54	0.00403	12.2	13.1	12.5	13.1	0.957	401.5	NO DAMAGE			
105	30	1	0.00007	12.2	13.1	12.5	13.1	0.954	374.7	NO DAMAGE			
105	25	20	0.00149	12.2	13.1	12.4	13.1	0.951	351.3	NO DAMAGE			
105	20	4	0.00030	12.2	13.1	12.4	13.1	0.948	330.6	NO DAMAGE			
105	15	18	0.00134	12.2	13.1	12.3	13.1	0.945	312.3	NO DAMAGE			
105	10	1	0.00007	12.2	13.1	12.3	13.1	0.942	295.8	NO DAMAGE			
105	5	22	0.00164	12.2	13.1	12.3	13.1	0.939	281.0	NO DAMAGE			
105	0	2	0.00015	12.2	13.1	12.2	13.1	0.936	267.7	NO DAMAGE			
105	-5	4	0.00030	12.2	13.1	12.2	13.1	0.933	255.5	NO DAMAGE			
105	-10	1	0.00007	12.2	13.1	12.1	13.1	0.930	244.4	NO DAMAGE			
105	-15	3	0.00022	12.2	13.1	12.1	13.1	0.927	234.2	NO DAMAGE			
105	-20	1	0.00007	12.2	13.1	12.1	13.1	0.924	224.8	NO DAMAGE			
105	-25	2	0.00015	12.2	13.1	12.0	13.1	0.921	216.2	NO DAMAGE			
105	-35	4	0.00030	12.2	13.1	11.9	13.1	0.915	200.7	NO DAMAGE			
105	-45	3	0.00022	12.2	13.1	11.9	13.1	0.909	187.4	NO DAMAGE			
105	-55	1	0.00007	12.2	13.1	11.8	13.1	0.903	175.6	NO DAMAGE			
105	-65	1	0.00007	12.2	13.1	11.7	13.1	0.897	165.3	NO DAMAGE			
105	-75	2	0.00015	12.2	13.1	11.6	13.1	0.890	156.1	NO DAMAGE			
105	-85	6	0.00045	12.2	13.1	11.5	13.1	0.884	147.9	NO DAMAGE			
105	-95	6	0.00045	12.2	13.1	11.5	13.1	0.878	140.5	NO DAMAGE			
105	-105	3	0.00022	12.2	13.1	11.4	13.1	0.872	133.8	NO DAMAGE			
105	-110	2	0.00015	12.2	13.1	11.3	13.1	0.869	130.7	NO DAMAGE			
105	-120	2	0.00015	12.2	13.1	11.3	13.1	0.863	124.9	NO DAMAGE			
105	-125	1	0.00007	12.2	13.1	11.2	13.1	0.860	122.2	NO DAMAGE			
105	-145	3	0.00022	12.2	13.1	11.1	13.1	0.848	112.4	NO DAMAGE			
105	-165	1	0.00007	12.2	13.1	10.9	13.1	0.836	104.1	NO DAMAGE			
105	-185	1	0.00007	12.2	13.1	10.8	13.1	0.824	96.9	NO DAMAGE			
105	-195	1	0.00007	12.2	13.1	10.7	13.1	0.817	93.7	NO DAMAGE			
105	-225	1	0.00007	12.2	13.1	10.4	13.1	0.799	85.2	NO DAMAGE			
105	-255	1	0.00007	12.2	13.1	10.2	13.1	0.781	78.1	NO DAMAGE			
100	90	4690	0.34965	12.2	13.0	12.9	13.0	0.994	2801.8	NO DAMAGE			
100	85	1557	0.11608	12.2	13.0	12.9	13.0	0.991	1867.9	NO DAMAGE			
100	80	3257	0.24282	12.2	13.0	12.9	13.0	0.989	1400.9	NO DAMAGE			
100	75	901	0.06717	12.2	13.0	12.8	13.0	0.995	1120.7	NO DAMAGE			
100	70	1551	0.11563	12.2	13.0	12.8	13.0	0.982	933.9	NO DAMAGE			
100	65	248	0.01849	12.2	13.0	12.7	13.0	0.979	800.5	NO DAMAGE			
100	60	739	0.05509	12.2	13.0	12.7	13.0	0.976	700.5	NO DAMAGE			
100	55	63	0.00470	12.2	13.0	12.7	13.0	0.973	622.6	NO DAMAGE			
100	50	318	0.02371	12.2	13.0	12.6	13.0	0.969	560.4	NO DAMAGE			
100	45	22	0.00164	12.2	13.0	12.6	13.0	0.966	509.4	NO DAMAGE			
100	40	168	0.01252	12.2	13.0	12.5	13.0	0.963	467.0	NO DAMAGE			
100	35	5	0.00037	12.2	13.0	12.5	13.0	0.960	431.0	NO DAMAGE			
100	30	90	0.00671	12.2	13.0	12.5	13.0	0.957	400.3	NO DAMAGE			
100	25	11	0.00062	12.2	13.0	12.4	13.0	0.954	373.6	NO DAMAGE			
100	20	55	0.00410	12.2	13.0	12.4	13.0	0.951	350.2	NO DAMAGE			
100	15	1	0.00007	12.2	13.0	12.3	13.0	0.948	329.6	NO DAMAGE			
100	10	42	0.00313	12.2	13.0	12.3	13.0	0.945	311.3	NO DAMAGE			
100	5	2	0.00015	12.2	13.0	12.3	13.0	0.942	294.9	NO DAMAGE			
100	0	58	0.00432	12.2	13.0	12.2	13.0	0.939	280.2	NO DAMAGE			
100	-5	1	0.00007	12.2	13.0	12.2	13.0	0.936	266.8	NO DAMAGE			
100	-10	32	0.00239	12.2	13.0	12.1	13.0	0.933	254.7	NO DAMAGE			
100	-15	1	0.00007	12.2	13.0	12.1	13.0	0.930	243.6	NO DAMAGE			
100	-20	5	0.00037	12.2	13.0	12.1	13.0	0.927	233.5	NO DAMAGE			
100	-30	7	0.00052	12.2	13.0	12.0	13.0	0.921	215.5	NO DAMAGE			
100	-40	2	0.00015	12.2	13.0	11.9	13.0	0.915	200.1	NO DAMAGE			
100	-45	1	0.00007	12.2	13.0	11.9	13.0	0.912	193.2	NO DAMAGE			
100	-50	7	0.00052	12.2	13.0	11.8	13.0	0.908	186.8	NO DAMAGE			
100	-60	8	0.00060	12.2	13.0	11.7	13.0	0.902	175.1	NO DAMAGE			
100	-70	3	0.00022	12.2	13.0	11.7	13.0	0.896	164.8	NO DAMAGE			
100	-80	2	0.00015	12.2	13.0	11.6	13.0	0.890	155.7	NO DAMAGE			
100	-90	9	0.00067	12.2	13.0	11.5	13.0	0.884	147.5	NO DAMAGE			
100	-100	4	0.00030	12.2	13.0	11.4	13.0	0.878	140.1	NO DAMAGE			
100	-110	3	0.00022	12.2	13.0	11.3	13.0	0.872	133.4	NO DAMAGE			
100	-120	1	0.00007	12.2	13.0	11.3	13.0	0.866	127.4	NO DAMAGE			
100	-125	11	0.00007	12.2	13.0	11.2	13.0	0.863	124.5	NO DAMAGE			
100	-130	3	0.00022	12.2	13.0	11.2	13.0	0.860	121.8	NO DAMAGE			
100	-140	2	0.00015	12.2	13.0	11.1	13.0	0.854	116.7	NO DAMAGE			
100	-150	2	0.00015	12.2	13.0	11.0	13.0	0.847	112.1	NO DAMAGE			
100	-160	1	0.00007	12.2	13.0	10.9	13.0	0.841	107.8	NO DAMAGE			
100	-180	2	0.00015	12.2	13.0	10.8	13.0	0.829	100.1	NO DAMAGE			
100	-190	2	0.00015	12.2	13.0	10.7	13.0	0.823	96.6	NO DAMAGE			
100	-200	3	0.00022	12.2	13.0	10.6	13.0	0.817	93.4	NO DAMAGE			
100	-205	1	0.00007	12.2	13.0	10.6	13.0	0.814	91.9	NO DAMAGE			
100	-210	1	0.00007	12.2	13.0	10.6	13.0	0.811	90.4	NO DAMAGE			
95	85	7900	0.59897	12.2	13.0	12.9	13.0	0.994	2793.3	NO DAMAGE			
95	80	1725	0.12860	12.2	13.0	12.9	13.0	0.991	1862.2	NO DAMAGE			
95	75	6072	0.45268	12.2	13.0	12.8	13.0	0.988	1396.6	NO DAMAGE			
95	70	643	0.04794	12.2	13.0	12.8	13.0	0.985	1117.3	NO DAMAGE			
95	65	2494	0.18593	12.2	13.0	12.7	13.0	0.982	931.1	NO DAMAGE			
95	60	216	0.01610	12.2	13.0	12.7	13.0	0.979	798.1	NO DAMAGE			
95	55	984	0.07336	12.2	13.0	12.7	13.0	0.976	698.3	NO DAMAGE			
95	50	63	0.00470	12.2	13.0	12.6	13.0	0.972	620.7	NO DAMAGE			
95	45	319	0.02378	12.2	13.0	12.6	13.0	0.969	558.7	NO DAMAGE			
95	40	22	0.00164	12.2	13.0	12.5	13.0	0.966	507.9	NO DAMAGE			
95	35	103	0.00768	12.2	13.0	12.5	13.0	0.963	465.5	NO DAMAGE			
95	30	19	0.00142	12.2	13.0	12.5	13.0	0.960	429.7	NO DAMAGE			
95	25	38	0.00283	12.2	13.0	12.4	13.0	0.957	399.0	NO DAMAGE			
95	20	2	0.00015	12.2	13.0	12.4	13.0	0.954	372.4	NO DAMAGE			

Max	Min	No.	$\alpha$ Pct	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	$\alpha/N$	cycles per mile Yield stress	153.8 ksi
					Max	Min							
95	15	11	0.00082	12.2	13.0	12.3	13.0	0.951	349.2	NO DAMAGE			
95	5	28	0.00209	12.2	13.0	12.3	13.0	0.945	310.4	NO DAMAGE			
95	0	7	0.00052	12.2	13.0	12.2	13.0	0.942	294.0	NO DAMAGE			
95	-5	5	0.00037	12.2	13.0	12.2	13.0	0.939	279.3	NO DAMAGE			
95	-15	1	0.00007	12.2	13.0	12.1	13.0	0.933	253.9	NO DAMAGE			
95	-25	2	0.00015	12.2	13.0	12.0	13.0	0.927	232.8	NO DAMAGE			
95	-35	3	0.00022	12.2	13.0	11.9	13.0	0.920	214.9	NO DAMAGE			
95	-45	1	0.00007	12.2	13.0	11.9	13.0	0.914	199.5	NO DAMAGE			
95	-55	1	0.00007	12.2	13.0	11.8	13.0	0.908	186.2	NO DAMAGE			
95	-70	1	0.00007	12.2	13.0	11.7	13.0	0.899	169.3	NO DAMAGE			
95	-75	6	0.00045	12.2	13.0	11.6	13.0	0.896	164.3	NO DAMAGE			
95	-85	5	0.00037	12.2	13.0	11.5	13.0	0.890	155.2	NO DAMAGE			
95	-95	4	0.00030	12.2	13.0	11.5	13.0	0.884	147.0	NO DAMAGE			
95	-100	1	0.00007	12.2	13.0	11.4	13.0	0.881	143.2	NO DAMAGE			
95	-105	5	0.00037	12.2	13.0	11.4	13.0	0.878	139.7	NO DAMAGE			
95	-110	3	0.00022	12.2	13.0	11.3	13.0	0.875	136.3	NO DAMAGE			
95	-115	3	0.00022	12.2	13.0	11.3	13.0	0.871	133.0	NO DAMAGE			
95	-125	1	0.00007	12.2	13.0	11.2	13.0	0.865	127.0	NO DAMAGE			
95	-135	2	0.00015	12.2	13.0	11.1	13.0	0.859	121.4	NO DAMAGE			
95	-140	1	0.00007	12.2	13.0	11.1	13.0	0.856	118.9	NO DAMAGE			
95	-145	1	0.00007	12.2	13.0	11.1	13.0	0.853	116.4	NO DAMAGE			
95	-165	3	0.00022	12.2	13.0	10.9	13.0	0.841	107.4	NO DAMAGE			
95	-225	1	0.00007	12.2	13.0	10.4	13.0	0.804	87.3	NO DAMAGE			
95	-280	1	0.00007	12.2	13.0	10.0	13.0	0.770	74.5	NO DAMAGE			
90	80	6066	0.45224	12.2	12.9	12.9	12.9	0.994	2784.7	NO DAMAGE			
90	75	1408	0.10497	12.2	12.9	12.8	12.9	0.991	1856.5	NO DAMAGE			
90	70	3591	0.26772	12.2	12.9	12.8	12.9	0.988	1392.4	NO DAMAGE			
90	65	591	0.04406	12.2	12.9	12.7	12.9	0.985	1113.9	NO DAMAGE			
90	60	1593	0.11876	12.2	12.9	12.7	12.9	0.982	928.2	NO DAMAGE			
90	55	275	0.02050	12.2	12.9	12.7	12.9	0.979	795.6	NO DAMAGE			
90	50	789	0.05882	12.2	12.9	12.6	12.9	0.975	696.2	NO DAMAGE			
90	45	83	0.00619	12.2	12.9	12.6	12.9	0.972	618.8	NO DAMAGE			
90	40	470	0.03504	12.2	12.9	12.5	12.9	0.969	556.9	NO DAMAGE			
90	35	20	0.00149	12.2	12.9	12.5	12.9	0.966	506.3	NO DAMAGE			
90	30	188	0.01402	12.2	12.9	12.5	12.9	0.963	484.1	NO DAMAGE			
90	25	8	0.00060	12.2	12.9	12.4	12.9	0.960	428.4	NO DAMAGE			
90	20	113	0.00842	12.2	12.9	12.4	12.9	0.957	397.8	NO DAMAGE			
90	15	4	0.00030	12.2	12.9	12.3	12.9	0.954	371.3	NO DAMAGE			
90	10	68	0.00507	12.2	12.9	12.3	12.9	0.951	348.1	NO DAMAGE			
90	5	2	0.00015	12.2	12.9	12.3	12.9	0.948	327.6	NO DAMAGE			
90	0	78	0.00582	12.2	12.9	12.2	12.9	0.945	309.4	NO DAMAGE			
90	-5	2	0.00015	12.2	12.9	12.2	12.9	0.942	293.1	NO DAMAGE			
90	-10	32	0.00239	12.2	12.9	12.1	12.9	0.939	278.5	NO DAMAGE			
90	-15	1	0.00007	12.2	12.9	12.1	12.9	0.936	265.2	NO DAMAGE			
90	-20	4	0.00030	12.2	12.9	12.1	12.9	0.932	253.2	NO DAMAGE			
90	-30	4	0.00030	12.2	12.9	12.0	12.9	0.926	232.1	NO DAMAGE			
90	-40	6	0.00045	12.2	12.9	11.9	12.9	0.920	214.2	NO DAMAGE			
90	-45	1	0.00007	12.2	12.9	11.9	12.9	0.917	206.3	NO DAMAGE			
90	-50	7	0.00052	12.2	12.9	11.8	12.9	0.914	198.9	NO DAMAGE			
90	-60	14	0.00104	12.2	12.9	11.7	12.9	0.908	185.6	NO DAMAGE			
90	-70	8	0.00060	12.2	12.9	11.7	12.9	0.902	174.0	NO DAMAGE			
90	-80	13	0.00097	12.2	12.9	11.6	12.9	0.896	163.8	NO DAMAGE			
90	-90	6	0.00045	12.2	12.9	11.5	12.9	0.889	154.7	NO DAMAGE			
90	-95	1	0.00007	12.2	12.9	11.5	12.9	0.886	150.5	NO DAMAGE			
90	-100	7	0.00052	12.2	12.9	11.4	12.9	0.883	146.6	NO DAMAGE			
90	-110	2	0.00015	12.2	12.9	11.3	12.9	0.877	139.2	NO DAMAGE			
90	-115	2	0.00015	12.2	12.9	11.3	12.9	0.874	135.8	NO DAMAGE			
90	-120	3	0.00022	12.2	12.9	11.3	12.9	0.871	132.6	NO DAMAGE			
90	-140	2	0.00015	12.2	12.9	11.1	12.9	0.859	121.1	NO DAMAGE			
90	-145	1	0.00007	12.2	12.9	11.1	12.9	0.856	118.5	NO DAMAGE			
90	-150	2	0.00015	12.2	12.9	11.0	12.9	0.853	116.0	NO DAMAGE			
90	-160	3	0.00022	12.2	12.9	10.9	12.9	0.846	111.4	NO DAMAGE			
90	-170	1	0.00007	12.2	12.9	10.9	12.9	0.840	107.1	NO DAMAGE			
90	-180	1	0.00007	12.2	12.9	10.8	12.9	0.834	103.1	NO DAMAGE			
90	-190	1	0.00007	12.2	12.9	10.7	12.9	0.828	99.5	NO DAMAGE			
85	75	8202	0.61148	12.2	12.9	12.9	12.9	0.994	2776.2	NO DAMAGE			
85	70	1902	0.14180	12.2	12.9	12.8	12.9	0.991	1850.8	NO DAMAGE			
85	65	6590	0.49130	12.2	12.9	12.7	12.9	0.988	1388.1	NO DAMAGE			
85	60	711	0.05301	12.2	12.9	12.7	12.9	0.985	1110.5	NO DAMAGE			
85	55	3052	0.22754	12.2	12.9	12.7	12.9	0.982	925.4	NO DAMAGE			
85	50	292	0.02177	12.2	12.9	12.6	12.9	0.978	793.2	NO DAMAGE			
85	45	792	0.05905	12.2	12.9	12.6	12.9	0.975	694.0	NO DAMAGE			
85	40	65	0.00485	12.2	12.9	12.5	12.9	0.972	616.9	NO DAMAGE			
85	35	260	0.01938	12.2	12.9	12.5	12.9	0.969	555.2	NO DAMAGE			
85	30	14	0.00104	12.2	12.9	12.5	12.9	0.966	504.9	NO DAMAGE			
85	25	111	0.00838	12.2	12.9	12.4	12.9	0.963	462.7	NO DAMAGE			
85	20	1	0.00007	12.2	12.9	12.4	12.9	0.960	427.1	NO DAMAGE			
85	15	71	0.00529	12.2	12.9	12.3	12.9	0.957	396.6	NO DAMAGE			
85	5	72	0.00537	12.2	12.9	12.3	12.9	0.951	347.0	NO DAMAGE			
85	0	6	0.00045	12.2	12.9	12.2	12.9	0.948	326.6	NO DAMAGE			
85	-5	6	0.00045	12.2	12.9	12.2	12.9	0.945	308.5	NO DAMAGE			
85	-15	5	0.00037	12.2	12.9	12.1	12.9	0.938	277.6	NO DAMAGE			
85	-20	1	0.00007	12.2	12.9	12.1	12.9	0.935	264.4	NO DAMAGE			
85	-25	2	0.00015	12.2	12.9	12.0	12.9	0.932	252.4	NO DAMAGE			
85	-35	2	0.00015	12.2	12.9	11.9	12.9	0.926	231.3	NO DAMAGE			
85	-45	6	0.00045	12.2	12.9	11.9	12.9	0.920	213.6	NO DAMAGE			
85	-50	2	0.00015	12.2	12.9	11.8	12.9	0.917	205.6	NO DAMAGE			
85	-55	2	0.00015	12.2	12.9	11.8	12.9	0.914	198.3	NO DAMAGE			

Max	Min	No.	α	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	α/N	cycles per mile Yield stress	153.8 50 ksi
					Max	Min							
85	-65	4	0.00030	12.2	12.9	11.7	12.9	0.908	185.1	NO DAMAGE			
85	-70	1	0.00007	12.2	12.9	11.7	12.9	0.905	179.1	NO DAMAGE			
85	-75	5	0.00037	12.2	12.9	11.6	12.9	0.901	173.5	NO DAMAGE			
85	-85	4	0.00030	12.2	12.9	11.5	12.9	0.895	163.3	NO DAMAGE			
85	-90	1	0.00007	12.2	12.9	11.5	12.9	0.892	158.6	NO DAMAGE			
85	-95	5	0.00037	12.2	12.9	11.5	12.9	0.889	154.2	NO DAMAGE			
85	-100	1	0.00007	12.2	12.9	11.4	12.9	0.886	150.1	NO DAMAGE			
85	-105	3	0.00022	12.2	12.9	11.4	12.9	0.883	146.1	NO DAMAGE			
85	-110	3	0.00022	12.2	12.9	11.3	12.9	0.880	142.4	NO DAMAGE			
85	-115	1	0.00007	12.2	12.9	11.3	12.9	0.877	138.8	NO DAMAGE			
85	-135	1	0.00007	12.2	12.9	11.1	12.9	0.864	126.2	NO DAMAGE			
85	-145	1	0.00007	12.2	12.9	11.1	12.9	0.858	120.7	NO DAMAGE			
85	-165	1	0.00007	12.2	12.9	10.9	12.9	0.846	111.0	NO DAMAGE			
85	-215	1	0.00007	12.2	12.9	10.5	12.9	0.815	92.5	NO DAMAGE			
80	70	7655	0.57070	12.2	12.9	12.8	12.9	0.994	2767.6	NO DAMAGE			
80	65	1558	0.11615	12.2	12.9	12.7	12.9	0.991	1845.1	NO DAMAGE			
80	60	4677	0.34868	12.2	12.9	12.7	12.9	0.988	1383.8	NO DAMAGE			
80	55	681	0.05077	12.2	12.9	12.7	12.9	0.985	1107.0	NO DAMAGE			
80	50	2097	0.15634	12.2	12.9	12.6	12.9	0.981	922.5	NO DAMAGE			
80	45	222	0.01655	12.2	12.9	12.6	12.9	0.978	790.7	NO DAMAGE			
80	40	927	0.06911	12.2	12.9	12.5	12.9	0.975	691.9	NO DAMAGE			
80	35	49	0.00365	12.2	12.9	12.5	12.9	0.972	615.0	NO DAMAGE			
80	30	460	0.03429	12.2	12.9	12.5	12.9	0.969	553.5	NO DAMAGE			
80	25	16	0.00119	12.2	12.9	12.4	12.9	0.966	503.2	NO DAMAGE			
80	20	239	0.01782	12.2	12.9	12.4	12.9	0.963	461.3	NO DAMAGE			
80	15	7	0.00052	12.2	12.9	12.3	12.9	0.960	425.8	NO DAMAGE			
80	10	110	0.00820	12.2	12.9	12.3	12.9	0.957	395.4	NO DAMAGE			
80	5	4	0.00030	12.2	12.9	12.3	12.9	0.954	369.0	NO DAMAGE			
80	0	129	0.00962	12.2	12.9	12.2	12.9	0.951	346.0	NO DAMAGE			
80	-5	2	0.00015	12.2	12.9	12.2	12.9	0.947	325.6	NO DAMAGE			
80	-10	63	0.00470	12.2	12.9	12.1	12.9	0.944	307.5	NO DAMAGE			
80	-15	1	0.00007	12.2	12.9	12.1	12.9	0.941	291.3	NO DAMAGE			
80	-20	4	0.00030	12.2	12.9	12.1	12.9	0.938	276.8	NO DAMAGE			
80	-25	1	0.00007	12.2	12.9	12.0	12.9	0.935	263.6	NO DAMAGE			
80	-30	5	0.00037	12.2	12.9	12.0	12.9	0.932	251.8	NO DAMAGE			
80	-35	1	0.00007	12.2	12.9	11.9	12.9	0.929	240.7	NO DAMAGE			
80	-40	7	0.00052	12.2	12.9	11.9	12.9	0.926	230.6	NO DAMAGE			
80	-50	15	0.00112	12.2	12.9	11.8	12.9	0.920	212.9	NO DAMAGE			
80	-55	1	0.00007	12.2	12.9	11.8	12.9	0.917	205.0	NO DAMAGE			
80	-60	12	0.00089	12.2	12.9	11.7	12.9	0.913	197.7	NO DAMAGE			
80	-70	10	0.00075	12.2	12.9	11.7	12.9	0.907	184.5	NO DAMAGE			
80	-75	1	0.00007	12.2	12.9	11.6	12.9	0.904	178.6	NO DAMAGE			
80	-80	13	0.00097	12.2	12.9	11.6	12.9	0.901	173.0	NO DAMAGE			
80	-85	1	0.00007	12.2	12.9	11.5	12.9	0.898	167.7	NO DAMAGE			
80	-90	8	0.00060	12.2	12.9	11.5	12.9	0.895	162.8	NO DAMAGE			
80	-95	1	0.00007	12.2	12.9	11.5	12.9	0.892	158.1	NO DAMAGE			
80	-100	4	0.00030	12.2	12.9	11.4	12.9	0.889	153.8	NO DAMAGE			
80	-110	2	0.00015	12.2	12.9	11.3	12.9	0.883	145.7	NO DAMAGE			
80	-120	4	0.00030	12.2	12.9	11.3	12.9	0.876	138.4	NO DAMAGE			
80	-130	1	0.00007	12.2	12.9	11.2	12.9	0.870	131.8	NO DAMAGE			
80	-140	1	0.00007	12.2	12.9	11.1	12.9	0.864	125.8	NO DAMAGE			
80	-150	3	0.00022	12.2	12.9	11.0	12.9	0.858	120.3	NO DAMAGE			
80	-170	1	0.00007	12.2	12.9	10.9	12.9	0.846	110.7	NO DAMAGE			
80	-220	1	0.00007	12.2	12.9	10.5	12.9	0.815	92.3	NO DAMAGE			
75	65	8167	0.60867	12.2	12.8	12.7	12.8	0.994	2759.1	NO DAMAGE			
75	60	1797	0.13397	12.2	12.8	12.7	12.8	0.991	1839.4	NO DAMAGE			
75	55	5826	0.43434	12.2	12.8	12.7	12.8	0.988	1379.5	NO DAMAGE			
75	50	731	0.05450	12.2	12.8	12.6	12.8	0.985	1103.6	NO DAMAGE			
75	45	2118	0.15790	12.2	12.8	12.6	12.8	0.981	919.7	NO DAMAGE			
75	40	220	0.01640	12.2	12.8	12.5	12.8	0.978	788.3	NO DAMAGE			
75	35	882	0.06576	12.2	12.8	12.5	12.8	0.975	689.8	NO DAMAGE			
75	30	70	0.00522	12.2	12.8	12.5	12.8	0.972	613.1	NO DAMAGE			
75	25	369	0.02751	12.2	12.8	12.4	12.8	0.969	551.8	NO DAMAGE			
75	20	19	0.00142	12.2	12.8	12.4	12.8	0.966	501.6	NO DAMAGE			
75	15	149	0.01111	12.2	12.8	12.3	12.8	0.963	459.8	NO DAMAGE			
75	10	6	0.00045	12.2	12.8	12.3	12.8	0.960	424.5	NO DAMAGE			
75	5	111	0.00828	12.2	12.8	12.3	12.8	0.957	394.2	NO DAMAGE			
75	0	15	0.00112	12.2	12.8	12.2	12.8	0.954	367.9	NO DAMAGE			
75	-5	10	0.00075	12.2	12.8	12.2	12.8	0.950	344.9	NO DAMAGE			
75	-15	4	0.00030	12.2	12.8	12.1	12.8	0.944	306.6	NO DAMAGE			
75	-25	4	0.00030	12.2	12.8	12.0	12.8	0.938	275.9	NO DAMAGE			
75	-35	1	0.00007	12.2	12.8	11.9	12.8	0.932	250.8	NO DAMAGE			
75	-45	1	0.00007	12.2	12.8	11.9	12.8	0.926	229.9	NO DAMAGE			
75	-55	3	0.00022	12.2	12.8	11.8	12.8	0.919	212.2	NO DAMAGE			
75	-65	3	0.00022	12.2	12.8	11.7	12.8	0.913	197.1	NO DAMAGE			
75	-75	3	0.00022	12.2	12.8	11.6	12.8	0.907	183.9	NO DAMAGE			
75	-85	2	0.00015	12.2	12.8	11.5	12.8	0.901	172.4	NO DAMAGE			
75	-90	1	0.00007	12.2	12.8	11.5	12.8	0.898	167.2	NO DAMAGE			
75	-95	2	0.00015	12.2	12.8	11.5	12.8	0.895	162.3	NO DAMAGE			
75	-105	2	0.00015	12.2	12.8	11.4	12.8	0.888	153.3	NO DAMAGE			
75	-110	1	0.00007	12.2	12.8	11.3	12.8	0.885	149.1	NO DAMAGE			
75	-115	3	0.00022	12.2	12.8	11.3	12.8	0.882	145.2	NO DAMAGE			
75	-135	1	0.00007	12.2	12.8	11.1	12.8	0.870	131.4	NO DAMAGE			
75	-145	1	0.00007	12.2	12.8	11.1	12.8	0.864	125.4	NO DAMAGE			
75	-160	1	0.00007	12.2	12.8	10.9	12.8	0.854	117.4	NO DAMAGE			
75	-215	2	0.00015	12.2	12.8	10.5	12.8	0.820	95.1	NO DAMAGE			
75	-235	1	0.00007	12.2	12.8	10.4	12.8	0.808	89.0	NO DAMAGE			
70	60	8507	0.63422	12.2	12.8	12.7	12.8	0.994	2750.5	NO DAMAGE			

Max	Min	No.	α Pct	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	α/N	cycles per mile Yield stress	153.8 ksi
					Max	Min							
70	55	1533	0.11429	12.2	12.8	12.7	12.8	0.991	1833.7	NO DAMAGE			
70	50	5273	0.39312	12.2	12.8	12.6	12.8	0.988	1375.3	NO DAMAGE			
70	45	696	0.05189	12.2	12.8	12.6	12.8	0.994	1100.2	NO DAMAGE			
70	40	2334	0.17401	12.2	12.8	12.5	12.8	0.981	916.8	NO DAMAGE			
70	35	258	0.01923	12.2	12.8	12.5	12.8	0.978	785.9	NO DAMAGE			
70	30	1115	0.08313	12.2	12.8	12.5	12.8	0.975	687.6	NO DAMAGE			
70	25	49	0.00365	12.2	12.8	12.4	12.8	0.972	611.2	NO DAMAGE			
70	20	562	0.04190	12.2	12.8	12.4	12.8	0.969	550.1	NO DAMAGE			
70	15	11	0.00082	12.2	12.8	12.3	12.8	0.966	500.1	NO DAMAGE			
70	10	276	0.02058	12.2	12.8	12.3	12.8	0.963	458.4	NO DAMAGE			
70	5	7	0.00052	12.2	12.8	12.3	12.8	0.960	423.2	NO DAMAGE			
70	0	205	0.01528	12.2	12.8	12.2	12.8	0.956	392.9	NO DAMAGE			
70	-5	3	0.00022	12.2	12.8	12.2	12.8	0.953	366.7	NO DAMAGE			
70	-10	102	0.00760	12.2	12.8	12.1	12.8	0.950	343.8	NO DAMAGE			
70	-20	8	0.00060	12.2	12.8	12.1	12.8	0.944	305.6	NO DAMAGE			
70	-30	7	0.00052	12.2	12.8	12.0	12.8	0.938	275.1	NO DAMAGE			
70	-40	11	0.00082	12.2	12.8	11.9	12.8	0.932	250.0	NO DAMAGE			
70	-45	2	0.00015	12.2	12.8	11.9	12.8	0.929	239.2	NO DAMAGE			
70	-50	13	0.00097	12.2	12.8	11.8	12.8	0.925	229.2	NO DAMAGE			
70	-55	1	0.00007	12.2	12.8	11.8	12.8	0.922	220.0	NO DAMAGE			
70	-60	15	0.00112	12.2	12.8	11.7	12.8	0.919	211.6	NO DAMAGE			
70	-70	13	0.00097	12.2	12.8	11.7	12.8	0.913	196.5	NO DAMAGE			
70	-75	1	0.00007	12.2	12.8	11.6	12.8	0.910	189.7	NO DAMAGE			
70	-80	7	0.00052	12.2	12.8	11.6	12.8	0.907	183.4	NO DAMAGE			
70	-90	7	0.00052	12.2	12.8	11.5	12.8	0.901	171.9	NO DAMAGE			
70	-95	3	0.00022	12.2	12.8	11.5	12.8	0.897	166.7	NO DAMAGE			
70	-100	7	0.00052	12.2	12.8	11.4	12.8	0.894	161.8	NO DAMAGE			
70	-105	1	0.00007	12.2	12.8	11.4	12.8	0.891	157.2	NO DAMAGE			
70	-110	3	0.00022	12.2	12.8	11.3	12.8	0.888	152.8	NO DAMAGE			
70	-120	1	0.00007	12.2	12.8	11.3	12.8	0.882	144.8	NO DAMAGE			
70	-125	1	0.00007	12.2	12.8	11.2	12.8	0.879	141.1	NO DAMAGE			
70	-130	2	0.00015	12.2	12.8	11.2	12.8	0.876	137.5	NO DAMAGE			
70	-135	1	0.00007	12.2	12.8	11.1	12.8	0.873	134.2	NO DAMAGE			
70	-140	4	0.00030	12.2	12.8	11.1	12.8	0.869	131.0	NO DAMAGE			
65	55	7279	0.54267	12.2	12.7	12.7	12.7	0.994	2742.0	NO DAMAGE			
65	50	1741	0.12980	12.2	12.7	12.6	12.7	0.991	1828.0	NO DAMAGE			
65	45	6262	0.46685	12.2	12.7	12.6	12.7	0.988	1371.0	NO DAMAGE			
65	40	731	0.05450	12.2	12.7	12.5	12.7	0.984	1096.8	NO DAMAGE			
65	35	2747	0.20480	12.2	12.7	12.5	12.7	0.981	914.0	NO DAMAGE			
65	30	194	0.01446	12.2	12.7	12.5	12.7	0.978	783.4	NO DAMAGE			
65	25	998	0.07440	12.2	12.7	12.4	12.7	0.975	685.5	NO DAMAGE			
65	20	64	0.00477	12.2	12.7	12.4	12.7	0.972	609.3	NO DAMAGE			
65	15	357	0.02662	12.2	12.7	12.3	12.7	0.969	548.4	NO DAMAGE			
65	10	15	0.00112	12.2	12.7	12.3	12.7	0.966	498.5	NO DAMAGE			
65	5	243	0.01812	12.2	12.7	12.3	12.7	0.963	457.0	NO DAMAGE			
65	0	10	0.00075	12.2	12.7	12.2	12.7	0.959	421.8	NO DAMAGE			
65	-5	12	0.00089	12.2	12.7	12.2	12.7	0.956	391.7	NO DAMAGE			
65	-15	5	0.00037	12.2	12.7	12.1	12.7	0.950	342.7	NO DAMAGE			
65	-25	2	0.00015	12.2	12.7	12.0	12.7	0.944	304.7	NO DAMAGE			
65	-35	4	0.00030	12.2	12.7	11.9	12.7	0.938	274.2	NO DAMAGE			
65	-45	4	0.00030	12.2	12.7	11.9	12.7	0.931	249.3	NO DAMAGE			
65	-50	1	0.00007	12.2	12.7	11.8	12.7	0.928	238.4	NO DAMAGE			
65	-55	1	0.00007	12.2	12.7	11.8	12.7	0.925	228.5	NO DAMAGE			
65	-65	3	0.00022	12.2	12.7	11.7	12.7	0.919	210.9	NO DAMAGE			
65	-75	2	0.00015	12.2	12.7	11.6	12.7	0.913	195.9	NO DAMAGE			
65	-80	3	0.00022	12.2	12.7	11.6	12.7	0.910	189.1	NO DAMAGE			
65	-85	4	0.00030	12.2	12.7	11.5	12.7	0.906	182.8	NO DAMAGE			
65	-95	3	0.00022	12.2	12.7	11.5	12.7	0.900	171.4	NO DAMAGE			
65	-125	2	0.00015	12.2	12.7	11.2	12.7	0.882	144.3	NO DAMAGE			
65	-135	1	0.00007	12.2	12.7	11.1	12.7	0.875	137.1	NO DAMAGE			
65	-145	1	0.00007	12.2	12.7	11.1	12.7	0.869	130.6	NO DAMAGE			
65	-155	2	0.00015	12.2	12.7	11.0	12.7	0.863	124.6	NO DAMAGE			
65	-195	1	0.00007	12.2	12.7	10.7	12.7	0.838	105.5	NO DAMAGE			
65	-205	1	0.00007	12.2	12.7	10.6	12.7	0.832	101.6	NO DAMAGE			
60	50	9784	0.72942	12.2	12.7	12.6	12.7	0.994	2733.4	NO DAMAGE			
60	45	1627	0.12130	12.2	12.7	12.6	12.7	0.991	1822.3	NO DAMAGE			
60	40	7071	0.52716	12.2	12.7	12.5	12.7	0.987	1366.7	NO DAMAGE			
60	35	637	0.04749	12.2	12.7	12.5	12.7	0.984	1093.4	NO DAMAGE			
60	30	2949	0.21986	12.2	12.7	12.5	12.7	0.981	911.1	NO DAMAGE			
60	25	225	0.01677	12.2	12.7	12.4	12.7	0.978	781.0	NO DAMAGE			
60	20	1559	0.11623	12.2	12.7	12.4	12.7	0.975	683.4	NO DAMAGE			
60	15	59	0.00440	12.2	12.7	12.3	12.7	0.972	607.4	NO DAMAGE			
60	10	740	0.05517	12.2	12.7	12.3	12.7	0.969	546.7	NO DAMAGE			
60	5	16	0.00119	12.2	12.7	12.3	12.7	0.966	497.0	NO DAMAGE			
60	0	419	0.03124	12.2	12.7	12.2	12.7	0.962	455.6	NO DAMAGE			
60	-5	3	0.00022	12.2	12.7	12.2	12.7	0.959	420.5	NO DAMAGE			
60	-10	132	0.00984	12.2	12.7	12.1	12.7	0.956	390.5	NO DAMAGE			
60	-15	1	0.00007	12.2	12.7	12.1	12.7	0.953	364.5	NO DAMAGE			
60	-20	7	0.00052	12.2	12.7	12.1	12.7	0.950	341.7	NO DAMAGE			
60	-25	1	0.00007	12.2	12.7	12.0	12.7	0.947	321.6	NO DAMAGE			
60	-30	11	0.00082	12.2	12.7	12.0	12.7	0.944	303.7	NO DAMAGE			
60	-40	7	0.00052	12.2	12.7	11.9	12.7	0.937	273.3	NO DAMAGE			
60	-50	10	0.00075	12.2	12.7	11.8	12.7	0.931	248.5	NO DAMAGE			
60	-55	1	0.00007	12.2	12.7	11.8	12.7	0.928	237.7	NO DAMAGE			
60	-60	10	0.00075	12.2	12.7	11.7	12.7	0.925	227.8	NO DAMAGE			
60	-70	14	0.01044	12.2	12.7	11.7	12.7	0.919	210.3	NO DAMAGE			
60	-80	9	0.00067	12.2	12.7	11.6	12.7	0.912	195.2	NO DAMAGE			
60	-90	7	0.00052	12.2	12.7	11.5	12.7	0.906	182.2	NO DAMAGE			

Max	Min	No.	α	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	α/N	cycles per mile Yield stress	153.8 50 ksi
					Max	Min							
60	-100	6	0.00045	12.2	12.7	11.4	12.7	0.900	170.8	NO DAMAGE			
60	-110	3	0.00022	12.2	12.7	11.3	12.7	0.894	160.8	NO DAMAGE			
60	-120	4	0.00030	12.2	12.7	11.3	12.7	0.887	151.9	NO DAMAGE			
60	-130	3	0.00022	12.2	12.7	11.2	12.7	0.881	143.9	NO DAMAGE			
60	-140	2	0.00015	12.2	12.7	11.1	12.7	0.875	136.7	NO DAMAGE			
60	-220	1	0.00007	12.2	12.7	10.5	12.7	0.825	97.6	NO DAMAGE			
55	45	8119	0.60529	12.2	12.7	12.6	12.7	0.994	2724.9	NO DAMAGE			
55	40	1589	0.11846	12.2	12.7	12.5	12.7	0.991	1816.6	NO DAMAGE			
55	35	6838	0.50979	12.2	12.7	12.5	12.7	0.987	1362.4	NO DAMAGE			
55	30	654	0.04876	12.2	12.7	12.5	12.7	0.984	1089.9	NO DAMAGE			
55	25	2920	0.21769	12.2	12.7	12.4	12.7	0.981	908.3	NO DAMAGE			
55	20	269	0.02005	12.2	12.7	12.4	12.7	0.978	778.5	NO DAMAGE			
55	15	1189	0.08894	12.2	12.7	12.3	12.7	0.975	681.2	NO DAMAGE			
55	10	81	0.00455	12.2	12.7	12.3	12.7	0.972	605.5	NO DAMAGE			
55	5	597	0.04451	12.2	12.7	12.3	12.7	0.969	545.0	NO DAMAGE			
55	0	26	0.00194	12.2	12.7	12.2	12.7	0.965	495.4	NO DAMAGE			
55	-5	38	0.00283	12.2	12.7	12.2	12.7	0.962	454.1	NO DAMAGE			
55	-10	1	0.00007	12.2	12.7	12.1	12.7	0.959	419.2	NO DAMAGE			
55	-15	6	0.00045	12.2	12.7	12.1	12.7	0.956	389.3	NO DAMAGE			
55	-25	7	0.00052	12.2	12.7	12.0	12.7	0.950	340.6	NO DAMAGE			
55	-35	2	0.00015	12.2	12.7	11.9	12.7	0.944	302.8	NO DAMAGE			
55	-45	4	0.00030	12.2	12.7	11.9	12.7	0.937	272.5	NO DAMAGE			
55	-55	1	0.00007	12.2	12.7	11.8	12.7	0.931	247.7	NO DAMAGE			
55	-65	3	0.00022	12.2	12.7	11.7	12.7	0.925	227.1	NO DAMAGE			
55	-70	1	0.00007	12.2	12.7	11.7	12.7	0.922	218.0	NO DAMAGE			
55	-75	1	0.00007	12.2	12.7	11.6	12.7	0.918	209.6	NO DAMAGE			
55	-85	1	0.00007	12.2	12.7	11.5	12.7	0.912	194.6	NO DAMAGE			
55	-95	3	0.00022	12.2	12.7	11.5	12.7	0.906	181.7	NO DAMAGE			
55	-105	3	0.00022	12.2	12.7	11.4	12.7	0.900	170.3	NO DAMAGE			
55	-110	1	0.00007	12.2	12.7	11.3	12.7	0.896	165.1	NO DAMAGE			
55	-115	1	0.00007	12.2	12.7	11.3	12.7	0.893	160.3	NO DAMAGE			
55	-135	2	0.00015	12.2	12.7	11.1	12.7	0.881	143.4	NO DAMAGE			
55	-150	1	0.00007	12.2	12.7	11.0	12.7	0.871	132.9	NO DAMAGE			
55	-165	1	0.00007	12.2	12.7	10.9	12.7	0.863	123.9	NO DAMAGE			
50	40	12549	0.93556	12.2	12.6	12.5	12.6	0.994	2716.3	NO DAMAGE			
50	35	1846	0.13762	12.2	12.6	12.5	12.6	0.991	1810.9	NO DAMAGE			
50	30	10880	0.81113	12.2	12.6	12.5	12.6	0.987	1358.2	NO DAMAGE			
50	25	787	0.05867	12.2	12.6	12.4	12.6	0.984	1086.5	NO DAMAGE			
50	20	5251	0.39148	12.2	12.6	12.4	12.6	0.981	905.4	NO DAMAGE			
50	15	264	0.01968	12.2	12.6	12.3	12.6	0.978	776.1	NO DAMAGE			
50	10	2229	0.16618	12.2	12.6	12.3	12.6	0.975	679.1	NO DAMAGE			
50	5	56	0.00417	12.2	12.6	12.3	12.6	0.972	603.6	NO DAMAGE			
50	0	885	0.06588	12.2	12.6	12.2	12.6	0.969	543.3	NO DAMAGE			
50	-5	9	0.00067	12.2	12.6	12.2	12.6	0.965	493.9	NO DAMAGE			
50	-10	181	0.01349	12.2	12.6	12.1	12.6	0.962	452.7	NO DAMAGE			
50	-20	15	0.00112	12.2	12.6	12.1	12.6	0.956	388.0	NO DAMAGE			
50	-25	1	0.00007	12.2	12.6	12.0	12.6	0.953	362.2	NO DAMAGE			
50	-30	12	0.00089	12.2	12.6	12.0	12.6	0.950	339.5	NO DAMAGE			
50	-40	17	0.00127	12.2	12.6	11.9	12.6	0.943	301.8	NO DAMAGE			
50	-45	1	0.00007	12.2	12.6	11.9	12.6	0.940	285.9	NO DAMAGE			
50	-50	20	0.00149	12.2	12.6	11.8	12.6	0.937	271.6	NO DAMAGE			
50	-60	19	0.00142	12.2	12.6	11.7	12.6	0.931	246.9	NO DAMAGE			
50	-65	1	0.00007	12.2	12.6	11.7	12.6	0.928	236.2	NO DAMAGE			
50	-70	9	0.00067	12.2	12.6	11.7	12.6	0.924	226.4	NO DAMAGE			
50	-75	2	0.00015	12.2	12.6	11.6	12.6	0.921	217.3	NO DAMAGE			
50	-80	8	0.00060	12.2	12.6	11.6	12.6	0.918	208.9	NO DAMAGE			
50	-90	6	0.00045	12.2	12.6	11.5	12.6	0.912	194.0	NO DAMAGE			
50	-100	4	0.00030	12.2	12.6	11.4	12.6	0.906	181.1	NO DAMAGE			
50	-105	1	0.00007	12.2	12.6	11.4	12.6	0.902	175.2	NO DAMAGE			
50	-110	2	0.00015	12.2	12.6	11.3	12.6	0.899	169.8	NO DAMAGE			
50	-120	2	0.00015	12.2	12.6	11.3	12.6	0.893	159.8	NO DAMAGE			
50	-130	2	0.00015	12.2	12.6	11.2	12.6	0.887	150.9	NO DAMAGE			
50	-140	1	0.00007	12.2	12.6	11.1	12.6	0.880	143.0	NO DAMAGE			
50	-210	1	0.00007	12.2	12.6	10.6	12.6	0.836	104.5	NO DAMAGE			
45	35	8451	0.63005	12.2	12.6	12.5	12.6	0.994	2707.8	NO DAMAGE			
45	30	1938	0.14448	12.2	12.6	12.5	12.6	0.991	1805.2	NO DAMAGE			
45	25	7167	0.53432	12.2	12.6	12.4	12.6	0.987	1353.9	NO DAMAGE			
45	20	859	0.06404	12.2	12.6	12.4	12.6	0.984	1083.1	NO DAMAGE			
45	15	3380	0.25199	12.2	12.6	12.3	12.6	0.981	902.6	NO DAMAGE			
45	10	291	0.02169	12.2	12.6	12.3	12.6	0.978	773.6	NO DAMAGE			
45	5	1312	0.09781	12.2	12.6	12.3	12.6	0.975	676.9	NO DAMAGE			
45	0	52	0.00388	12.2	12.6	12.2	12.6	0.972	601.7	NO DAMAGE			
45	-5	25	0.00186	12.2	12.6	12.2	12.6	0.968	541.6	NO DAMAGE			
45	-15	13	0.00097	12.2	12.6	12.1	12.6	0.962	451.3	NO DAMAGE			
45	-25	5	0.00037	12.2	12.6	12.0	12.6	0.956	386.8	NO DAMAGE			
45	-30	1	0.00007	12.2	12.6	12.0	12.6	0.953	361.0	NO DAMAGE			
45	-35	2	0.00015	12.2	12.6	11.9	12.6	0.949	338.5	NO DAMAGE			
45	-45	5	0.00037	12.2	12.6	11.9	12.6	0.943	300.9	NO DAMAGE			
45	-55	1	0.00007	12.2	12.6	11.8	12.6	0.937	270.8	NO DAMAGE			
45	-60	1	0.00007	12.2	12.6	11.7	12.6	0.934	257.9	NO DAMAGE			
45	-65	1	0.00007	12.2	12.6	11.7	12.6	0.931	246.2	NO DAMAGE			
45	-75	2	0.00015	12.2	12.6	11.6	12.6	0.924	225.6	NO DAMAGE			
45	-85	2	0.00015	12.2	12.6	11.5	12.6	0.918	208.3	NO DAMAGE			
45	-90	1	0.00007	12.2	12.6	11.5	12.6	0.915	200.6	NO DAMAGE			
45	-95	1	0.00007	12.2	12.6	11.5	12.6	0.912	193.4	NO DAMAGE			
45	-105	1	0.00007	12.2	12.6	11.4	12.6	0.905	180.5	NO DAMAGE			
45	-115	1	0.00007	12.2	12.6	11.3	12.6	0.899	169.2	NO DAMAGE			
45	-135	1	0.00007	12.2	12.6	11.1	12.6	0.886	150.4	NO DAMAGE			

Max	Min	No.	α	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	α/N	cycles per mile Yield stress	153.8 50 ksi
					Max	Min							
45	-145	2	0.00015	12.2	12.6	11.1	12.6	0.880	142.5	NO DAMAGE			
45	-165	1	0.00007	12.2	12.6	10.9	12.6	0.867	128.9	NO DAMAGE			
40	30	17965	1.33334	12.2	12.5	12.5	12.5	0.994	2599.2	NO DAMAGE			
40	25	2047	0.15261	12.2	12.5	12.4	12.5	0.990	1799.5	NO DAMAGE			
40	20	18409	1.37244	12.2	12.5	12.4	12.5	0.987	1349.6	NO DAMAGE			
40	15	1038	0.07739	12.2	12.5	12.3	12.5	0.984	1079.7	NO DAMAGE			
40	10	6033	0.44978	12.2	12.5	12.3	12.5	0.981	899.7	NO DAMAGE			
40	5	221	0.01648	12.2	12.5	12.3	12.5	0.978	771.2	NO DAMAGE			
40	0	1756	0.13091	12.2	12.5	12.2	12.5	0.975	674.8	NO DAMAGE			
40	-5	10	0.00075	12.2	12.5	12.2	12.5	0.971	599.8	NO DAMAGE			
40	-10	261	0.01946	12.2	12.5	12.1	12.5	0.968	539.8	NO DAMAGE			
40	-20	31	0.00231	12.2	12.5	12.1	12.5	0.962	449.9	NO DAMAGE			
40	-25	2	0.00015	12.2	12.5	12.0	12.5	0.959	415.3	NO DAMAGE			
40	-30	18	0.00134	12.2	12.5	12.0	12.5	0.956	385.6	NO DAMAGE			
40	-40	15	0.00112	12.2	12.5	11.9	12.5	0.949	337.4	NO DAMAGE			
40	-50	21	0.00157	12.2	12.5	11.8	12.5	0.943	299.9	NO DAMAGE			
40	-60	11	0.00082	12.2	12.5	11.7	12.5	0.937	269.9	NO DAMAGE			
40	-65	1	0.00007	12.2	12.5	11.7	12.5	0.933	257.1	NO DAMAGE			
40	-70	10	0.00075	12.2	12.5	11.7	12.5	0.930	245.4	NO DAMAGE			
40	-80	8	0.00060	12.2	12.5	11.6	12.5	0.924	224.9	NO DAMAGE			
40	-90	4	0.00030	12.2	12.5	11.5	12.5	0.918	207.6	NO DAMAGE			
40	-100	3	0.00022	12.2	12.5	11.4	12.5	0.911	192.8	NO DAMAGE			
40	-110	1	0.00007	12.2	12.5	11.3	12.5	0.905	179.9	NO DAMAGE			
40	-120	3	0.00022	12.2	12.5	11.3	12.5	0.899	168.7	NO DAMAGE			
40	-130	3	0.00022	12.2	12.5	11.2	12.5	0.892	158.8	NO DAMAGE			
40	-140	1	0.00007	12.2	12.5	11.1	12.5	0.886	150.0	NO DAMAGE			
35	25	8887	0.66255	12.2	12.5	12.4	12.5	0.994	2690.7	NO DAMAGE			
35	20	2334	0.17401	12.2	12.5	12.4	12.5	0.990	1793.8	NO DAMAGE			
35	15	8440	0.62923	12.2	12.5	12.3	12.5	0.987	1345.3	NO DAMAGE			
35	10	748	0.05577	12.2	12.5	12.3	12.5	0.984	1076.3	NO DAMAGE			
35	5	2726	0.20323	12.2	12.5	12.3	12.5	0.981	896.9	NO DAMAGE			
35	0	130	0.00969	12.2	12.5	12.2	12.5	0.978	768.8	NO DAMAGE			
35	-5	46	0.00343	12.2	12.5	12.2	12.5	0.975	672.7	NO DAMAGE			
35	-10	1	0.00007	12.2	12.5	12.1	12.5	0.971	587.9	NO DAMAGE			
35	-15	10	0.00075	12.2	12.5	12.1	12.5	0.968	538.1	NO DAMAGE			
35	-20	1	0.00007	12.2	12.5	12.1	12.5	0.965	489.2	NO DAMAGE			
35	-25	15	0.00112	12.2	12.5	12.0	12.5	0.962	448.4	NO DAMAGE			
35	-35	25	0.00186	12.2	12.5	11.9	12.5	0.956	384.4	NO DAMAGE			
35	-40	1	0.00007	12.2	12.5	11.9	12.5	0.952	358.8	NO DAMAGE			
35	-45	10	0.00075	12.2	12.5	11.9	12.5	0.949	336.3	NO DAMAGE			
35	-55	2	0.00015	12.2	12.5	11.8	12.5	0.943	299.0	NO DAMAGE			
35	-65	3	0.00022	12.2	12.5	11.7	12.5	0.936	269.1	NO DAMAGE			
35	-75	1	0.00007	12.2	12.5	11.6	12.5	0.930	244.6	NO DAMAGE			
35	-85	2	0.00015	12.2	12.5	11.5	12.5	0.924	224.2	NO DAMAGE			
35	-95	3	0.00022	12.2	12.5	11.5	12.5	0.917	207.0	NO DAMAGE			
35	-100	1	0.00007	12.2	12.5	11.4	12.5	0.914	199.3	NO DAMAGE			
35	-105	4	0.00030	12.2	12.5	11.4	12.5	0.911	192.2	NO DAMAGE			
35	-115	1	0.00007	12.2	12.5	11.3	12.5	0.905	179.4	NO DAMAGE			
35	-120	1	0.00007	12.2	12.5	11.3	12.5	0.901	173.6	NO DAMAGE			
35	-170	1	0.00007	12.2	12.5	10.9	12.5	0.870	131.3	NO DAMAGE			
30	20	22074	1.64568	12.2	12.5	12.4	12.5	0.994	2682.1	NO DAMAGE			
30	15	2052	0.15298	12.2	12.5	12.3	12.5	0.990	1788.1	NO DAMAGE			
30	10	16038	1.19568	12.2	12.5	12.3	12.5	0.987	1341.1	NO DAMAGE			
30	5	628	0.04662	12.2	12.5	12.3	12.5	0.984	1072.8	NO DAMAGE			
30	0	5070	0.37796	12.2	12.5	12.2	12.5	0.981	894.0	NO DAMAGE			
30	-5	24	0.00179	12.2	12.5	12.2	12.5	0.978	786.3	NO DAMAGE			
30	-10	474	0.03534	12.2	12.5	12.1	12.5	0.974	670.5	NO DAMAGE			
30	-15	1	0.00007	12.2	12.5	12.1	12.5	0.971	596.0	NO DAMAGE			
30	-20	25	0.00186	12.2	12.5	12.1	12.5	0.968	536.4	NO DAMAGE			
30	-25	1	0.00007	12.2	12.5	12.0	12.5	0.965	487.7	NO DAMAGE			
30	-30	35	0.00261	12.2	12.5	12.0	12.5	0.962	447.0	NO DAMAGE			
30	-40	27	0.00201	12.2	12.5	11.9	12.5	0.955	383.2	NO DAMAGE			
30	-50	23	0.00171	12.2	12.5	11.8	12.5	0.949	335.3	NO DAMAGE			
30	-60	20	0.00149	12.2	12.5	11.7	12.5	0.943	298.0	NO DAMAGE			
30	-65	1	0.00007	12.2	12.5	11.7	12.5	0.939	282.3	NO DAMAGE			
30	-70	9	0.00067	12.2	12.5	11.7	12.5	0.936	268.2	NO DAMAGE			
30	-80	5	0.00037	12.2	12.5	11.6	12.5	0.930	243.8	NO DAMAGE			
30	-90	6	0.00045	12.2	12.5	11.5	12.5	0.923	223.5	NO DAMAGE			
30	-95	2	0.00015	12.2	12.5	11.5	12.5	0.920	214.6	NO DAMAGE			
30	-100	2	0.00015	12.2	12.5	11.4	12.5	0.917	206.3	NO DAMAGE			
30	-110	2	0.00015	12.2	12.5	11.3	12.5	0.911	191.6	NO DAMAGE			
30	-120	1	0.00007	12.2	12.5	11.3	12.5	0.904	178.8	NO DAMAGE			
30	-125	1	0.00007	12.2	12.5	11.2	12.5	0.901	173.0	NO DAMAGE			
30	-135	1	0.00007	12.2	12.5	11.1	12.5	0.895	162.6	NO DAMAGE			
30	-140	1	0.00007	12.2	12.5	11.1	12.5	0.892	157.8	NO DAMAGE			
30	-145	1	0.00007	12.2	12.5	11.1	12.5	0.888	153.3	NO DAMAGE			
30	-200	1	0.00007	12.2	12.5	10.6	12.5	0.853	116.6	NO DAMAGE			
30	-210	1	0.00007	12.2	12.5	10.6	12.5	0.847	111.8	NO DAMAGE			
30	-270	1	0.00007	12.2	12.5	10.1	12.5	0.809	89.4	NO DAMAGE			
25	15	9876	0.73628	12.2	12.4	12.3	12.4	0.994	2673.6	NO DAMAGE			
25	10	1825	0.13606	12.2	12.4	12.3	12.4	0.990	1782.4	NO DAMAGE			
25	5	7958	0.59329	12.2	12.4	12.3	12.4	0.987	1336.8	NO DAMAGE			
25	0	410	0.03057	12.2	12.4	12.2	12.4	0.984	1069.4	NO DAMAGE			
25	-5	105	0.00783	12.2	12.4	12.2	12.4	0.981	891.2	NO DAMAGE			
25	-10	1	0.00007	12.2	12.4	12.1	12.4	0.978	783.9	NO DAMAGE			
25	-15	33	0.00246	12.2	12.4	12.1	12.4	0.974	688.4	NO DAMAGE			
25	-20	3	0.00022	12.2	12.4	12.1	12.4	0.971	594.1	NO DAMAGE			
25	-25	317	0.02363	12.2	12.4	12.0	12.4	0.968	534.7	NO DAMAGE			

Max	Min	No.	$\alpha$ Pct	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	$\alpha/N$	cycles per mile Yield stress	153.8 50 ksi
					Max	Min							
25	-30	1	0.00007	12.2	12.4	12.0	12.4	0.965	486.1	NO DAMAGE			
25	-35	89	0.00664	12.2	12.4	11.9	12.4	0.962	445.6	NO DAMAGE			
25	-40	2	0.00015	12.2	12.4	11.9	12.4	0.958	411.3	NO DAMAGE			
25	-45	11	0.00082	12.2	12.4	11.9	12.4	0.955	381.9	NO DAMAGE			
25	-65	3	0.00022	12.2	12.4	11.7	12.4	0.942	297.1	NO DAMAGE			
25	-70	1	0.00007	12.2	12.4	11.7	12.4	0.939	281.4	NO DAMAGE			
25	-75	3	0.00022	12.2	12.4	11.6	12.4	0.936	267.4	NO DAMAGE			
25	-85	1	0.00007	12.2	12.4	11.5	12.4	0.930	243.1	NO DAMAGE			
25	-95	3	0.00022	12.2	12.4	11.5	12.4	0.923	222.8	NO DAMAGE			
25	-105	6	0.00045	12.2	12.4	11.4	12.4	0.917	205.7	NO DAMAGE			
25	-125	3	0.00022	12.2	12.4	11.2	12.4	0.904	178.2	NO DAMAGE			
25	-135	1	0.00007	12.2	12.4	11.1	12.4	0.898	167.1	NO DAMAGE			
25	-145	1	0.00007	12.2	12.4	11.1	12.4	0.891	157.3	NO DAMAGE			
25	-155	1	0.00007	12.2	12.4	11.0	12.4	0.885	148.5	NO DAMAGE			
20	10	22202	1.65522	12.2	12.4	12.3	12.4	0.994	2685.0	NO DAMAGE			
20	5	1921	0.14322	12.2	12.4	12.3	12.4	0.990	1776.7	NO DAMAGE			
20	0	21178	1.57888	12.2	12.4	12.2	12.4	0.987	1332.5	NO DAMAGE			
20	-5	101	0.00753	12.2	12.4	12.2	12.4	0.984	1066.0	NO DAMAGE			
20	-10	1141	0.08506	12.2	12.4	12.1	12.4	0.981	888.3	NO DAMAGE			
20	-15	4	0.00030	12.2	12.4	12.1	12.4	0.978	761.4	NO DAMAGE			
20	-20	49	0.00365	12.2	12.4	12.1	12.4	0.974	666.3	NO DAMAGE			
20	-25	1	0.00007	12.2	12.4	12.0	12.4	0.971	592.2	NO DAMAGE			
20	-30	47	0.00350	12.2	12.4	12.0	12.4	0.968	533.0	NO DAMAGE			
20	-40	38	0.00291	12.2	12.4	11.9	12.4	0.962	444.2	NO DAMAGE			
20	-45	1	0.00007	12.2	12.4	11.9	12.4	0.958	410.0	NO DAMAGE			
20	-50	22	0.00164	12.2	12.4	11.8	12.4	0.955	380.7	NO DAMAGE			
20	-55	1	0.00007	12.2	12.4	11.8	12.4	0.952	355.3	NO DAMAGE			
20	-60	12	0.00089	12.2	12.4	11.7	12.4	0.949	333.1	NO DAMAGE			
20	-65	1	0.00007	12.2	12.4	11.7	12.4	0.945	313.5	NO DAMAGE			
20	-70	10	0.00075	12.2	12.4	11.7	12.4	0.942	296.1	NO DAMAGE			
20	-80	10	0.00075	12.2	12.4	11.6	12.4	0.936	266.5	NO DAMAGE			
20	-85	1	0.00007	12.2	12.4	11.5	12.4	0.933	253.8	NO DAMAGE			
20	-90	6	0.00045	12.2	12.4	11.5	12.4	0.929	242.3	NO DAMAGE			
20	-100	2	0.00015	12.2	12.4	11.4	12.4	0.923	222.1	NO DAMAGE			
20	-110	2	0.00015	12.2	12.4	11.3	12.4	0.917	205.0	NO DAMAGE			
20	-130	1	0.00007	12.2	12.4	11.2	12.4	0.904	177.7	NO DAMAGE			
20	-185	1	0.00007	12.2	12.4	10.8	12.4	0.888	130.0	NO DAMAGE			
15	5	10885	0.81151	12.2	12.3	12.3	12.3	0.994	2656.5	NO DAMAGE			
15	0	1626	0.12122	12.2	12.3	12.2	12.3	0.990	1771.0	NO DAMAGE			
15	-5	1500	0.11183	12.2	12.3	12.2	12.3	0.987	1328.2	NO DAMAGE			
15	-10	1	0.00007	12.2	12.3	12.1	12.3	0.984	1062.6	NO DAMAGE			
15	-15	1448	0.10795	12.2	12.3	12.1	12.3	0.981	885.5	NO DAMAGE			
15	-20	7	0.00052	12.2	12.3	12.1	12.3	0.977	759.0	NO DAMAGE			
15	-25	657	0.04886	12.2	12.3	12.0	12.3	0.974	684.1	NO DAMAGE			
15	-30	1	0.00007	12.2	12.3	12.0	12.3	0.971	590.3	NO DAMAGE			
15	-35	14	0.00104	12.2	12.3	11.9	12.3	0.968	531.3	NO DAMAGE			
15	-40	2	0.00015	12.2	12.3	11.9	12.3	0.965	483.0	NO DAMAGE			
15	-45	5	0.00037	12.2	12.3	11.9	12.3	0.961	442.7	NO DAMAGE			
15	-55	3	0.00022	12.2	12.3	11.8	12.3	0.955	379.5	NO DAMAGE			
15	-65	3	0.00022	12.2	12.3	11.7	12.3	0.949	332.1	NO DAMAGE			
15	-70	1	0.00007	12.2	12.3	11.7	12.3	0.945	312.5	NO DAMAGE			
15	-75	1	0.00007	12.2	12.3	11.6	12.3	0.942	295.2	NO DAMAGE			
15	-80	1	0.00007	12.2	12.3	11.6	12.3	0.939	279.6	NO DAMAGE			
15	-85	3	0.00022	12.2	12.3	11.5	12.3	0.936	265.6	NO DAMAGE			
15	-95	5	0.00037	12.2	12.3	11.5	12.3	0.929	241.5	NO DAMAGE			
15	-100	1	0.00007	12.2	12.3	11.4	12.3	0.926	231.0	NO DAMAGE			
15	-105	8	0.00060	12.2	12.3	11.4	12.3	0.923	221.4	NO DAMAGE			
15	-125	2	0.00015	12.2	12.3	11.2	12.3	0.910	189.7	NO DAMAGE			
15	-155	2	0.00015	12.2	12.3	11.0	12.3	0.891	156.3	NO DAMAGE			
15	-195	1	0.00007	12.2	12.3	10.7	12.3	0.865	126.5	NO DAMAGE			
15	-235	1	0.00007	12.2	12.3	10.4	12.3	0.839	106.3	NO DAMAGE			
10	0	37244	2.77664	12.2	12.3	12.2	12.3	0.994	2647.9	NO DAMAGE			
10	-5	1213	0.08043	12.2	12.3	12.2	12.3	0.990	1785.3	NO DAMAGE			
10	-10	11887	0.88621	12.2	12.3	12.1	12.3	0.987	1324.0	NO DAMAGE			
10	-15	26	0.00194	12.2	12.3	12.1	12.3	0.984	1059.2	NO DAMAGE			
10	-20	95	0.00708	12.2	12.3	12.1	12.3	0.981	882.6	NO DAMAGE			
10	-25	2	0.00015	12.2	12.3	12.0	12.3	0.977	756.5	NO DAMAGE			
10	-30	77	0.00574	12.2	12.3	12.0	12.3	0.974	662.0	NO DAMAGE			
10	-35	3	0.00022	12.2	12.3	11.9	12.3	0.971	588.4	NO DAMAGE			
10	-40	38	0.00283	12.2	12.3	11.9	12.3	0.968	529.6	NO DAMAGE			
10	-50	25	0.00186	12.2	12.3	11.8	12.3	0.961	441.3	NO DAMAGE			
10	-55	1	0.00007	12.2	12.3	11.8	12.3	0.958	407.4	NO DAMAGE			
10	-60	7	0.00052	12.2	12.3	11.7	12.3	0.955	378.3	NO DAMAGE			
10	-70	11	0.00082	12.2	12.3	11.7	12.3	0.948	331.0	NO DAMAGE			
10	-75	2	0.00015	12.2	12.3	11.6	12.3	0.945	311.5	NO DAMAGE			
10	-80	9	0.00067	12.2	12.3	11.6	12.3	0.942	294.2	NO DAMAGE			
10	-90	7	0.00052	12.2	12.3	11.5	12.3	0.935	264.8	NO DAMAGE			
10	-95	1	0.00007	12.2	12.3	11.5	12.3	0.932	252.2	NO DAMAGE			
10	-100	6	0.00045	12.2	12.3	11.4	12.3	0.929	240.7	NO DAMAGE			
10	-110	1	0.00007	12.2	12.3	11.3	12.3	0.923	220.7	NO DAMAGE			
10	-160	1	0.00007	12.2	12.3	10.9	12.3	0.890	155.8	NO DAMAGE			
10	-175	1	0.00007	12.2	12.3	10.8	12.3	0.881	143.1	NO DAMAGE			
10	-190	2	0.00015	12.2	12.3	10.7	12.3	0.871	132.4	NO DAMAGE			
10	-255	1	0.00007	12.2	12.3	10.2	12.3	0.829	99.9	NO DAMAGE			
5	-5	8727	0.65062	12.2	12.3	12.2	12.3	0.994	2639.4	NO DAMAGE			
5	-10	15	0.00112	12.2	12.3	12.1	12.3	0.990	1759.6	NO DAMAGE			
5	-15	4923	0.36702	12.2	12.3	12.1	12.3	0.987	1319.7	NO DAMAGE			
5	-20	5	0.00037	12.2	12.3	12.1	12.3	0.984	1055.7	NO DAMAGE			

Max	Min	No.	$\alpha$ Pct	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	$\alpha/N$	cycles per mile Yield stress	153.8 50 ksi
					Max	Min							
5	-25	386	0.02878	12.2	12.3	12.0	12.3	0.981	879.8	NO DAMAGE			
5	-30	4	0.00030	12.2	12.3	12.0	12.3	0.977	754.1	NO DAMAGE			
5	-35	51	0.00360	12.2	12.3	11.9	12.3	0.974	659.8	NO DAMAGE			
5	-40	1	0.00007	12.2	12.3	11.9	12.3	0.971	586.5	NO DAMAGE			
5	-45	17	0.00127	12.2	12.3	11.9	12.3	0.968	527.9	NO DAMAGE			
5	-50	3	0.00022	12.2	12.3	11.8	12.3	0.964	479.9	NO DAMAGE			
5	-55	17	0.00127	12.2	12.3	11.8	12.3	0.961	439.9	NO DAMAGE			
5	-60	1	0.00007	12.2	12.3	11.7	12.3	0.958	406.1	NO DAMAGE			
5	-65	4	0.00030	12.2	12.3	11.7	12.3	0.955	377.1	NO DAMAGE			
5	-75	7	0.00052	12.2	12.3	11.6	12.3	0.948	329.9	NO DAMAGE			
5	-85	4	0.00030	12.2	12.3	11.5	12.3	0.942	293.3	NO DAMAGE			
5	-90	1	0.00007	12.2	12.3	11.5	12.3	0.938	277.8	NO DAMAGE			
5	-95	4	0.00030	12.2	12.3	11.5	12.3	0.935	263.9	NO DAMAGE			
5	-110	1	0.00007	12.2	12.3	11.3	12.3	0.925	229.5	NO DAMAGE			
5	-115	2	0.00015	12.2	12.3	11.3	12.3	0.922	219.9	NO DAMAGE			
5	-125	1	0.00007	12.2	12.3	11.2	12.3	0.916	203.0	NO DAMAGE			
5	-145	1	0.00007	12.2	12.3	11.1	12.3	0.903	176.0	NO DAMAGE			
5	-155	1	0.00007	12.2	12.3	11.0	12.3	0.896	165.0	NO DAMAGE			
5	-165	1	0.00007	12.2	12.3	10.9	12.3	0.890	155.3	NO DAMAGE			
5	-175	1	0.00007	12.2	12.3	10.8	12.3	0.883	146.6	NO DAMAGE			
5	-255	1	0.00007	12.2	12.3	10.2	12.3	0.832	101.5	NO DAMAGE			
5	-285	1	0.00007	12.2	12.3	10.0	12.3	0.812	91.0	NO DAMAGE			
0	-10	9883	0.73690	12.2	12.2	12.1	12.2	0.994	2630.8	NO DAMAGE			
0	-15	1462	0.11049	12.2	12.2	12.1	12.2	0.990	1753.9	NO DAMAGE			
0	-20	595	0.04436	12.2	12.2	12.1	12.2	0.987	1315.4	NO DAMAGE			
0	-25	59	0.00440	12.2	12.2	12.0	12.2	0.984	1052.3	NO DAMAGE			
0	-30	122	0.00910	12.2	12.2	12.0	12.2	0.981	876.9	NO DAMAGE			
0	-35	15	0.00112	12.2	12.2	11.9	12.2	0.977	751.7	NO DAMAGE			
0	-40	36	0.00268	12.2	12.2	11.9	12.2	0.974	657.7	NO DAMAGE			
0	-45	5	0.00037	12.2	12.2	11.9	12.2	0.971	584.6	NO DAMAGE			
0	-50	35	0.00261	12.2	12.2	11.8	12.2	0.968	526.2	NO DAMAGE			
0	-55	4	0.00030	12.2	12.2	11.8	12.2	0.964	478.3	NO DAMAGE			
0	-60	13	0.00097	12.2	12.2	11.7	12.2	0.961	438.5	NO DAMAGE			
0	-65	2	0.00015	12.2	12.2	11.7	12.2	0.958	404.7	NO DAMAGE			
0	-70	12	0.00089	12.2	12.2	11.7	12.2	0.955	375.8	NO DAMAGE			
0	-75	2	0.00015	12.2	12.2	11.6	12.2	0.951	350.8	NO DAMAGE			
0	-80	7	0.00052	12.2	12.2	11.6	12.2	0.948	328.9	NO DAMAGE			
0	-85	3	0.00022	12.2	12.2	11.5	12.2	0.945	309.5	NO DAMAGE			
0	-90	5	0.00037	12.2	12.2	11.5	12.2	0.942	292.3	NO DAMAGE			
0	-95	2	0.00015	12.2	12.2	11.5	12.2	0.938	276.9	NO DAMAGE			
0	-100	9	0.00067	12.2	12.2	11.4	12.2	0.935	263.1	NO DAMAGE			
0	-105	2	0.00015	12.2	12.2	11.4	12.2	0.932	250.6	NO DAMAGE			
0	-110	4	0.00030	12.2	12.2	11.3	12.2	0.929	239.2	NO DAMAGE			
0	-120	3	0.00022	12.2	12.2	11.3	12.2	0.922	219.2	NO DAMAGE			
0	-125	3	0.00022	12.2	12.2	11.2	12.2	0.919	210.5	NO DAMAGE			
0	-140	1	0.00007	12.2	12.2	11.1	12.2	0.909	187.9	NO DAMAGE			
0	-155	1	0.00007	12.2	12.2	11.0	12.2	0.899	169.7	NO DAMAGE			
0	-180	1	0.00007	12.2	12.2	10.8	12.2	0.883	146.2	NO DAMAGE			
-5	-15	19509	1.45445	12.2	12.2	12.1	12.2	0.993	2622.3	NO DAMAGE			
-5	-20	1685	0.12562	12.2	12.2	12.1	12.2	0.990	1748.2	NO DAMAGE			
-5	-25	7756	0.57823	12.2	12.2	12.0	12.2	0.987	1311.1	NO DAMAGE			
-5	-30	412	0.03072	12.2	12.2	12.0	12.2	0.984	1048.9	NO DAMAGE			
-5	-35	2199	0.16394	12.2	12.2	11.9	12.2	0.980	874.1	NO DAMAGE			
-5	-40	111	0.00828	12.2	12.2	11.9	12.2	0.977	749.2	NO DAMAGE			
-5	-45	789	0.05862	12.2	12.2	11.9	12.2	0.974	655.6	NO DAMAGE			
-5	-50	49	0.00365	12.2	12.2	11.8	12.2	0.971	582.7	NO DAMAGE			
-5	-55	349	0.02602	12.2	12.2	11.8	12.2	0.967	524.5	NO DAMAGE			
-5	-60	12	0.00089	12.2	12.2	11.7	12.2	0.964	476.8	NO DAMAGE			
-5	-65	127	0.00947	12.2	12.2	11.7	12.2	0.961	437.0	NO DAMAGE			
-5	-70	11	0.00082	12.2	12.2	11.7	12.2	0.958	403.4	NO DAMAGE			
-5	-75	45	0.00335	12.2	12.2	11.6	12.2	0.954	374.6	NO DAMAGE			
-5	-80	6	0.00045	12.2	12.2	11.6	12.2	0.951	349.6	NO DAMAGE			
-5	-85	41	0.00306	12.2	12.2	11.5	12.2	0.948	327.8	NO DAMAGE			
-5	-90	5	0.00037	12.2	12.2	11.5	12.2	0.945	308.5	NO DAMAGE			
-5	-95	47	0.00350	12.2	12.2	11.5	12.2	0.941	291.4	NO DAMAGE			
-5	-100	7	0.00052	12.2	12.2	11.4	12.2	0.938	276.0	NO DAMAGE			
-5	-105	13	0.00097	12.2	12.2	11.4	12.2	0.935	262.2	NO DAMAGE			
-5	-110	1	0.00007	12.2	12.2	11.3	12.2	0.932	249.7	NO DAMAGE			
-5	-115	14	0.00104	12.2	12.2	11.3	12.2	0.928	238.4	NO DAMAGE			
-5	-125	4	0.00030	12.2	12.2	11.2	12.2	0.922	218.5	NO DAMAGE			
-5	-135	3	0.00022	12.2	12.2	11.1	12.2	0.915	201.7	NO DAMAGE			
-5	-145	3	0.00022	12.2	12.2	11.1	12.2	0.909	187.3	NO DAMAGE			
-5	-155	1	0.00007	12.2	12.2	11.0	12.2	0.902	174.8	NO DAMAGE			
-5	-165	1	0.00007	12.2	12.2	10.9	12.2	0.896	163.9	NO DAMAGE			
-5	-175	1	0.00007	12.2	12.2	10.8	12.2	0.889	154.3	NO DAMAGE			
-5	-185	1	0.00007	12.2	12.2	10.8	12.2	0.883	145.7	NO DAMAGE			
-5	-205	2	0.00015	12.2	12.2	10.6	12.2	0.870	131.1	NO DAMAGE			
-5	-215	1	0.00007	12.2	12.2	10.5	12.2	0.863	124.9	NO DAMAGE			
-5	-235	1	0.00007	12.2	12.2	10.4	12.2	0.850	114.0	NO DAMAGE			
-10	-20	31560	2.35289	12.2	12.1	12.1	12.1	0.993	2613.7	NO DAMAGE			
-10	-25	5740	0.42793	12.2	12.1	12.0	12.1	0.990	1742.5	NO DAMAGE			
-10	-30	19970	1.48882	12.2	12.1	12.0	12.1	0.987	1306.9	NO DAMAGE			
-10	-35	956	0.07127	12.2	12.1	11.9	12.1	0.984	1045.5	NO DAMAGE			
-10	-40	5567	0.41504	12.2	12.1	11.9	12.1	0.980	871.2	NO DAMAGE			
-10	-45	300	0.02237	12.2	12.1	11.9	12.1	0.977	746.8	NO DAMAGE			
-10	-50	1639	0.12219	12.2	12.1	11.8	12.1	0.974	653.4	NO DAMAGE			
-10	-55	37	0.00276	12.2	12.1	11.8	12.1	0.971	580.8	NO DAMAGE			
-10	-60	645	0.04609	12.2	12.1	11.7	12.1	0.967	522.7	NO DAMAGE			

Max	Min	No.	α	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	α/N	cycles per mile Yield stress	153.8 50 ksi
					Max	Min							
-10	-65	11	0.00082	12.2	12.1	11.7	12.1	0.964	475.2	NO DAMAGE			
-10	-70	300	0.02237	12.2	12.1	11.7	12.1	0.961	435.6	NO DAMAGE			
-10	-75	2	0.00015	12.2	12.1	11.6	12.1	0.957	402.1	NO DAMAGE			
-10	-80	215	0.01603	12.2	12.1	11.6	12.1	0.954	373.4	NO DAMAGE			
-10	-85	7	0.00052	12.2	12.1	11.5	12.1	0.951	348.5	NO DAMAGE			
-10	-90	114	0.00050	12.2	12.1	11.5	12.1	0.948	326.7	NO DAMAGE			
-10	-95	1	0.00007	12.2	12.1	11.5	12.1	0.944	307.5	NO DAMAGE			
-10	-100	63	0.00470	12.2	12.1	11.4	12.1	0.941	290.4	NO DAMAGE			
-10	-105	2	0.00015	12.2	12.1	11.4	12.1	0.938	275.1	NO DAMAGE			
-10	-110	46	0.00343	12.2	12.1	11.3	12.1	0.935	261.4	NO DAMAGE			
-10	-115	3	0.00022	12.2	12.1	11.3	12.1	0.931	248.9	NO DAMAGE			
-10	-120	21	0.00157	12.2	12.1	11.3	12.1	0.928	237.6	NO DAMAGE			
-10	-125	1	0.00007	12.2	12.1	11.2	12.1	0.925	227.3	NO DAMAGE			
-10	-130	12	0.00089	12.2	12.1	11.2	12.1	0.921	217.8	NO DAMAGE			
-10	-140	6	0.00045	12.2	12.1	11.1	12.1	0.915	201.1	NO DAMAGE			
-10	-150	6	0.00045	12.2	12.1	11.0	12.1	0.908	186.7	NO DAMAGE			
-10	-155	2	0.00015	12.2	12.1	11.0	12.1	0.905	180.3	NO DAMAGE			
-10	-160	2	0.00015	12.2	12.1	10.9	12.1	0.902	174.2	NO DAMAGE			
-10	-170	5	0.00037	12.2	12.1	10.9	12.1	0.895	163.4	NO DAMAGE			
-10	-180	1	0.00007	12.2	12.1	10.8	12.1	0.889	153.7	NO DAMAGE			
-10	-190	1	0.00007	12.2	12.1	10.7	12.1	0.882	145.2	NO DAMAGE			
-10	-195	1	0.00007	12.2	12.1	10.7	12.1	0.879	141.3	NO DAMAGE			
-10	-200	1	0.00007	12.2	12.1	10.6	12.1	0.876	137.6	NO DAMAGE			
-10	-210	1	0.00007	12.2	12.1	10.6	12.1	0.869	130.7	NO DAMAGE			
-10	-220	1	0.00007	12.2	12.1	10.5	12.1	0.863	124.5	NO DAMAGE			
-15	-25	15612	1.16342	12.2	12.1	12.0	12.1	0.993	2605.2	NO DAMAGE			
-15	-30	4802	0.35800	12.2	12.1	12.0	12.1	0.990	1736.8	NO DAMAGE			
-15	-35	11214	0.83603	12.2	12.1	11.9	12.1	0.987	1302.6	NO DAMAGE			
-15	-40	1636	0.12197	12.2	12.1	11.9	12.1	0.984	1042.1	NO DAMAGE			
-15	-45	2753	0.20524	12.2	12.1	11.9	12.1	0.980	868.4	NO DAMAGE			
-15	-50	106	0.00790	12.2	12.1	11.8	12.1	0.977	744.3	NO DAMAGE			
-15	-55	686	0.05114	12.2	12.1	11.8	12.1	0.974	651.3	NO DAMAGE			
-15	-60	20	0.00149	12.2	12.1	11.7	12.1	0.970	578.9	NO DAMAGE			
-15	-65	218	0.01625	12.2	12.1	11.7	12.1	0.967	521.0	NO DAMAGE			
-15	-70	12	0.00089	12.2	12.1	11.7	12.1	0.964	473.7	NO DAMAGE			
-15	-75	106	0.00790	12.2	12.1	11.6	12.1	0.961	434.2	NO DAMAGE			
-15	-80	3	0.00022	12.2	12.1	11.6	12.1	0.957	400.8	NO DAMAGE			
-15	-85	68	0.00507	12.2	12.1	11.5	12.1	0.954	372.2	NO DAMAGE			
-15	-90	1	0.00007	12.2	12.1	11.5	12.1	0.951	347.4	NO DAMAGE			
-15	-95	28	0.00209	12.2	12.1	11.5	12.1	0.947	325.6	NO DAMAGE			
-15	-100	3	0.00022	12.2	12.1	11.4	12.1	0.944	306.5	NO DAMAGE			
-15	-105	13	0.00097	12.2	12.1	11.4	12.1	0.941	289.5	NO DAMAGE			
-15	-110	1	0.00007	12.2	12.1	11.3	12.1	0.938	274.2	NO DAMAGE			
-15	-115	5	0.00037	12.2	12.1	11.3	12.1	0.934	260.5	NO DAMAGE			
-15	-120	1	0.00007	12.2	12.1	11.3	12.1	0.931	248.1	NO DAMAGE			
-15	-125	3	0.00022	12.2	12.1	11.2	12.1	0.928	236.8	NO DAMAGE			
-15	-135	2	0.00015	12.2	12.1	11.1	12.1	0.921	217.1	NO DAMAGE			
-15	-145	4	0.00030	12.2	12.1	11.1	12.1	0.915	200.4	NO DAMAGE			
-15	-155	1	0.00007	12.2	12.1	11.0	12.1	0.908	186.1	NO DAMAGE			
-15	-160	1	0.00007	12.2	12.1	10.9	12.1	0.905	179.7	NO DAMAGE			
-15	-165	3	0.00022	12.2	12.1	10.9	12.1	0.902	173.7	NO DAMAGE			
-15	-170	2	0.00015	12.2	12.1	10.9	12.1	0.898	168.1	NO DAMAGE			
-15	-185	1	0.00007	12.2	12.1	10.8	12.1	0.888	153.2	NO DAMAGE			
-15	-205	1	0.00007	12.2	12.1	10.6	12.1	0.875	137.1	NO DAMAGE			
-15	-240	1	0.00007	12.2	12.1	10.3	12.1	0.852	115.8	NO DAMAGE			
-15	-245	1	0.00007	12.2	12.1	10.3	12.1	0.849	113.3	NO DAMAGE			
-20	-30	30520	2.27535	12.2	12.1	12.0	12.1	0.993	2596.6	NO DAMAGE			
-20	-35	6326	0.47162	12.2	12.1	11.9	12.1	0.990	1731.1	NO DAMAGE			
-20	-40	18311	1.36514	12.2	12.1	11.9	12.1	0.987	1298.3	NO DAMAGE			
-20	-45	518	0.03862	12.2	12.1	11.9	12.1	0.984	1038.6	NO DAMAGE			
-20	-50	5081	0.37880	12.2	12.1	11.8	12.1	0.980	865.5	NO DAMAGE			
-20	-55	59	0.00440	12.2	12.1	11.8	12.1	0.977	741.9	NO DAMAGE			
-20	-60	1465	0.10922	12.2	12.1	11.7	12.1	0.974	649.2	NO DAMAGE			
-20	-65	29	0.00216	12.2	12.1	11.7	12.1	0.970	577.0	NO DAMAGE			
-20	-70	431	0.03213	12.2	12.1	11.7	12.1	0.967	519.3	NO DAMAGE			
-20	-75	8	0.00060	12.2	12.1	11.6	12.1	0.964	472.1	NO DAMAGE			
-20	-80	196	0.01461	12.2	12.1	11.6	12.1	0.960	432.8	NO DAMAGE			
-20	-85	3	0.00022	12.2	12.1	11.5	12.1	0.957	399.5	NO DAMAGE			
-20	-90	52	0.00388	12.2	12.1	11.5	12.1	0.954	370.9	NO DAMAGE			
-20	-95	2	0.00015	12.2	12.1	11.5	12.1	0.951	346.2	NO DAMAGE			
-20	-100	34	0.00253	12.2	12.1	11.4	12.1	0.947	324.6	NO DAMAGE			
-20	-110	11	0.00082	12.2	12.1	11.3	12.1	0.941	288.5	NO DAMAGE			
-20	-120	13	0.00097	12.2	12.1	11.3	12.1	0.934	259.7	NO DAMAGE			
-20	-130	4	0.00030	12.2	12.1	11.2	12.1	0.928	236.1	NO DAMAGE			
-20	-150	1	0.00007	12.2	12.1	11.0	12.1	0.914	199.7	NO DAMAGE			
-20	-155	1	0.00007	12.2	12.1	11.0	12.1	0.911	192.3	NO DAMAGE			
-20	-160	3	0.00022	12.2	12.1	10.9	12.1	0.908	185.5	NO DAMAGE			
-20	-170	1	0.00007	12.2	12.1	10.9	12.1	0.901	173.1	NO DAMAGE			
-25	-35	14163	1.05589	12.2	12.0	11.9	12.0	0.993	2588.1	NO DAMAGE			
-25	-40	2509	0.18705	12.2	12.0	11.9	12.0	0.990	1725.4	NO DAMAGE			
-25	-45	7096	0.52903	12.2	12.0	11.9	12.0	0.987	1294.0	NO DAMAGE			
-25	-50	460	0.03429	12.2	12.0	11.8	12.0	0.983	1035.2	NO DAMAGE			
-25	-55	2477	0.18467	12.2	12.0	11.8	12.0	0.980	862.7	NO DAMAGE			
-25	-60	92	0.00686	12.2	12.0	11.7	12.0	0.977	739.4	NO DAMAGE			
-25	-65	885	0.06598	12.2	12.0	11.7	12.0	0.974	647.0	NO DAMAGE			
-25	-70	46	0.00343	12.2	12.0	11.7	12.0	0.970	575.1	NO DAMAGE			
-25	-75	446	0.03325	12.2	12.0	11.6	12.0	0.967	517.6	NO DAMAGE			
-25	-80	10	0.00075	12.2	12.0	11.6	12.0	0.964	470.6	NO DAMAGE			

Max	Min	No.	α	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	α/N	cycles per mile Yield stress	153.8 50 ksi
					Max	Min							
-25	-85	155	0.01156	12.2	12.0	11.5	12.0	0.960	431.3	NO DAMAGE			
-25	-90	4	0.00030	12.2	12.0	11.5	12.0	0.957	398.2	NO DAMAGE			
-25	-95	55	0.00410	12.2	12.0	11.5	12.0	0.954	369.7	NO DAMAGE			
-25	-100	1	0.00007	12.2	12.0	11.4	12.0	0.950	345.1	NO DAMAGE			
-25	-105	13	0.00097	12.2	12.0	11.4	12.0	0.947	323.5	NO DAMAGE			
-25	-115	10	0.00075	12.2	12.0	11.3	12.0	0.941	287.6	NO DAMAGE			
-25	-120	2	0.00015	12.2	12.0	11.3	12.0	0.937	272.4	NO DAMAGE			
-25	-125	9	0.00067	12.2	12.0	11.2	12.0	0.934	258.8	NO DAMAGE			
-25	-135	2	0.00015	12.2	12.0	11.1	12.0	0.927	235.3	NO DAMAGE			
-25	-145	2	0.00015	12.2	12.0	11.1	12.0	0.921	215.7	NO DAMAGE			
-25	-155	3	0.00022	12.2	12.0	11.0	12.0	0.914	199.1	NO DAMAGE			
-25	-165	1	0.00007	12.2	12.0	10.9	12.0	0.907	184.9	NO DAMAGE			
-25	-180	1	0.00007	12.2	12.0	10.8	12.0	0.898	167.0	NO DAMAGE			
-25	-205	1	0.00007	12.2	12.0	10.6	12.0	0.881	143.8	NO DAMAGE			
-25	-225	1	0.00007	12.2	12.0	10.4	12.0	0.868	129.4	NO DAMAGE			
-25	-235	1	0.00007	12.2	12.0	10.4	12.0	0.861	123.2	NO DAMAGE			
-30	-40	19532	1.45616	12.2	12.0	11.9	12.0	0.993	2579.5	NO DAMAGE			
-30	-45	2909	0.21687	12.2	12.0	11.9	12.0	0.990	1719.7	NO DAMAGE			
-30	-50	13716	1.02257	12.2	12.0	11.8	12.0	0.987	1289.8	NO DAMAGE			
-30	-55	553	0.04123	12.2	12.0	11.8	12.0	0.983	1031.8	NO DAMAGE			
-30	-60	3849	0.28695	12.2	12.0	11.7	12.0	0.980	859.8	NO DAMAGE			
-30	-65	168	0.01252	12.2	12.0	11.7	12.0	0.977	737.0	NO DAMAGE			
-30	-70	1165	0.08685	12.2	12.0	11.7	12.0	0.973	644.9	NO DAMAGE			
-30	-75	39	0.00291	12.2	12.0	11.6	12.0	0.970	573.2	NO DAMAGE			
-30	-80	266	0.01983	12.2	12.0	11.6	12.0	0.967	515.9	NO DAMAGE			
-30	-85	5	0.00037	12.2	12.0	11.5	12.0	0.964	469.0	NO DAMAGE			
-30	-90	68	0.00507	12.2	12.0	11.5	12.0	0.960	429.9	NO DAMAGE			
-30	-95	2	0.00015	12.2	12.0	11.5	12.0	0.957	396.8	NO DAMAGE			
-30	-100	35	0.00261	12.2	12.0	11.4	12.0	0.954	368.5	NO DAMAGE			
-30	-110	12	0.00089	12.2	12.0	11.3	12.0	0.947	322.4	NO DAMAGE			
-30	-120	3	0.00022	12.2	12.0	11.3	12.0	0.940	286.6	NO DAMAGE			
-30	-125	1	0.00007	12.2	12.0	11.2	12.0	0.937	271.5	NO DAMAGE			
-30	-130	5	0.00037	12.2	12.0	11.2	12.0	0.934	258.0	NO DAMAGE			
-30	-140	5	0.00037	12.2	12.0	11.1	12.0	0.927	234.5	NO DAMAGE			
-30	-145	2	0.00015	12.2	12.0	11.1	12.0	0.924	224.3	NO DAMAGE			
-30	-150	1	0.00007	12.2	12.0	11.0	12.0	0.920	215.0	NO DAMAGE			
-30	-160	1	0.00007	12.2	12.0	10.9	12.0	0.914	198.4	NO DAMAGE			
-30	-170	1	0.00007	12.2	12.0	10.9	12.0	0.907	184.3	NO DAMAGE			
-30	-180	1	0.00007	12.2	12.0	10.8	12.0	0.901	172.0	NO DAMAGE			
-30	-190	1	0.00007	12.2	12.0	10.7	12.0	0.894	161.2	NO DAMAGE			
-30	-195	1	0.00007	12.2	12.0	10.7	12.0	0.891	156.3	NO DAMAGE			
-30	-200	1	0.00007	12.2	12.0	10.6	12.0	0.887	151.7	NO DAMAGE			
-30	-215	1	0.00007	12.2	12.0	10.5	12.0	0.877	139.4	NO DAMAGE			
-30	-255	1	0.00007	12.2	12.0	10.2	12.0	0.851	114.6	NO DAMAGE			
-35	-45	12272	0.91491	12.2	11.9	11.9	11.9	0.993	2571.0	NO DAMAGE			
-35	-50	2344	0.17475	12.2	11.9	11.8	11.9	0.990	1714.0	NO DAMAGE			
-35	-55	8732	0.65099	12.2	11.9	11.8	11.9	0.987	1285.5	NO DAMAGE			
-35	-60	676	0.05040	12.2	11.9	11.7	11.9	0.983	1028.4	NO DAMAGE			
-35	-65	3860	0.28777	12.2	11.9	11.7	11.9	0.980	857.0	NO DAMAGE			
-35	-70	154	0.01148	12.2	11.9	11.7	11.9	0.977	734.6	NO DAMAGE			
-35	-75	1443	0.10758	12.2	11.9	11.6	11.9	0.973	642.7	NO DAMAGE			
-35	-80	32	0.00239	12.2	11.9	11.6	11.9	0.970	571.3	NO DAMAGE			
-35	-85	453	0.03377	12.2	11.9	11.5	11.9	0.967	514.2	NO DAMAGE			
-35	-90	6	0.00045	12.2	11.9	11.5	11.9	0.963	467.4	NO DAMAGE			
-35	-95	105	0.00783	12.2	11.9	11.5	11.9	0.960	428.5	NO DAMAGE			
-35	-100	4	0.00030	12.2	11.9	11.4	11.9	0.957	395.5	NO DAMAGE			
-35	-105	28	0.00209	12.2	11.9	11.4	11.9	0.953	367.3	NO DAMAGE			
-35	-115	14	0.00104	12.2	11.9	11.3	11.9	0.947	321.4	NO DAMAGE			
-35	-120	1	0.00007	12.2	11.9	11.3	11.9	0.943	302.5	NO DAMAGE			
-35	-125	4	0.00030	12.2	11.9	11.2	11.9	0.940	285.7	NO DAMAGE			
-35	-130	1	0.00007	12.2	11.9	11.2	11.9	0.937	270.6	NO DAMAGE			
-35	-135	5	0.00037	12.2	11.9	11.1	11.9	0.933	257.1	NO DAMAGE			
-35	-150	1	0.00007	12.2	11.9	11.0	11.9	0.924	223.6	NO DAMAGE			
-35	-165	2	0.00015	12.2	11.9	10.9	11.9	0.914	197.8	NO DAMAGE			
-35	-175	1	0.00007	12.2	11.9	10.8	11.9	0.907	183.6	NO DAMAGE			
-35	-180	1	0.00007	12.2	11.9	10.8	11.9	0.904	177.3	NO DAMAGE			
-35	-215	1	0.00007	12.2	11.9	10.5	11.9	0.880	142.8	NO DAMAGE			
-40	-50	14077	1.04948	12.2	11.9	11.8	11.9	0.993	2562.4	NO DAMAGE			
-40	-55	2298	0.17132	12.2	11.9	11.8	11.9	0.990	1708.3	NO DAMAGE			
-40	-60	10806	0.80562	12.2	11.9	11.7	11.9	0.987	1281.2	NO DAMAGE			
-40	-65	770	0.05741	12.2	11.9	11.7	11.9	0.983	1025.0	NO DAMAGE			
-40	-70	2852	0.21262	12.2	11.9	11.7	11.9	0.980	854.1	NO DAMAGE			
-40	-75	135	0.01006	12.2	11.9	11.6	11.9	0.977	732.1	NO DAMAGE			
-40	-80	567	0.04227	12.2	11.9	11.6	11.9	0.973	640.6	NO DAMAGE			
-40	-85	32	0.00239	12.2	11.9	11.5	11.9	0.970	569.4	NO DAMAGE			
-40	-90	154	0.01148	12.2	11.9	11.5	11.9	0.967	512.5	NO DAMAGE			
-40	-95	8	0.00060	12.2	11.9	11.5	11.9	0.963	465.9	NO DAMAGE			
-40	-100	43	0.00321	12.2	11.9	11.4	11.9	0.960	427.1	NO DAMAGE			
-40	-105	5	0.00037	12.2	11.9	11.4	11.9	0.957	394.2	NO DAMAGE			
-40	-110	13	0.00097	12.2	11.9	11.3	11.9	0.953	366.1	NO DAMAGE			
-40	-115	2	0.00015	12.2	11.9	11.3	11.9	0.950	341.7	NO DAMAGE			
-40	-120	7	0.00052	12.2	11.9	11.3	11.9	0.947	320.3	NO DAMAGE			
-40	-125	1	0.00007	12.2	11.9	11.2	11.9	0.943	301.5	NO DAMAGE			
-40	-130	7	0.00052	12.2	11.9	11.2	11.9	0.940	284.7	NO DAMAGE			
-40	-140	2	0.00015	12.2	11.9	11.1	11.9	0.933	256.2	NO DAMAGE			
-40	-160	2	0.00015	12.2	11.9	10.9	11.9	0.920	213.5	NO DAMAGE			
-40	-165	1	0.00007	12.2	11.9	10.9	11.9	0.917	205.0	NO DAMAGE			
-40	-180	1	0.00007	12.2	11.9	10.8	11.9	0.907	183.0	NO DAMAGE			

Max	Min	No.	α Pct	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	α/N	cycles per mile Yield stress	153.8 50 ksi
					Max	Min							
-45	-55	13228	0.98618	12.2	11.9	11.8	11.9	0.993	2553.9	NO DAMAGE			
-45	-60	2591	0.19317	12.2	11.9	11.7	11.9	0.990	1702.6	NO DAMAGE			
-45	-65	13577	1.01220	12.2	11.8	11.7	11.9	0.987	1276.9	NO DAMAGE			
-45	-70	751	0.05599	12.2	11.9	11.7	11.9	0.983	1021.5	NO DAMAGE			
-45	-75	4721	0.35196	12.2	11.9	11.6	11.9	0.980	851.3	NO DAMAGE			
-45	-80	159	0.01185	12.2	11.9	11.6	11.9	0.977	729.7	NO DAMAGE			
-45	-85	1270	0.09468	12.2	11.9	11.5	11.9	0.973	638.5	NO DAMAGE			
-45	-90	32	0.00239	12.2	11.9	11.5	11.9	0.970	567.5	NO DAMAGE			
-45	-95	224	0.01670	12.2	11.9	11.5	11.9	0.967	510.8	NO DAMAGE			
-45	-100	7	0.00052	12.2	11.9	11.4	11.9	0.963	464.3	NO DAMAGE			
-45	-105	59	0.00440	12.2	11.9	11.4	11.9	0.960	425.6	NO DAMAGE			
-45	-110	6	0.00045	12.2	11.9	11.3	11.9	0.956	392.9	NO DAMAGE			
-45	-115	31	0.00231	12.2	11.9	11.3	11.9	0.953	364.8	NO DAMAGE			
-45	-120	5	0.00037	12.2	11.9	11.3	11.9	0.950	340.5	NO DAMAGE			
-45	-125	12	0.00089	12.2	11.9	11.2	11.9	0.946	319.2	NO DAMAGE			
-45	-135	7	0.00052	12.2	11.9	11.1	11.9	0.940	283.8	NO DAMAGE			
-45	-145	3	0.00022	12.2	11.9	11.1	11.9	0.933	255.4	NO DAMAGE			
-45	-175	1	0.00007	12.2	11.9	10.8	11.9	0.913	196.5	NO DAMAGE			
-45	-215	1	0.00007	12.2	11.9	10.5	11.9	0.886	150.2	NO DAMAGE			
-45	-230	1	0.00007	12.2	11.9	10.4	11.9	0.876	138.0	NO DAMAGE			
-50	-60	13667	1.01891	12.2	11.8	11.7	11.8	0.993	2545.3	NO DAMAGE			
-50	-65	2746	0.20472	12.2	11.8	11.7	11.8	0.990	1696.9	NO DAMAGE			
-50	-70	9049	0.67455	12.2	11.8	11.7	11.8	0.987	1272.7	NO DAMAGE			
-50	-75	799	0.05967	12.2	11.8	11.6	11.8	0.983	1018.1	NO DAMAGE			
-50	-80	1862	0.13882	12.2	11.8	11.6	11.8	0.980	848.4	NO DAMAGE			
-50	-85	159	0.01185	12.2	11.8	11.5	11.8	0.976	727.2	NO DAMAGE			
-50	-90	403	0.03004	12.2	11.8	11.5	11.8	0.973	636.3	NO DAMAGE			
-50	-95	32	0.00239	12.2	11.8	11.5	11.8	0.970	565.6	NO DAMAGE			
-50	-100	122	0.00910	12.2	11.8	11.4	11.8	0.966	509.1	NO DAMAGE			
-50	-105	12	0.00089	12.2	11.8	11.4	11.8	0.963	462.8	NO DAMAGE			
-50	-110	33	0.00246	12.2	11.8	11.3	11.8	0.960	424.2	NO DAMAGE			
-50	-115	2	0.00015	12.2	11.8	11.3	11.8	0.956	391.6	NO DAMAGE			
-50	-120	11	0.00062	12.2	11.8	11.3	11.8	0.953	363.6	NO DAMAGE			
-50	-125	2	0.00015	12.2	11.8	11.2	11.8	0.950	339.4	NO DAMAGE			
-50	-130	5	0.00037	12.2	11.8	11.2	11.8	0.946	318.2	NO DAMAGE			
-50	-135	1	0.00007	12.2	11.8	11.1	11.8	0.943	299.4	NO DAMAGE			
-50	-140	2	0.00015	12.2	11.8	11.1	11.8	0.940	282.8	NO DAMAGE			
-50	-150	1	0.00007	12.2	11.8	11.0	11.8	0.933	254.5	NO DAMAGE			
-50	-160	3	0.00022	12.2	11.8	10.9	11.8	0.926	231.4	NO DAMAGE			
-50	-170	1	0.00007	12.2	11.8	10.9	11.8	0.919	212.1	NO DAMAGE			
-50	-180	2	0.00015	12.2	11.8	10.8	11.8	0.913	195.8	NO DAMAGE			
-50	-215	1	0.00007	12.2	11.8	10.5	11.8	0.889	154.3	NO DAMAGE			
-55	-65	16459	1.22706	12.2	11.8	11.7	11.8	0.993	2536.8	NO DAMAGE			
-55	-70	2658	0.19816	12.2	11.8	11.7	11.8	0.990	1691.2	NO DAMAGE			
-55	-75	14709	1.09660	12.2	11.8	11.6	11.8	0.987	1268.4	NO DAMAGE			
-55	-80	1037	0.07731	12.2	11.8	11.6	11.8	0.983	1014.7	NO DAMAGE			
-55	-85	3097	0.23089	12.2	11.8	11.5	11.8	0.980	845.6	NO DAMAGE			
-55	-90	215	0.01603	12.2	11.8	11.5	11.8	0.976	724.8	NO DAMAGE			
-55	-95	683	0.05092	12.2	11.8	11.5	11.8	0.973	634.2	NO DAMAGE			
-55	-100	56	0.00417	12.2	11.8	11.4	11.8	0.970	563.7	NO DAMAGE			
-55	-105	306	0.02281	12.2	11.8	11.4	11.8	0.966	507.4	NO DAMAGE			
-55	-110	6	0.00045	12.2	11.8	11.3	11.8	0.963	461.2	NO DAMAGE			
-55	-115	132	0.00984	12.2	11.8	11.3	11.8	0.960	422.8	NO DAMAGE			
-55	-120	3	0.00022	12.2	11.8	11.3	11.8	0.956	390.3	NO DAMAGE			
-55	-125	30	0.00224	12.2	11.8	11.2	11.8	0.953	362.4	NO DAMAGE			
-55	-135	4	0.00030	12.2	11.8	11.1	11.8	0.946	317.1	NO DAMAGE			
-55	-145	3	0.00022	12.2	11.8	11.1	11.8	0.939	281.9	NO DAMAGE			
-55	-155	1	0.00007	12.2	11.8	11.0	11.8	0.933	253.7	NO DAMAGE			
-55	-160	1	0.00007	12.2	11.8	10.9	11.8	0.929	241.6	NO DAMAGE			
-55	-165	1	0.00007	12.2	11.8	10.9	11.8	0.926	230.6	NO DAMAGE			
-55	-195	1	0.00007	12.2	11.8	10.7	11.8	0.906	181.2	NO DAMAGE			
-55	-205	1	0.00007	12.2	11.8	10.6	11.8	0.899	169.1	NO DAMAGE			
-55	-225	1	0.00007	12.2	11.8	10.4	11.8	0.885	149.2	NO DAMAGE			
-55	-235	1	0.00007	12.2	11.8	10.4	11.8	0.879	140.9	NO DAMAGE			
-55	-270	1	0.00007	12.2	11.8	10.1	11.8	0.855	118.0	NO DAMAGE			
-60	-70	12251	0.91335	12.2	11.7	11.7	11.7	0.993	2528.2	NO DAMAGE			
-60	-75	2961	0.22075	12.2	11.7	11.6	11.7	0.990	1685.5	NO DAMAGE			
-60	-80	7155	0.53342	12.2	11.7	11.6	11.7	0.986	1264.1	NO DAMAGE			
-60	-85	1139	0.08492	12.2	11.7	11.5	11.7	0.983	1011.3	NO DAMAGE			
-60	-90	1533	0.11429	12.2	11.7	11.5	11.7	0.980	842.7	NO DAMAGE			
-60	-95	213	0.01588	12.2	11.7	11.5	11.7	0.976	722.3	NO DAMAGE			
-60	-100	311	0.02319	12.2	11.7	11.4	11.7	0.973	632.1	NO DAMAGE			
-60	-105	44	0.00328	12.2	11.7	11.4	11.7	0.970	561.8	NO DAMAGE			
-60	-110	70	0.00522	12.2	11.7	11.3	11.7	0.966	505.6	NO DAMAGE			
-60	-115	11	0.00062	12.2	11.7	11.3	11.7	0.963	459.7	NO DAMAGE			
-60	-120	23	0.00171	12.2	11.7	11.3	11.7	0.959	421.4	NO DAMAGE			
-60	-125	1	0.00007	12.2	11.7	11.2	11.7	0.956	389.0	NO DAMAGE			
-60	-130	3	0.00022	12.2	11.7	11.2	11.7	0.953	361.2	NO DAMAGE			
-60	-140	3	0.00022	12.2	11.7	11.1	11.7	0.946	316.0	NO DAMAGE			
-60	-150	1	0.00007	12.2	11.7	11.0	11.7	0.939	280.9	NO DAMAGE			
-60	-160	3	0.00022	12.2	11.7	10.9	11.7	0.932	252.8	NO DAMAGE			
-60	-170	2	0.00015	12.2	11.7	10.9	11.7	0.926	229.8	NO DAMAGE			
-60	-190	1	0.00007	12.2	11.7	10.7	11.7	0.912	194.5	NO DAMAGE			
-60	-195	1	0.00007	12.2	11.7	10.7	11.7	0.909	187.3	NO DAMAGE			
-65	-75	16359	1.21981	12.2	11.7	11.6	11.7	0.993	2519.7	NO DAMAGE			
-65	-80	3270	0.24379	12.2	11.7	11.6	11.7	0.990	1679.8	NO DAMAGE			
-65	-85	10064	0.75030	12.2	11.7	11.5	11.7	0.986	1259.8	NO DAMAGE			
-65	-90	1010	0.07530	12.2	11.7	11.5	11.7	0.983	1007.9	NO DAMAGE			

Max	Min	No.	$\alpha$ Pct	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	$\alpha/N$	cycles per mile Yield stress	153.8 50 ksi
					Max	Min							
-65	-95	2428	0.18101	12.2	11.7	11.5	11.7	0.980	839.9	NO DAMAGE			
-65	-100	173	0.01290	12.2	11.7	11.4	11.7	0.976	719.9	NO DAMAGE			
-65	-105	939	0.07001	12.2	11.7	11.4	11.7	0.973	629.9	NO DAMAGE			
-65	-110	22	0.00164	12.2	11.7	11.3	11.7	0.969	559.9	NO DAMAGE			
-65	-115	235	0.01752	12.2	11.7	11.3	11.7	0.966	503.9	NO DAMAGE			
-65	-125	34	0.00253	12.2	11.7	11.2	11.7	0.959	419.9	NO DAMAGE			
-65	-130	1	0.00007	12.2	11.7	11.2	11.7	0.956	387.6	NO DAMAGE			
-65	-135	4	0.00030	12.2	11.7	11.1	11.7	0.952	360.0	NO DAMAGE			
-65	-140	1	0.00007	12.2	11.7	11.1	11.7	0.949	336.0	NO DAMAGE			
-65	-145	4	0.00030	12.2	11.7	11.1	11.7	0.946	315.0	NO DAMAGE			
-65	-155	1	0.00007	12.2	11.7	11.0	11.7	0.939	280.0	NO DAMAGE			
-65	-160	2	0.00015	12.2	11.7	10.9	11.7	0.936	265.2	NO DAMAGE			
-65	-165	2	0.00015	12.2	11.7	10.9	11.7	0.932	252.0	NO DAMAGE			
-65	-175	2	0.00015	12.2	11.7	10.8	11.7	0.925	229.1	NO DAMAGE			
-65	-195	1	0.00007	12.2	11.7	10.7	11.7	0.912	193.8	NO DAMAGE			
-65	-205	1	0.00007	12.2	11.7	10.6	11.7	0.905	180.0	NO DAMAGE			
-65	-215	1	0.00007	12.2	11.7	10.5	11.7	0.898	168.0	NO DAMAGE			
-70	-80	10471	0.78064	12.2	11.7	11.6	11.7	0.993	2511.1	NO DAMAGE			
-70	-85	3301	0.24610	12.2	11.7	11.5	11.7	0.990	1674.1	NO DAMAGE			
-70	-90	5651	0.42130	12.2	11.7	11.5	11.7	0.986	1255.6	NO DAMAGE			
-70	-95	952	0.07097	12.2	11.7	11.5	11.7	0.983	1004.4	NO DAMAGE			
-70	-100	1144	0.08529	12.2	11.7	11.4	11.7	0.980	837.0	NO DAMAGE			
-70	-105	124	0.00924	12.2	11.7	11.4	11.7	0.976	717.5	NO DAMAGE			
-70	-110	239	0.01707	12.2	11.7	11.3	11.7	0.973	627.8	NO DAMAGE			
-70	-115	16	0.00119	12.2	11.7	11.3	11.7	0.969	558.0	NO DAMAGE			
-70	-120	40	0.00298	12.2	11.7	11.3	11.7	0.966	502.2	NO DAMAGE			
-70	-125	2	0.00015	12.2	11.7	11.2	11.7	0.963	456.6	NO DAMAGE			
-70	-130	9	0.00067	12.2	11.7	11.2	11.7	0.959	418.5	NO DAMAGE			
-70	-140	3	0.00022	12.2	11.7	11.1	11.7	0.952	358.7	NO DAMAGE			
-70	-150	2	0.00015	12.2	11.7	11.0	11.7	0.946	313.9	NO DAMAGE			
-70	-160	1	0.00007	12.2	11.7	10.9	11.7	0.939	279.0	NO DAMAGE			
-70	-165	1	0.00007	12.2	11.7	10.9	11.7	0.935	264.3	NO DAMAGE			
-70	-170	1	0.00007	12.2	11.7	10.9	11.7	0.932	251.1	NO DAMAGE			
-70	-180	2	0.00015	12.2	11.7	10.8	11.7	0.925	228.3	NO DAMAGE			
-70	-190	1	0.00007	12.2	11.7	10.7	11.7	0.918	209.3	NO DAMAGE			
-70	-200	3	0.00022	12.2	11.7	10.6	11.7	0.911	193.2	NO DAMAGE			
-75	-85	14182	1.05731	12.2	11.6	11.5	11.6	0.993	2502.6	NO DAMAGE			
-75	-90	2967	0.22120	12.2	11.6	11.5	11.6	0.990	1668.4	NO DAMAGE			
-75	-95	9334	0.69588	12.2	11.6	11.5	11.6	0.986	1251.3	NO DAMAGE			
-75	-100	735	0.05480	12.2	11.6	11.4	11.6	0.983	1001.0	NO DAMAGE			
-75	-105	2065	0.15395	12.2	11.6	11.4	11.6	0.980	834.2	NO DAMAGE			
-75	-110	86	0.00641	12.2	11.6	11.3	11.6	0.976	715.0	NO DAMAGE			
-75	-115	338	0.02520	12.2	11.6	11.3	11.6	0.973	625.6	NO DAMAGE			
-75	-120	14	0.00104	12.2	11.6	11.3	11.6	0.969	556.1	NO DAMAGE			
-75	-125	45	0.00335	12.2	11.6	11.2	11.6	0.966	500.5	NO DAMAGE			
-75	-130	3	0.00022	12.2	11.6	11.2	11.6	0.962	455.0	NO DAMAGE			
-75	-135	5	0.00037	12.2	11.6	11.1	11.6	0.959	417.1	NO DAMAGE			
-75	-140	1	0.00007	12.2	11.6	11.1	11.6	0.956	385.0	NO DAMAGE			
-75	-145	2	0.00015	12.2	11.6	11.1	11.6	0.952	357.5	NO DAMAGE			
-75	-150	1	0.00007	12.2	11.6	11.0	11.6	0.949	333.7	NO DAMAGE			
-75	-155	1	0.00007	12.2	11.6	11.0	11.6	0.945	312.8	NO DAMAGE			
-75	-160	3	0.00022	12.2	11.6	10.9	11.6	0.942	294.4	NO DAMAGE			
-75	-165	2	0.00015	12.2	11.6	10.9	11.6	0.939	278.1	NO DAMAGE			
-75	-195	2	0.00015	12.2	11.6	10.7	11.6	0.918	208.5	NO DAMAGE			
-75	-205	1	0.00007	12.2	11.6	10.6	11.6	0.911	192.5	NO DAMAGE			
-75	-215	1	0.00007	12.2	11.6	10.5	11.6	0.904	178.8	NO DAMAGE			
-80	-90	8101	0.60395	12.2	11.6	11.5	11.6	0.993	2494.0	NO DAMAGE			
-80	-95	2409	0.17960	12.2	11.6	11.5	11.6	0.990	1662.7	NO DAMAGE			
-80	-100	3830	0.28554	12.2	11.6	11.4	11.6	0.986	1247.0	NO DAMAGE			
-80	-105	649	0.04838	12.2	11.6	11.4	11.6	0.983	997.6	NO DAMAGE			
-80	-110	766	0.05711	12.2	11.6	11.3	11.6	0.979	831.3	NO DAMAGE			
-80	-115	61	0.00455	12.2	11.6	11.3	11.6	0.976	712.6	NO DAMAGE			
-80	-120	135	0.01006	12.2	11.6	11.3	11.6	0.973	623.5	NO DAMAGE			
-80	-125	1	0.00007	12.2	11.6	11.2	11.6	0.969	554.2	NO DAMAGE			
-80	-130	33	0.00246	12.2	11.6	11.2	11.6	0.966	498.8	NO DAMAGE			
-80	-135	2	0.00015	12.2	11.6	11.1	11.6	0.962	453.5	NO DAMAGE			
-80	-140	10	0.00075	12.2	11.6	11.1	11.6	0.959	415.7	NO DAMAGE			
-80	-145	2	0.00015	12.2	11.6	11.1	11.6	0.955	383.7	NO DAMAGE			
-80	-150	2	0.00015	12.2	11.6	11.0	11.6	0.952	356.3	NO DAMAGE			
-80	-170	1	0.00007	12.2	11.6	10.9	11.6	0.938	277.1	NO DAMAGE			
-80	-180	1	0.00007	12.2	11.6	10.8	11.6	0.931	249.4	NO DAMAGE			
-80	-200	1	0.00007	12.2	11.6	10.6	11.6	0.918	207.8	NO DAMAGE			
-85	-95	13290	0.99081	12.2	11.5	11.5	11.5	0.993	2485.5	NO DAMAGE			
-85	-100	2275	0.16961	12.2	11.5	11.4	11.5	0.990	1657.0	NO DAMAGE			
-85	-105	6479	0.48303	12.2	11.5	11.4	11.5	0.986	1242.7	NO DAMAGE			
-85	-110	483	0.03601	12.2	11.5	11.3	11.5	0.983	994.2	NO DAMAGE			
-85	-115	766	0.05711	12.2	11.5	11.3	11.5	0.979	828.5	NO DAMAGE			
-85	-120	50	0.00373	12.2	11.5	11.3	11.5	0.976	710.1	NO DAMAGE			
-85	-125	69	0.00514	12.2	11.5	11.2	11.5	0.972	621.4	NO DAMAGE			
-85	-130	7	0.00052	12.2	11.5	11.2	11.5	0.969	552.3	NO DAMAGE			
-85	-135	8	0.00060	12.2	11.5	11.1	11.5	0.966	497.1	NO DAMAGE			
-85	-140	2	0.00015	12.2	11.5	11.1	11.5	0.962	451.9	NO DAMAGE			
-85	-145	2	0.00015	12.2	11.5	11.1	11.5	0.959	414.2	NO DAMAGE			
-85	-150	1	0.00007	12.2	11.5	11.0	11.5	0.955	382.4	NO DAMAGE			
-85	-155	8	0.00060	12.2	11.5	11.0	11.5	0.952	355.1	NO DAMAGE			
-85	-160	1	0.00007	12.2	11.5	10.9	11.5	0.948	331.4	NO DAMAGE			
-85	-165	2	0.00015	12.2	11.5	10.9	11.5	0.945	310.7	NO DAMAGE			
-85	-175	1	0.00007	12.2	11.5	10.8	11.5	0.938	276.2	NO DAMAGE			

Max	Min	No.	α Pct	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	α/N	cycles per mile Yield stress	153.8 50 ksi
					Max	Min							
-85	-205	2	0.00015	12.2	11.5	10.6	11.5	0.917	207.1	NO DAMAGE			
-90	-100	5702	0.42510	12.2	11.5	11.4	11.5	0.993	2476.9	NO DAMAGE			
-90	-105	1616	0.12048	12.2	11.5	11.4	11.5	0.990	1651.3	NO DAMAGE			
-90	-110	2362	0.17609	12.2	11.5	11.3	11.5	0.986	1238.5	NO DAMAGE			
-90	-115	348	0.02594	12.2	11.5	11.3	11.5	0.983	990.8	NO DAMAGE			
-90	-120	508	0.03767	12.2	11.5	11.3	11.5	0.979	825.6	NO DAMAGE			
-90	-125	42	0.00313	12.2	11.5	11.2	11.5	0.976	707.7	NO DAMAGE			
-90	-130	85	0.00634	12.2	11.5	11.2	11.5	0.972	619.2	NO DAMAGE			
-90	-135	5	0.00037	12.2	11.5	11.1	11.5	0.969	550.4	NO DAMAGE			
-90	-140	17	0.00127	12.2	11.5	11.1	11.5	0.965	495.4	NO DAMAGE			
-90	-145	3	0.00022	12.2	11.5	11.1	11.5	0.962	450.3	NO DAMAGE			
-90	-150	5	0.00037	12.2	11.5	11.0	11.5	0.959	412.8	NO DAMAGE			
-90	-155	2	0.00015	12.2	11.5	11.0	11.5	0.955	381.1	NO DAMAGE			
-90	-160	6	0.00045	12.2	11.5	10.9	11.5	0.952	353.8	NO DAMAGE			
-90	-170	2	0.00015	12.2	11.5	10.9	11.5	0.945	309.6	NO DAMAGE			
-90	-180	1	0.00007	12.2	11.5	10.8	11.5	0.938	275.2	NO DAMAGE			
-90	-190	2	0.00015	12.2	11.5	10.7	11.5	0.931	247.7	NO DAMAGE			
-90	-200	1	0.00007	12.2	11.5	10.6	11.5	0.924	225.2	NO DAMAGE			
-90	-250	1	0.00007	12.2	11.5	10.2	11.5	0.890	154.8	NO DAMAGE			
-95	-105	8428	0.62833	12.2	11.5	11.4	11.5	0.993	2468.4	NO DAMAGE			
-95	-110	1303	0.09714	12.2	11.5	11.3	11.5	0.990	1645.6	NO DAMAGE			
-95	-115	3709	0.27652	12.2	11.5	11.3	11.5	0.986	1234.2	NO DAMAGE			
-95	-120	265	0.01976	12.2	11.5	11.3	11.5	0.983	987.3	NO DAMAGE			
-95	-125	319	0.02378	12.2	11.5	11.2	11.5	0.979	822.8	NO DAMAGE			
-95	-130	31	0.00231	12.2	11.5	11.2	11.5	0.976	705.2	NO DAMAGE			
-95	-135	43	0.00321	12.2	11.5	11.1	11.5	0.972	617.1	NO DAMAGE			
-95	-140	3	0.00022	12.2	11.5	11.1	11.5	0.969	548.5	NO DAMAGE			
-95	-145	6	0.00045	12.2	11.5	11.1	11.5	0.965	493.7	NO DAMAGE			
-95	-150	4	0.00030	12.2	11.5	11.0	11.5	0.962	448.8	NO DAMAGE			
-95	-155	5	0.00037	12.2	11.5	11.0	11.5	0.958	411.4	NO DAMAGE			
-95	-160	3	0.00022	12.2	11.5	10.9	11.5	0.955	379.7	NO DAMAGE			
-95	-165	3	0.00022	12.2	11.5	10.9	11.5	0.952	352.6	NO DAMAGE			
-95	-175	1	0.00007	12.2	11.5	10.8	11.5	0.945	308.5	NO DAMAGE			
-95	-195	1	0.00007	12.2	11.5	10.7	11.5	0.931	246.5	NO DAMAGE			
-95	-225	1	0.00007	12.2	11.5	10.4	11.5	0.910	189.9	NO DAMAGE			
-100	-110	4039	0.30112	12.2	11.4	11.3	11.4	0.993	2459.8	NO DAMAGE			
-100	-115	1147	0.08551	12.2	11.4	11.3	11.4	0.990	1639.9	NO DAMAGE			
-100	-120	1845	0.13755	12.2	11.4	11.3	11.4	0.986	1229.9	NO DAMAGE			
-100	-125	199	0.01484	12.2	11.4	11.2	11.4	0.983	983.9	NO DAMAGE			
-100	-130	436	0.03251	12.2	11.4	11.2	11.4	0.979	819.9	NO DAMAGE			
-100	-135	20	0.00149	12.2	11.4	11.1	11.4	0.976	702.8	NO DAMAGE			
-100	-140	67	0.00500	12.2	11.4	11.1	11.4	0.972	615.0	NO DAMAGE			
-100	-145	2	0.00015	12.2	11.4	11.1	11.4	0.969	546.6	NO DAMAGE			
-100	-150	14	0.00104	12.2	11.4	11.0	11.4	0.965	482.0	NO DAMAGE			
-100	-160	7	0.00052	12.2	11.4	10.9	11.4	0.958	410.0	NO DAMAGE			
-100	-170	1	0.00007	12.2	11.4	10.9	11.4	0.951	351.4	NO DAMAGE			
-100	-175	1	0.00007	12.2	11.4	10.8	11.4	0.948	328.0	NO DAMAGE			
-100	-180	2	0.00015	12.2	11.4	10.8	11.4	0.944	307.5	NO DAMAGE			
-100	-185	1	0.00007	12.2	11.4	10.8	11.4	0.941	289.4	NO DAMAGE			
-100	-190	1	0.00007	12.2	11.4	10.7	11.4	0.937	273.3	NO DAMAGE			
-105	-115	6351	0.47348	12.2	11.4	11.3	11.4	0.993	2451.3	NO DAMAGE			
-105	-120	994	0.07411	12.2	11.4	11.3	11.4	0.990	1634.2	NO DAMAGE			
-105	-125	2749	0.20495	12.2	11.4	11.2	11.4	0.986	1225.6	NO DAMAGE			
-105	-130	177	0.01320	12.2	11.4	11.2	11.4	0.983	980.5	NO DAMAGE			
-105	-135	305	0.02274	12.2	11.4	11.1	11.4	0.979	817.1	NO DAMAGE			
-105	-140	16	0.00119	12.2	11.4	11.1	11.4	0.976	700.4	NO DAMAGE			
-105	-145	18	0.00134	12.2	11.4	11.1	11.4	0.972	612.8	NO DAMAGE			
-105	-150	4	0.00030	12.2	11.4	11.0	11.4	0.969	544.7	NO DAMAGE			
-105	-155	4	0.00030	12.2	11.4	11.0	11.4	0.965	490.3	NO DAMAGE			
-105	-160	2	0.00015	12.2	11.4	10.9	11.4	0.962	445.7	NO DAMAGE			
-105	-165	5	0.00037	12.2	11.4	10.9	11.4	0.958	408.5	NO DAMAGE			
-105	-175	3	0.00022	12.2	11.4	10.8	11.4	0.951	350.2	NO DAMAGE			
-105	-185	2	0.00015	12.2	11.4	10.8	11.4	0.944	306.4	NO DAMAGE			
-105	-190	2	0.00015	12.2	11.4	10.7	11.4	0.941	288.4	NO DAMAGE			
-105	-195	1	0.00007	12.2	11.4	10.7	11.4	0.937	272.4	NO DAMAGE			
-105	-210	1	0.00007	12.2	11.4	10.6	11.4	0.927	233.5	NO DAMAGE			
-110	-120	3584	0.26720	12.2	11.3	11.3	11.3	0.993	2442.7	NO DAMAGE			
-110	-125	852	0.06352	12.2	11.3	11.2	11.3	0.989	1628.5	NO DAMAGE			
-110	-130	1577	0.11757	12.2	11.3	11.2	11.3	0.986	1221.4	NO DAMAGE			
-110	-135	127	0.00947	12.2	11.3	11.1	11.3	0.982	977.1	NO DAMAGE			
-110	-140	260	0.01938	12.2	11.3	11.1	11.3	0.979	814.2	NO DAMAGE			
-110	-145	13	0.00097	12.2	11.3	11.1	11.3	0.975	697.9	NO DAMAGE			
-110	-150	38	0.00283	12.2	11.3	11.0	11.3	0.972	610.7	NO DAMAGE			
-110	-155	5	0.00037	12.2	11.3	11.0	11.3	0.968	542.8	NO DAMAGE			
-110	-160	10	0.00075	12.2	11.3	10.9	11.3	0.965	488.5	NO DAMAGE			
-110	-165	1	0.00007	12.2	11.3	10.9	11.3	0.961	444.4	NO DAMAGE			
-110	-170	2	0.00015	12.2	11.3	10.9	11.3	0.958	407.1	NO DAMAGE			
-110	-175	2	0.00015	12.2	11.3	10.8	11.3	0.954	375.8	NO DAMAGE			
-110	-180	2	0.00015	12.2	11.3	10.8	11.3	0.951	349.0	NO DAMAGE			
-110	-205	2	0.00015	12.2	11.3	10.6	11.3	0.933	257.1	NO DAMAGE			
-115	-125	5236	0.39036	12.2	11.3	11.2	11.3	0.993	2434.2	NO DAMAGE			
-115	-130	840	0.06262	12.2	11.3	11.2	11.3	0.989	1622.8	NO DAMAGE			
-115	-135	1968	0.14672	12.2	11.3	11.1	11.3	0.986	1217.1	NO DAMAGE			
-115	-140	141	0.01051	12.2	11.3	11.1	11.3	0.982	973.7	NO DAMAGE			
-115	-145	136	0.01029	12.2	11.3	11.1	11.3	0.979	811.4	NO DAMAGE			
-115	-150	9	0.00067	12.2	11.3	11.0	11.3	0.975	695.5	NO DAMAGE			
-115	-155	21	0.00157	12.2	11.3	11.0	11.3	0.972	608.5	NO DAMAGE			
-115	-160	2	0.00015	12.2	11.3	10.9	11.3	0.968	540.9	NO DAMAGE			

Max	Min	No.	$\alpha$ Pct	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	$\alpha/N$	cycles per mile Yield stress	153.8 ksi
					Max	Min							
-115	-165	8	0.00060	12.2	11.3	10.9	11.3	0.965	486.8	NO DAMAGE			
-115	-170	1	0.00007	12.2	11.3	10.9	11.3	0.961	442.6	NO DAMAGE			
-115	-175	5	0.00037	12.2	11.3	10.8	11.3	0.958	405.7	NO DAMAGE			
-115	-185	1	0.00007	12.2	11.3	10.8	11.3	0.951	347.7	NO DAMAGE			
-115	-245	1	0.00007	12.2	11.3	10.3	11.3	0.909	187.2	NO DAMAGE			
-120	-130	2973	0.22165	12.2	11.3	11.2	11.3	0.993	2425.6	NO DAMAGE			
-120	-135	831	0.06195	12.2	11.3	11.1	11.3	0.989	1617.1	NO DAMAGE			
-120	-140	1120	0.08350	12.2	11.3	11.1	11.3	0.986	1212.8	NO DAMAGE			
-120	-145	100	0.00746	12.2	11.3	11.1	11.3	0.982	970.2	NO DAMAGE			
-120	-150	164	0.01223	12.2	11.3	11.0	11.3	0.979	808.5	NO DAMAGE			
-120	-155	8	0.00060	12.2	11.3	11.0	11.3	0.975	693.0	NO DAMAGE			
-120	-160	25	0.00186	12.2	11.3	10.9	11.3	0.972	606.4	NO DAMAGE			
-120	-170	2	0.00015	12.2	11.3	10.9	11.3	0.965	465.1	NO DAMAGE			
-120	-180	3	0.00022	12.2	11.3	10.8	11.3	0.958	404.3	NO DAMAGE			
-120	-190	1	0.00007	12.2	11.3	10.7	11.3	0.951	346.5	NO DAMAGE			
-120	-200	1	0.00007	12.2	11.3	10.6	11.3	0.944	303.2	NO DAMAGE			
-120	-205	1	0.00007	12.2	11.3	10.6	11.3	0.940	285.4	NO DAMAGE			
-120	-215	1	0.00007	12.2	11.3	10.5	11.3	0.933	255.3	NO DAMAGE			
-125	-135	4276	0.31879	12.2	11.2	11.1	11.2	0.993	2417.1	NO DAMAGE			
-125	-140	683	0.05092	12.2	11.2	11.1	11.2	0.989	1611.4	NO DAMAGE			
-125	-145	1552	0.11571	12.2	11.2	11.1	11.2	0.986	1208.5	NO DAMAGE			
-125	-150	97	0.00723	12.2	11.2	11.0	11.2	0.982	966.8	NO DAMAGE			
-125	-155	88	0.00656	12.2	11.2	11.0	11.2	0.979	805.7	NO DAMAGE			
-125	-160	17	0.00127	12.2	11.2	10.9	11.2	0.975	690.6	NO DAMAGE			
-125	-165	13	0.00097	12.2	11.2	10.9	11.2	0.972	604.3	NO DAMAGE			
-125	-170	4	0.00030	12.2	11.2	10.9	11.2	0.968	537.1	NO DAMAGE			
-125	-175	3	0.00022	12.2	11.2	10.8	11.2	0.965	483.4	NO DAMAGE			
-125	-180	1	0.00007	12.2	11.2	10.8	11.2	0.961	439.5	NO DAMAGE			
-125	-185	3	0.00022	12.2	11.2	10.8	11.2	0.958	402.8	NO DAMAGE			
-125	-190	1	0.00007	12.2	11.2	10.7	11.2	0.954	371.9	NO DAMAGE			
-125	-195	1	0.00007	12.2	11.2	10.7	11.2	0.950	345.3	NO DAMAGE			
-130	-140	2817	0.21002	12.2	11.2	11.1	11.2	0.993	2408.5	NO DAMAGE			
-130	-145	656	0.04891	12.2	11.2	11.1	11.2	0.989	1605.7	NO DAMAGE			
-130	-150	396	0.06690	12.2	11.2	11.0	11.2	0.986	1204.3	NO DAMAGE			
-130	-155	95	0.00708	12.2	11.2	11.0	11.2	0.982	983.4	NO DAMAGE			
-130	-160	94	0.00701	12.2	11.2	10.9	11.2	0.979	802.8	NO DAMAGE			
-130	-165	10	0.00075	12.2	11.2	10.9	11.2	0.975	688.1	NO DAMAGE			
-130	-170	15	0.00112	12.2	11.2	10.9	11.2	0.972	602.1	NO DAMAGE			
-130	-175	4	0.00030	12.2	11.2	10.8	11.2	0.968	535.2	NO DAMAGE			
-130	-180	2	0.00015	12.2	11.2	10.8	11.2	0.965	481.7	NO DAMAGE			
-130	-185	1	0.00007	12.2	11.2	10.8	11.2	0.961	437.9	NO DAMAGE			
-130	-190	2	0.00015	12.2	11.2	10.7	11.2	0.957	401.4	NO DAMAGE			
-130	-195	1	0.00007	12.2	11.2	10.7	11.2	0.954	370.5	NO DAMAGE			
-130	-220	1	0.00007	12.2	11.2	10.5	11.2	0.936	267.6	NO DAMAGE			
-130	-230	1	0.00007	12.2	11.2	10.4	11.2	0.929	240.9	NO DAMAGE			
-135	-145	3311	0.24684	12.2	11.1	11.1	11.1	0.993	2400.0	NO DAMAGE			
-135	-150	514	0.03832	12.2	11.1	11.0	11.1	0.989	1600.0	NO DAMAGE			
-135	-155	1106	0.08246	12.2	11.1	11.0	11.1	0.986	1200.0	NO DAMAGE			
-135	-160	58	0.00432	12.2	11.1	10.9	11.1	0.982	960.0	NO DAMAGE			
-135	-165	81	0.00604	12.2	11.1	10.9	11.1	0.979	800.0	NO DAMAGE			
-135	-170	10	0.00075	12.2	11.1	10.9	11.1	0.975	685.7	NO DAMAGE			
-135	-175	14	0.00104	12.2	11.1	10.8	11.1	0.971	600.0	NO DAMAGE			
-135	-180	3	0.00022	12.2	11.1	10.8	11.1	0.968	533.3	NO DAMAGE			
-135	-185	4	0.00030	12.2	11.1	10.8	11.1	0.964	480.0	NO DAMAGE			
-135	-190	1	0.00007	12.2	11.1	10.7	11.1	0.961	438.4	NO DAMAGE			
-135	-195	1	0.00007	12.2	11.1	10.7	11.1	0.957	400.0	NO DAMAGE			
-140	-150	1992	0.14851	12.2	11.1	11.0	11.1	0.993	2391.4	NO DAMAGE			
-140	-155	454	0.03385	12.2	11.1	11.0	11.1	0.989	1594.3	NO DAMAGE			
-140	-160	517	0.03854	12.2	11.1	10.9	11.1	0.986	1195.7	NO DAMAGE			
-140	-165	61	0.00455	12.2	11.1	10.9	11.1	0.982	956.6	NO DAMAGE			
-140	-170	54	0.00403	12.2	11.1	10.9	11.1	0.979	797.1	NO DAMAGE			
-140	-175	20	0.00149	12.2	11.1	10.8	11.1	0.975	683.3	NO DAMAGE			
-140	-180	20	0.00149	12.2	11.1	10.8	11.1	0.971	597.9	NO DAMAGE			
-140	-185	1	0.00007	12.2	11.1	10.8	11.1	0.968	531.4	NO DAMAGE			
-140	-190	1	0.00007	12.2	11.1	10.7	11.1	0.964	478.3	NO DAMAGE			
-140	-195	1	0.00007	12.2	11.1	10.7	11.1	0.961	434.8	NO DAMAGE			
-140	-200	1	0.00007	12.2	11.1	10.6	11.1	0.957	398.6	NO DAMAGE			
-140	-210	1	0.00007	12.2	11.1	10.6	11.1	0.950	341.6	NO DAMAGE			
-145	-155	2955	0.22030	12.2	11.1	11.0	11.1	0.993	2382.9	NO DAMAGE			
-145	-160	431	0.03213	12.2	11.1	10.9	11.1	0.989	1588.6	NO DAMAGE			
-145	-165	765	0.05703	12.2	11.1	10.9	11.1	0.986	1191.4	NO DAMAGE			
-145	-170	78	0.00582	12.2	11.1	10.9	11.1	0.982	953.1	NO DAMAGE			
-145	-175	50	0.00373	12.2	11.1	10.8	11.1	0.978	794.3	NO DAMAGE			
-145	-180	16	0.00119	12.2	11.1	10.8	11.1	0.975	680.8	NO DAMAGE			
-145	-185	6	0.00045	12.2	11.1	10.8	11.1	0.971	595.7	NO DAMAGE			
-145	-190	4	0.00030	12.2	11.1	10.7	11.1	0.968	529.5	NO DAMAGE			
-145	-195	8	0.00060	12.2	11.1	10.7	11.1	0.964	476.6	NO DAMAGE			
-145	-205	2	0.00015	12.2	11.1	10.6	11.1	0.957	397.1	NO DAMAGE			
-145	-225	1	0.00007	12.2	11.1	10.4	11.1	0.943	297.9	NO DAMAGE			
-150	-160	1535	0.11444	12.2	11.0	10.9	11.0	0.993	2374.3	NO DAMAGE			
-150	-165	428	0.03191	12.2	11.0	10.9	11.0	0.989	1582.9	NO DAMAGE			
-150	-170	353	0.02632	12.2	11.0	10.9	11.0	0.986	1187.2	NO DAMAGE			
-150	-175	44	0.00328	12.2	11.0	10.8	11.0	0.982	949.7	NO DAMAGE			
-150	-180	54	0.00403	12.2	11.0	10.8	11.0	0.978	791.4	NO DAMAGE			
-150	-185	5	0.00037	12.2	11.0	10.8	11.0	0.975	678.4	NO DAMAGE			
-150	-190	10	0.00075	12.2	11.0	10.7	11.0	0.971	593.6	NO DAMAGE			
-150	-195	1	0.00007	12.2	11.0	10.7	11.0	0.968	527.6	NO DAMAGE			
-150	-200	4	0.00030	12.2	11.0	10.6	11.0	0.964	474.9	NO DAMAGE			

Max	Min	No.	α Pct	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	α/N	cycles per mile Yield stress	153.8 ksi
					Max	Min							
-150	-210	2	0.00015	12.2	11.0	10.6	11.0	0.957	395.7	NO DAMAGE			
-155	-165	2322	0.17311	12.2	11.0	10.9	11.0	0.993	2365.8	NO DAMAGE			
-155	-170	392	0.02922	12.2	11.0	10.9	11.0	0.989	1577.2	NO DAMAGE			
-155	-175	511	0.03810	12.2	11.0	10.8	11.0	0.986	1192.9	NO DAMAGE			
-155	-180	47	0.00350	12.2	11.0	10.8	11.0	0.982	946.3	NO DAMAGE			
-155	-185	35	0.00261	12.2	11.0	10.8	11.0	0.978	788.6	NO DAMAGE			
-155	-190	2	0.00015	12.2	11.0	10.7	11.0	0.975	675.9	NO DAMAGE			
-155	-195	6	0.00045	12.2	11.0	10.7	11.0	0.971	591.4	NO DAMAGE			
-155	-200	1	0.00007	12.2	11.0	10.6	11.0	0.967	525.7	NO DAMAGE			
-155	-205	4	0.00030	12.2	11.0	10.6	11.0	0.964	473.2	NO DAMAGE			
-155	-210	1	0.00007	12.2	11.0	10.6	11.0	0.960	430.1	NO DAMAGE			
-155	-215	2	0.00015	12.2	11.0	10.5	11.0	0.957	394.3	NO DAMAGE			
-155	-225	1	0.00007	12.2	11.0	10.4	11.0	0.949	338.0	NO DAMAGE			
-160	-170	1521	0.11339	12.2	10.9	10.9	10.9	0.993	2357.2	NO DAMAGE			
-160	-175	311	0.02319	12.2	10.9	10.8	10.9	0.989	1571.5	NO DAMAGE			
-160	-180	371	0.02766	12.2	10.9	10.8	10.9	0.985	1178.6	NO DAMAGE			
-160	-185	35	0.00261	12.2	10.9	10.8	10.9	0.982	942.9	NO DAMAGE			
-160	-190	29	0.00216	12.2	10.9	10.7	10.9	0.978	785.7	NO DAMAGE			
-160	-200	8	0.00060	12.2	10.9	10.6	10.9	0.971	589.3	NO DAMAGE			
-160	-205	1	0.00007	12.2	10.9	10.6	10.9	0.967	523.8	NO DAMAGE			
-160	-210	4	0.00030	12.2	10.9	10.6	10.9	0.964	471.4	NO DAMAGE			
-160	-215	1	0.00007	12.2	10.9	10.5	10.9	0.960	428.6	NO DAMAGE			
-160	-220	1	0.00007	12.2	10.9	10.5	10.9	0.956	392.9	NO DAMAGE			
-160	-240	1	0.00007	12.2	10.9	10.3	10.9	0.942	294.7	NO DAMAGE			
-160	-300	1	0.00007	12.2	10.9	9.8	10.9	0.898	188.4	NO DAMAGE			
-165	-175	1805	0.13457	12.2	10.9	10.8	10.9	0.993	2348.7	NO DAMAGE			
-165	-180	295	0.02199	12.2	10.9	10.8	10.9	0.989	1565.8	NO DAMAGE			
-165	-185	382	0.02848	12.2	10.9	10.8	10.9	0.985	1174.3	NO DAMAGE			
-165	-190	19	0.00142	12.2	10.9	10.7	10.9	0.982	939.5	NO DAMAGE			
-165	-195	11	0.00082	12.2	10.9	10.7	10.9	0.978	782.9	NO DAMAGE			
-165	-200	4	0.00030	12.2	10.9	10.6	10.9	0.975	671.0	NO DAMAGE			
-165	-205	10	0.00075	12.2	10.9	10.6	10.9	0.971	587.2	NO DAMAGE			
-165	-210	1	0.00007	12.2	10.9	10.6	10.9	0.967	521.9	NO DAMAGE			
-165	-215	1	0.00007	12.2	10.9	10.5	10.9	0.964	469.7	NO DAMAGE			
-165	-225	4	0.00030	12.2	10.9	10.4	10.9	0.956	391.4	NO DAMAGE			
-165	-235	2	0.00015	12.2	10.9	10.4	10.9	0.949	335.5	NO DAMAGE			
-165	-245	1	0.00007	12.2	10.9	10.3	10.9	0.942	293.6	NO DAMAGE			
-165	-255	1	0.00007	12.2	10.9	10.2	10.9	0.934	261.0	NO DAMAGE			
-170	-180	1099	0.08193	12.2	10.9	10.8	10.9	0.993	2340.1	NO DAMAGE			
-170	-185	240	0.01789	12.2	10.9	10.8	10.9	0.989	1560.1	NO DAMAGE			
-170	-190	237	0.01767	12.2	10.9	10.7	10.9	0.985	1170.1	NO DAMAGE			
-170	-195	21	0.00157	12.2	10.9	10.7	10.9	0.982	936.0	NO DAMAGE			
-170	-200	32	0.00239	12.2	10.9	10.6	10.9	0.978	780.0	NO DAMAGE			
-170	-205	6	0.00045	12.2	10.9	10.6	10.9	0.974	669.6	NO DAMAGE			
-170	-210	3	0.00022	12.2	10.9	10.5	10.9	0.971	585.0	NO DAMAGE			
-170	-215	3	0.00022	12.2	10.9	10.5	10.9	0.967	520.0	NO DAMAGE			
-170	-220	1	0.00007	12.2	10.9	10.5	10.9	0.963	468.0	NO DAMAGE			
-175	-185	1609	0.11996	12.2	10.8	10.8	10.8	0.993	2331.6	NO DAMAGE			
-175	-190	240	0.01789	12.2	10.8	10.7	10.8	0.989	1554.4	NO DAMAGE			
-175	-195	304	0.02266	12.2	10.8	10.7	10.8	0.985	1165.8	NO DAMAGE			
-175	-200	10	0.00075	12.2	10.8	10.6	10.8	0.982	932.6	NO DAMAGE			
-175	-205	16	0.00119	12.2	10.8	10.6	10.8	0.978	777.2	NO DAMAGE			
-175	-210	5	0.00037	12.2	10.8	10.6	10.8	0.974	666.2	NO DAMAGE			
-175	-215	6	0.00045	12.2	10.8	10.5	10.8	0.971	582.9	NO DAMAGE			
-175	-225	2	0.00015	12.2	10.8	10.4	10.8	0.963	466.3	NO DAMAGE			
-175	-235	3	0.00022	12.2	10.8	10.4	10.8	0.956	388.6	NO DAMAGE			
-175	-255	1	0.00007	12.2	10.8	10.2	10.8	0.941	291.4	NO DAMAGE			
-180	-190	1003	0.07478	12.2	10.8	10.7	10.8	0.993	2323.0	NO DAMAGE			
-180	-195	213	0.01588	12.2	10.8	10.7	10.8	0.989	1548.7	NO DAMAGE			
-180	-200	183	0.01364	12.2	10.8	10.6	10.8	0.985	1161.5	NO DAMAGE			
-180	-205	19	0.00142	12.2	10.8	10.6	10.8	0.982	929.2	NO DAMAGE			
-180	-210	18	0.00134	12.2	10.8	10.6	10.8	0.978	774.3	NO DAMAGE			
-180	-215	1	0.00007	12.2	10.8	10.5	10.8	0.974	663.7	NO DAMAGE			
-180	-220	1	0.00007	12.2	10.8	10.5	10.8	0.971	580.8	NO DAMAGE			
-180	-240	1	0.00007	12.2	10.8	10.3	10.8	0.956	387.2	NO DAMAGE			
-185	-195	1474	0.10989	12.2	10.8	10.7	10.8	0.993	2314.5	NO DAMAGE			
-185	-200	295	0.02199	12.2	10.8	10.6	10.8	0.989	1543.0	NO DAMAGE			
-185	-205	300	0.02237	12.2	10.8	10.6	10.8	0.985	1157.2	NO DAMAGE			
-185	-210	14	0.00104	12.2	10.8	10.6	10.8	0.982	925.8	NO DAMAGE			
-185	-215	15	0.00112	12.2	10.8	10.5	10.8	0.978	771.5	NO DAMAGE			
-185	-220	2	0.00015	12.2	10.8	10.5	10.8	0.974	661.3	NO DAMAGE			
-185	-225	10	0.00075	12.2	10.8	10.4	10.8	0.970	578.6	NO DAMAGE			
-185	-235	11	0.00082	12.2	10.8	10.4	10.8	0.963	462.9	NO DAMAGE			
-185	-245	2	0.00015	12.2	10.8	10.3	10.8	0.956	385.7	NO DAMAGE			
-190	-200	1217	0.09073	12.2	10.7	10.6	10.7	0.993	2305.9	NO DAMAGE			
-190	-205	282	0.02102	12.2	10.7	10.6	10.7	0.989	1537.3	NO DAMAGE			
-190	-210	125	0.00932	12.2	10.7	10.6	10.7	0.985	1153.0	NO DAMAGE			
-190	-215	10	0.00075	12.2	10.7	10.5	10.7	0.981	922.4	NO DAMAGE			
-190	-220	6	0.00045	12.2	10.7	10.5	10.7	0.978	788.6	NO DAMAGE			
-190	-230	2	0.00015	12.2	10.7	10.4	10.7	0.970	576.5	NO DAMAGE			
-190	-400	1	0.00007	12.2	10.7	9.0	10.7	0.844	109.8	NO DAMAGE			
-195	-205	1915	0.14277	12.2	10.7	10.6	10.7	0.993	2297.4	NO DAMAGE			
-195	-210	306	0.02281	12.2	10.7	10.6	10.7	0.989	1531.6	NO DAMAGE			
-195	-215	280	0.02087	12.2	10.7	10.5	10.7	0.985	1148.7	NO DAMAGE			
-195	-220	2	0.00015	12.2	10.7	10.5	10.7	0.981	918.9	NO DAMAGE			
-195	-225	15	0.00112	12.2	10.7	10.4	10.7	0.978	785.8	NO DAMAGE			
-195	-235	5	0.00037	12.2	10.7	10.4	10.7	0.970	574.3	NO DAMAGE			
-195	-240	1	0.00007	12.2	10.7	10.3	10.7	0.967	510.5	NO DAMAGE			


Max	Min	No.	α Pct	Static Stress	Dynamic Stress			R Min/Max	Endurance Limit	to Failure N	α/N	cycles per mile Yield stress	153.8 ksi
					Max	Min	Adjusted						
-195	-245	5	0.00037	12.2	10.7	10.3	10.7	0.963	459.5	NO DAMAGE			
-195	-255	1	0.00007	12.2	10.7	10.2	10.7	0.955	382.9	NO DAMAGE			
-200	-210	1092	0.08141	12.2	10.6	10.6	10.6	0.993	2288.8	NO DAMAGE			
-200	-215	185	0.01379	12.2	10.6	10.5	10.6	0.989	1525.9	NO DAMAGE			
-200	-220	66	0.00492	12.2	10.6	10.5	10.6	0.985	1144.4	NO DAMAGE			
-200	-225	2	0.00015	12.2	10.6	10.4	10.6	0.981	915.5	NO DAMAGE			
-200	-230	1	0.00007	12.2	10.6	10.4	10.6	0.978	762.9	NO DAMAGE			
-205	-215	1078	0.08037	12.2	10.6	10.5	10.6	0.993	2280.3	NO DAMAGE			
-205	-220	63	0.00470	12.2	10.6	10.5	10.6	0.989	1520.2	NO DAMAGE			
-205	-225	152	0.01133	12.2	10.6	10.4	10.6	0.985	1140.1	NO DAMAGE			
-205	-230	4	0.00030	12.2	10.6	10.4	10.6	0.981	912.1	NO DAMAGE			
-205	-235	15	0.00112	12.2	10.6	10.4	10.6	0.978	760.1	NO DAMAGE			
-205	-245	15	0.00112	12.2	10.6	10.3	10.6	0.970	570.1	NO DAMAGE			
-205	-255	6	0.00045	12.2	10.6	10.2	10.6	0.963	456.1	NO DAMAGE			
-210	-220	338	0.02520	12.2	10.6	10.5	10.6	0.992	2271.7	NO DAMAGE			
-210	-225	56	0.00417	12.2	10.6	10.4	10.6	0.989	1514.5	NO DAMAGE			
-210	-230	23	0.00171	12.2	10.6	10.4	10.6	0.985	1135.9	NO DAMAGE			
-210	-240	4	0.00030	12.2	10.6	10.3	10.6	0.977	757.2	NO DAMAGE			
-210	-360	1	0.00007	12.2	10.6	9.4	10.6	0.887	151.4	NO DAMAGE			
-215	-225	503	0.03750	12.2	10.5	10.4	10.5	0.992	2263.2	NO DAMAGE			
-215	-230	11	0.00082	12.2	10.5	10.4	10.5	0.989	1508.8	NO DAMAGE			
-215	-235	172	0.01282	12.2	10.5	10.4	10.5	0.985	1131.6	NO DAMAGE			
-215	-245	29	0.00216	12.2	10.5	10.3	10.5	0.977	754.4	NO DAMAGE			
-215	-250	1	0.00007	12.2	10.5	10.2	10.5	0.974	646.6	NO DAMAGE			
-215	-255	4	0.00030	12.2	10.5	10.2	10.5	0.970	565.8	NO DAMAGE			
-220	-230	89	0.00664	12.2	10.5	10.4	10.5	0.992	2254.6	NO DAMAGE			
-220	-235	12	0.00089	12.2	10.5	10.4	10.5	0.989	1503.1	NO DAMAGE			
-220	-240	33	0.00246	12.2	10.5	10.3	10.5	0.985	1127.3	NO DAMAGE			
-220	-250	9	0.00067	12.2	10.5	10.2	10.5	0.977	751.5	NO DAMAGE			
-220	-260	1	0.00007	12.2	10.5	10.2	10.5	0.970	563.7	NO DAMAGE			
-225	-235	732	0.05457	12.2	10.4	10.4	10.4	0.992	2246.1	NO DAMAGE			
-225	-240	11	0.00082	12.2	10.4	10.3	10.4	0.989	1497.4	NO DAMAGE			
-225	-245	260	0.01938	12.2	10.4	10.3	10.4	0.985	1123.0	NO DAMAGE			
-225	-255	3	0.00022	12.2	10.4	10.2	10.4	0.977	748.7	NO DAMAGE			
-225	-260	1	0.00007	12.2	10.4	10.2	10.4	0.973	641.7	NO DAMAGE			
-225	-270	1	0.00007	12.2	10.4	10.1	10.4	0.966	499.1	NO DAMAGE			
-230	-240	86	0.00641	12.2	10.4	10.3	10.4	0.992	2237.5	NO DAMAGE			
-230	-245	12	0.00089	12.2	10.4	10.3	10.4	0.989	1491.7	NO DAMAGE			
-230	-250	14	0.00104	12.2	10.4	10.2	10.4	0.985	1118.8	NO DAMAGE			
-230	-265	1	0.00007	12.2	10.4	10.1	10.4	0.973	639.3	NO DAMAGE			
-230	-320	1	0.00007	12.2	10.4	9.7	10.4	0.931	248.6	NO DAMAGE			
-235	-245	440	0.03280	12.2	10.4	10.3	10.4	0.992	2229.0	NO DAMAGE			
-235	-250	5	0.00037	12.2	10.4	10.2	10.4	0.988	1486.0	NO DAMAGE			
-235	-255	45	0.00395	12.2	10.4	10.2	10.4	0.985	1114.5	NO DAMAGE			
-235	-260	1	0.00007	12.2	10.4	10.2	10.4	0.981	891.6	NO DAMAGE			
-235	-265	1	0.00007	12.2	10.4	10.1	10.4	0.977	743.0	NO DAMAGE			
-240	-250	42	0.00313	12.2	10.3	10.2	10.3	0.992	2220.4	NO DAMAGE			
-240	-255	2	0.00015	12.2	10.3	10.2	10.3	0.988	1480.3	NO DAMAGE			
-240	-260	8	0.00060	12.2	10.3	10.2	10.3	0.985	1110.2	NO DAMAGE			
-240	-270	2	0.00015	12.2	10.3	10.1	10.3	0.977	740.1	NO DAMAGE			
-240	-280	1	0.00007	12.2	10.3	10.0	10.3	0.969	555.1	NO DAMAGE			
-245	-255	86	0.00641	12.2	10.3	10.2	10.3	0.992	2211.9	NO DAMAGE			
-245	-260	6	0.00045	12.2	10.3	10.2	10.3	0.988	1474.6	NO DAMAGE			
-245	-265	12	0.00089	12.2	10.3	10.1	10.3	0.985	1105.9	NO DAMAGE			
-245	-270	1	0.00007	12.2	10.3	10.1	10.3	0.981	884.7	NO DAMAGE			
-250	-260	25	0.00196	12.2	10.2	10.2	10.2	0.992	2203.3	NO DAMAGE			
-250	-265	5	0.00037	12.2	10.2	10.1	10.2	0.988	1468.9	NO DAMAGE			
-250	-270	2	0.00015	12.2	10.2	10.1	10.2	0.984	1101.7	NO DAMAGE			
-250	-280	1	0.00007	12.2	10.2	10.0	10.2	0.977	734.4	NO DAMAGE			
-255	-265	49	0.00365	12.2	10.2	10.1	10.2	0.992	2194.8	NO DAMAGE			
-255	-270	8	0.00060	12.2	10.2	10.1	10.2	0.988	1463.2	NO DAMAGE			
-255	-275	6	0.00045	12.2	10.2	10.0	10.2	0.984	1097.4	NO DAMAGE			
-255	-285	1	0.00007	12.2	10.2	10.0	10.2	0.977	731.6	NO DAMAGE			
-255	-315	1	0.00007	12.2	10.2	9.7	10.2	0.953	365.8	NO DAMAGE			
-255	-335	2	0.00015	12.2	10.2	9.0	10.2	0.782	78.4	NO DAMAGE			
-260	-270	13	0.00097	12.2	10.2	10.1	10.2	0.992	2186.2	NO DAMAGE			
-260	-275	3	0.00022	12.2	10.2	10.0	10.2	0.988	1457.5	NO DAMAGE			
-260	-310	2	0.00015	12.2	10.2	9.8	10.2	0.961	437.2	NO DAMAGE			
-265	-275	22	0.00164	12.2	10.1	10.0	10.1	0.992	2177.7	NO DAMAGE			
-265	-280	3	0.00022	12.2	10.1	10.0	10.1	0.988	1451.8	NO DAMAGE			
-265	-285	1	0.00007	12.2	10.1	10.0	10.1	0.984	1088.8	NO DAMAGE			
-265	-295	1	0.00007	12.2	10.1	9.9	10.1	0.976	725.9	NO DAMAGE			
-265	-300	1	0.00007	12.2	10.1	9.8	10.1	0.973	622.2	NO DAMAGE			
-270	-280	6	0.00045	12.2	10.1	10.0	10.1	0.992	2169.1	NO DAMAGE			
-270	-285	2	0.00015	12.2	10.1	10.0	10.1	0.988	1446.1	NO DAMAGE			
-270	-290	1	0.00007	12.2	10.1	9.9	10.1	0.984	1084.6	NO DAMAGE			
-270	-295	1	0.00007	12.2	10.1	9.9	10.1	0.980	867.6	NO DAMAGE			
-275	-285	12	0.00089	12.2	10.0	10.0	10.0	0.992	2160.6	NO DAMAGE			
-275	-290	11	0.00082	12.2	10.0	9.9	10.0	0.988	1440.4	NO DAMAGE			
-275	-295	3	0.00022	12.2	10.0	9.9	10.0	0.984	1080.3	NO DAMAGE			
-275	-300	1	0.00007	12.2	10.0	9.8	10.0	0.980	864.2	NO DAMAGE			
-275	-305	1	0.00007	12.2	10.0	9.8	10.0	0.976	720.2	NO DAMAGE			
-275	-345	1	0.00007	12.2	10.0	9.5	10.0	0.945	308.7	NO DAMAGE			
-280	-290	19	0.00142	12.2	10.0	9.9	10.0	0.992	2152.0	NO DAMAGE			
-280	-295	4	0.00030	12.2	10.0	9.9	10.0	0.988	1434.7	NO DAMAGE			
-285	-295	8	0.00060	12.2	10.0	9.9	10.0	0.992	2143.5	NO DAMAGE			
-285	-300	1	0.00007	12.2	10.0	9.8	10.0	0.988	1429.0	NO DAMAGE			
-285	-315	2	0.00015	12.2	10.0	9.7	10.0	0.976	714.5	NO DAMAGE			

Max	Min	No.	α Pct	Static Stress	Dynamic Stress		Max Adjusted	R Min/Max	Endurance Limit	to Failure N	α/N	cycles per mile Yield stress	153.8 50 ksi
					Max	Min							
-285	-325	1	0.00007	12.2	10.0	9.6	10.0	0.968	535.9	NO DAMAGE			
-285	-335	4	0.00030	12.2	10.0	9.6	10.0	0.960	428.7	NO DAMAGE			
-290	-300	3	0.00022	12.2	9.9	9.8	9.9	0.992	2134.9	NO DAMAGE			
-295	-305	6	0.00045	12.2	9.9	9.8	9.9	0.992	2126.4	NO DAMAGE			
-295	-315	11	0.00082	12.2	9.9	9.7	9.9	0.984	1063.2	NO DAMAGE			
-295	-325	16	0.00119	12.2	9.9	9.6	9.9	0.976	708.8	NO DAMAGE			
-295	-335	14	0.00104	12.2	9.9	9.6	9.9	0.968	531.6	NO DAMAGE			
-300	-315	1	0.00007	12.2	9.8	9.7	9.8	0.988	1411.9	NO DAMAGE			
-305	-315	63	0.00470	12.2	9.8	9.7	9.8	0.992	2109.3	NO DAMAGE			
-305	-325	124	0.00924	12.2	9.8	9.6	9.8	0.984	1054.6	NO DAMAGE			
-305	-335	25	0.00186	12.2	9.8	9.6	9.8	0.976	703.1	NO DAMAGE			
-305	-345	8	0.00060	12.2	9.8	9.5	9.8	0.968	527.3	NO DAMAGE			
-315	-325	133	0.00992	12.2	9.7	9.6	9.7	0.992	2092.2	NO DAMAGE			
-315	-335	114	0.00850	12.2	9.7	9.6	9.7	0.984	1046.1	NO DAMAGE			
-315	-345	13	0.00097	12.2	9.7	9.5	9.7	0.975	697.4	NO DAMAGE			
-325	-335	32	0.00239	12.2	9.6	9.6	9.6	0.992	2075.1	NO DAMAGE			
-325	-345	2	0.00015	12.2	9.6	9.5	9.6	0.984	1037.5	NO DAMAGE			
-345	-385	1	0.00007	12.2	9.5	9.2	9.5	0.966	510.2	NO DAMAGE			
-355	-375	1	0.00007	12.2	9.4	9.2	9.4	0.983	1011.9	NO DAMAGE			
-365	-385	2	0.00015	12.2	9.3	9.2	9.3	0.983	1003.3	NO DAMAGE			
-375	-385	1	0.00007	12.2	9.2	9.2	9.2	0.991	1989.6	NO DAMAGE			
											Sum	4.01E+10	
											N	2.48E+09	
											Miles	1.62E+07	


**Torsional Loading**

Below are screen shots of the maximum applied torque from the AAR shown on the following page. Stress is below the endurance limit of the steel so no further analysis is necessary.

Loaded

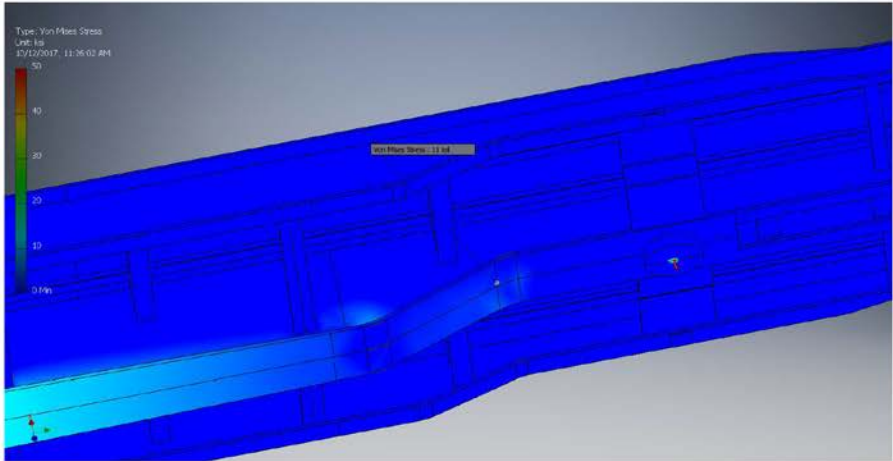

Empty

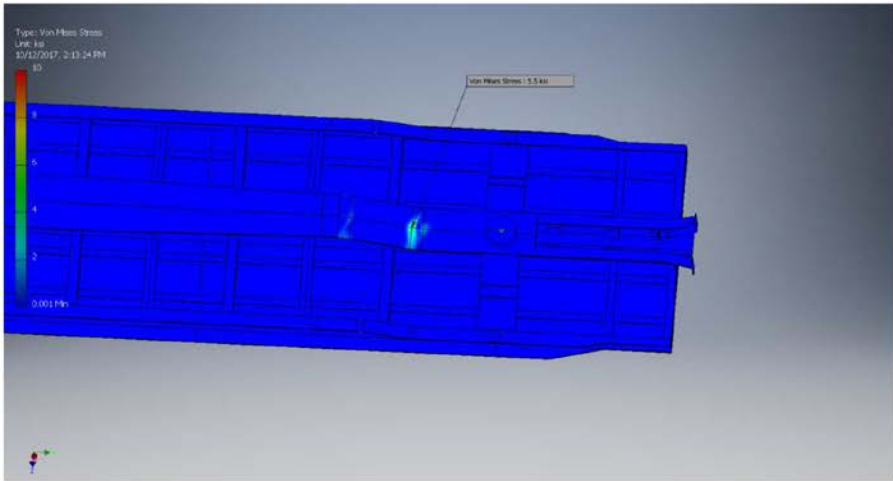

DATA FROM AAR SECTION 7.3

LOADED GONDOLA CAR BODY TWIST MOMENT DUE TO SIDE BEARING LOAD ENVIRONMENT

TEST DATE: March 2006 - Dec 2007  
 TEST MODE: Unit Train Coal Service - 286,000 lb. GRL  
 RECORDED MILEAGE: 8,480  
 TOTAL CYCLES: 6,786,405  
 AVERAGE CYCLES PER MILE: 800.3  
 AVERAGE TRAVEL SPEED: 25 mph  
 MAXIMUM SPEED: 52 mph  
 TRAVEL SPEED DISTRIBUTION:

RANGE (mph)	PERCENT AT LEVEL	
0	5	5.4
5	10	9.3
10	15	11.0
15	20	11.7
20	25	16.1
25	30	10.3
30	35	14.3
35	40	11.0
40	45	5.0
45	50	4.5
50	55	1.5

VALUES SHOWN ARE IN UNITS OF IN-KIPS.

MAX VALUE	MIN VALUE	CYCLES	PERCENT OCCURANCE
kip	kip		
2500	-1750	2	0.00003%
2500	-2000	3	0.00004%
2500	-2250	1	0.00001%
2250	-750	2	0.00003%
2250	-1000	3	0.00004%
2250	-1250	1	0.00001%
2250	-1500	1	0.00001%
2250	-1750	3	0.00004%
2250	-2000	1	0.00001%
2000	1500	2	0.00003%
2000	500	2	0.00003%
2000	0	1	0.00001%
2000	-250	2	0.00003%
2000	-500	1	0.00001%
2000	-750	2	0.00003%
2000	-1000	3	0.00004%
2000	-1250	7	0.00010%
2000	-1500	13	0.00019%
2000	-1750	8	0.00012%
2000	-2000	3	0.00004%
1750	1500	24	0.00035%
1750	1250	45	0.00066%

1750	1000	14	0.00021%
1750	750	6	0.00009%
1750	500	7	0.00010%
1750	250	7	0.00010%
1750	0	14	0.00021%
1750	-250	19	0.00028%
1750	-500	19	0.00028%
1750	-750	17	0.00025%
1750	-1000	25	0.00037%
1750	-1250	43	0.00063%
1750	-1500	28	0.00041%
1750	-1750	12	0.00018%
1750	-2000	5	0.00007%
1750	-2250	1	0.00001%
1750	-2500	1	0.00001%
1500	1250	362	0.00533%
1500	1000	409	0.00603%
1500	750	91	0.00134%
1500	500	35	0.00052%
1500	250	67	0.00099%
1500	0	62	0.00091%
1500	-250	88	0.00130%
1500	-500	73	0.00108%
1500	-750	95	0.00140%
1500	-1000	126	0.00186%
1500	-1250	108	0.00159%
1500	-1500	81	0.00119%
1500	-1750	41	0.00060%
1500	-2000	1	0.00001%
1250	1000	2300	0.03389%
1250	750	2729	0.04021%
1250	500	411	0.00606%
1250	250	292	0.00430%
1250	0	317	0.00467%
1250	-250	284	0.00418%
1250	-500	428	0.00631%
1250	-750	498	0.00734%
1250	-1000	494	0.00728%
1250	-1250	314	0.00463%
1250	-1500	150	0.00221%
1250	-1750	21	0.00031%
1000	750	10812	0.15932%
1000	500	11972	0.17641%
1000	250	2081	0.03066%
1000	0	1239	0.01826%
1000	-250	1872	0.02758%
1000	-500	2552	0.03760%
1000	-750	2496	0.03678%
1000	-1000	1297	0.01911%
1000	-1250	589	0.00868%
1000	-1500	112	0.00165%
1000	-1750	12	0.00018%
750	500	67742	0.99820%
750	250	66455	0.97924%
750	0	11782	0.17361%

750	-250	13952	0.20559%
750	-500	11564	0.17040%
750	-750	5876	0.08658%
750	-1000	2260	0.03330%
750	-1250	629	0.00927%
750	-1500	66	0.00097%
750	-1750	12	0.00018%
500	250	305999	4.50900%
500	0	815557	12.01751%
500	-250	150272	2.21431%
500	-500	32146	0.47368%
500	-750	11018	0.16235%
500	-1000	3126	0.04606%
500	-1250	407	0.00600%
500	-1500	71	0.00105%
500	-1750	5	0.00007%
500	-2000	2	0.00003%
250	0	2208739	32.54653%
250	-250	862740	12.71277%
250	-500	60276	0.88819%
250	-750	12856	0.18944%
250	-1000	2113	0.03114%
250	-1250	306	0.00451%
250	-1500	48	0.00071%
250	-1750	6	0.00009%
250	-2000	1	0.00001%
0	-250	1052114	15.50326%
0	-500	319565	4.70890%
0	-750	16203	0.23876%
0	-1000	1577	0.02324%
0	-1250	322	0.00474%
0	-1500	50	0.00074%
0	-1750	13	0.00019%
0	-2000	2	0.00003%
-250	-500	359587	5.29864%
-250	-750	166295	2.45041%
-250	-1000	2940	0.04332%
-250	-1250	227	0.00334%
-250	-1500	40	0.00059%
-250	-1750	11	0.00016%
-500	-750	120769	1.77957%
-500	-1000	19811	0.29192%
-500	-1250	522	0.00769%
-500	-1500	44	0.00065%
-500	-1750	3	0.00004%
-750	-1000	19840	0.29235%
-750	-1250	6182	0.09109%
-750	-1500	214	0.00315%
-750	-1750	6	0.00009%
-1000	-1250	5455	0.08038%
-1000	-1500	1741	0.02565%
-1000	-1750	43	0.00063%
-1250	-1500	1212	0.01786%
-1250	-1750	181	0.00267%
-1250	-2000	3	0.00004%

-1500	-1750	112	0.00165%
-1500	-2000	27	0.00040%
-1500	-2250	1	0.00001%
-1750	-2000	7	0.00010%
-2000	-2250	1	0.00001%

**APPENDIX H-2**  
**BUFFER RAILCAR SPECIAL PROCESS SPECIFICATIONS**

**APPENDIX H-2.1**  
**BUFFER RAILCAR WELDING PROCEDURE**  
**QUALIFICATIONS AND SPECIFICATIONS**

## Appendix H-2.1.1 Procedure Qualification Record Example

AWS D15.1/D15.1M:2012

ANNEX D

### PROCEDURE QUALIFICATION RECORD (PQR)

**PROCEDURE SPECIFICATION**

Material specification A572 Grade 50  
 Welding process FCAW  
 Manual or machine Both (Semi-Automatic)  
 Position of welding Vertical  
 Filler metal specification AWS A5.20  
 Filler metal classification E71T-1  
 Weld metal grade\*   
 Shielding gas CO2 Flow rate 35 cfm  
 Single or multiple pass Multiple  
 Single or multiple arc Single  
 Welding current DCEP  
 Welding progression Uphill  
 Preheat temperature 70 deg.  
 Postheat treatment N/A  
 Welder's name Triston Mills - Clock #821  
 \*Applicable when filler metal has no AWS classification.

**VISUAL INSPECTION**

Appearance Acceptable  
 Undercut NONE  
 Piping porosity NONE  
 Test date July 10, 2014  
 Witnessed by Daniel S. Gurich

**GROOVE WELD TEST RESULTS**

Tensile strength, psi  
 1. (A) 78026  
 2. (B) 77322

Guided-bend tests (2 root-, 2 face-, or 4 side-bend)

Root		Face	
1. Side-Pass		1. Side-Pass	
2. Side-Pass		2. Side-Pass	

Radiographic-ultrasonic examination  
 RT report no. N/A  
 UT report no. #256

**FILLET WELD TEST RESULTS**

Minimum size multiple pass		Maximum size single pass	
Macroetch		Macroetch	
1. <u>N/A</u>	2. <u>N/A</u>	1. <u>N/A</u>	3. <u>N/A</u>
3. <u>N/A</u>		2. <u>N/A</u>	

All-weld-metal tension test

Tensile strength, psi N/A  
 Yield point/strength, psi N/A  
 Elongation in 2 in, % N/A  
 Laboratory test no. N/A

### WELDING PROCEDURE

Pass No.	Electrode Size	Electrical Characteristics		Travel Speed	Joint Detail
		Amperes	Volts		
All	1/16"	255	26	4 ipm	See Attached:  Thickness of weld layers not to exceed 1/4"

We, the undersigned, certify that the statements in this record are correct and that the test welds were prepared, welded, and tested in accordance with the requirements of AWS D15.1: ( 2012 ) Railroad Welding Specification for Cars and Locomotives.  
(year)

Procedure no. F-001  
 Revision no. 3  
 Form D-2

Manufacturer or Contractor Kasgro Rail Corp.  
 Authorized by [Signature]  
 Date 7-10-14

## Appendix H-2.1.2 Prequalified Welding Procedure Specifications

ANNEX D

AWS D15.1/D15.1M:2012

### TEST QUALIFIED WELDING PROCEDURE SPECIFICATION (WPS)

Qualified by procedure qualification no. F-001

Material specification Class 1 & 2 (A36, A572/gr42&50, A500, gr B, A216/gr WCC, etc.)

Welding process FCAW

Manual or machine Both

Position of welding Flat, Horizontal, Vertical, Overhead

Filler metal specification A5.20

Filler metal classification E71T-1

Flux N/A

Weld metal grade\* N/A

Shielding gas CO2 Flow rate 35-60 cfm

Single or multiple pass Both

Single or multiple arc Direct

Welding current Direct

Polarity DCEP

Welding progression Vertical (3G) - Uphill

Root treatment Clean to sound metal

Preheat and interpass temperature See attached report

Postweld Heat Treatment None

\*Appl cable only when filler metal has no AWS classification.

### WELDING PROCEDURE

Pass No.	Electrode Size	Electrical Characteristics		Travel Speed	Joint Detail
		Amperes	Volts		
As	Required				See attached details          Thickness of weld layers not to exceed 1/4"
F-1G	.045"	180-280	27-32	8-13 ipm	
	1/16"	200-400	25-31	8-13 ipm	
	3/32"	250-400	17-32	6-13 ipm	
H-2G	1/16"	200-400	25-31	8-13 ipm	
	3/32"	250-400	17-32	6-13 ipm	
V-3G	.045"	160-210	24-39	4-9 ipm	
	1/16"	180-250	25-30	6-11 ipm	
O-4G	.045"	180-240	24-29	8-13 ipm	
	1/16"	200-270	26-30	8-13 ipm	

This procedure may vary due to fabrication sequence, fit-up, pass size, etc., within the limitation of variables given in AWS D15.1: ( 2012 ) Railroad Welding Specification for Cars and Locomotives.  
(year)

Procedure no. F-001

Revision no. 3

Form D-3

Manufacturer or Contractor KASGRO RAIL CORP.

Authorized by Mark Saylor

Date 11/25/13

ANNEX D

**PREQUALIFIED WELDING PROCEDURE SPECIFICATION (WPS)**

Material specification A 572 Grade 50 and A52 Grade 60  
 Welding process F.C.A.W.  
 Manual or machine Manual  
 Position of welding Flat, Horizontal, Vertical, Overhead  
 Filler metal specification A5.22  
 Filler metal classification EB1R-1 - ML-TCU H8  
 Flux N/A  
 Weld metal grade\* N/A  
 Shielding gas CO2 Flow rate 35 - 50 CFH  
 Single or multiple pass Single/Multiple  
 Single or multiple arc Single  
 Welding current Direct  
 Polarity Reverse  
 Welding progression Vertical (3G) - Uphill  
 Root treatment Clean to sound metal  
 Preheat and interpass temperature See attached report  
 Postweld Heat Treatment None None

\*Applicable only when filler metal has no AWS classification.

**WELDING PROCEDURE**

Pass No.	Electrode Size	Welding Current		Travel Speed	Joint Detail
		Amperes	Volts		
As Required					
H-1G	1/16"	200-400	25-31	8-13 ipm	* See Attached Report  Thickness of weld layers not to exceed 1/4"
H-2G	1/16"	180-250	24-39	8-13 ipm	
V-3G	1/16"	180-250	24-39	6-11 ipm	
O-4G	1/16"	200-270	26-30	8-13 ipm	

This procedure may vary due to fabrication sequence, fit-up, pass size, etc., within the limitation of variables given in AWS D18.1 (2012) Railroad Welding Specification - Cars and Locomotives.  
(Year)

Procedure no. W-002

Manufacturer or Contractor KALCRO RAIL CORP.

Revision no. 3

Authorized by [Signature]

Form D-1

Date 6-10-14

17

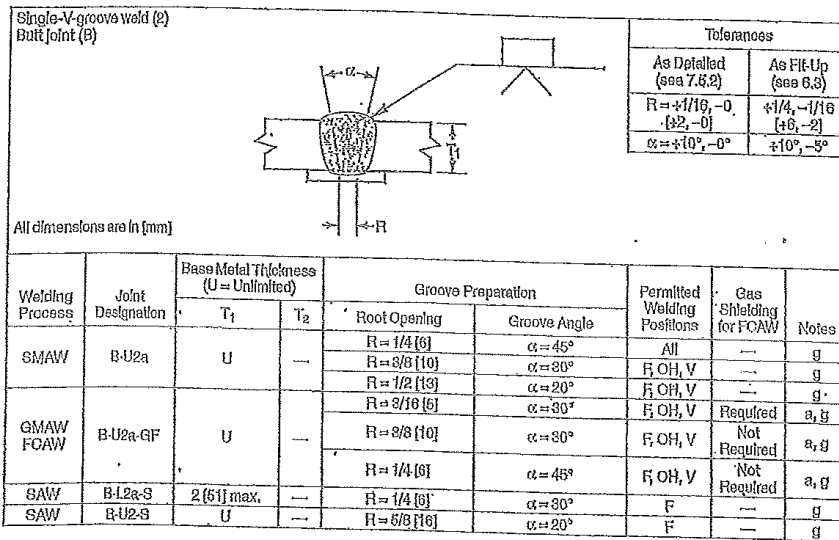


Figure 7.1B—Prequalified Complete Joint Penetration (CJP) Groove Welded Joint Details

20

TEST QUALIFIED WELDING PROCEDURE SPECIFICATION (WPS)

Material specification A572 grade 60 to A656 grade 80  
 Welding process F.C.A.M.  
 Manual or machine Manual  
 Position of welding Flat, Horizontal, Vertical, Overhead  
 Filler metal specification A5.29  
 Filler metal classification E71T1-NiClJ BB  
 Flux N/A  
 Weld metal grade N/A  
 Shielding gas CO2 Flow rate 35 to 50 CFH  
 Single or multiple pass Single/Multiple  
 Single or multiple arc Single  
 Welding current Direct  
 Polarity Reverse  
 Welding progression Vertical - Uphill  
 Root treatment Clean to sound metal  
 Preheat and interpass temperature 250° F  
 Postweld Heat Treatment None None X  
 \*Applicable only when filler metal has no AWS classification.

WELDING PROCEDURE

Pass no.	Electrode size	Welding current		Travel speed	Joint detail
		Amperes	Volts		
ALL	1/16"	See attached report		8-11 ipm	

This procedure may vary due to fabrication sequence, fit-up, pass size, etc., within the limitation of variables given in AWS D16.1, (2012).

Procedure no. E-003 Manufacturer or contractor Kasco Rail Corp  
 Revision no. 1 Authorized by [Signature]  
 Form D-1 Date 11/25/13


47

TEST QUALIFIED WELDING PROCEDURE SPECIFICATION (WPS)

Qualified by procedure qualification # 09KRC-1092  
 Material specification A514T1 to A572 Grade 60  
 Welding process E.C.A.W.  
 Manual or machine Manual  
 Position of welding Vertical  
 Filler metal specification A5.29  
 Filler metal classification E111T1-K3  
 Flux \_\_\_\_\_  
 Weld metal grade\* \_\_\_\_\_  
 Shielding gas 75% Argon 25% CO2 Flow rate 40 CFH  
 Single or multiple pass Multiple  
 Single or multiple arc Single  
 Welding current Direct  
 Polarity Reverse  
 Welding progression Uphill  
 Root treatment Clean to sound metal  
 Preheat and interpass temperature See attached report  
 Postweld Heat Treatment None

\*Applicable only when filler metal has no AWS classification.

WELDING PROCEDURE

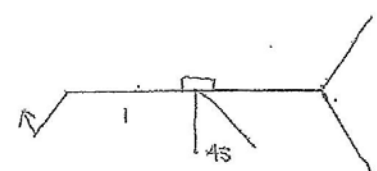Pass no.	Electrode size	Welding current		Travel speed	Joint detail
		Amperes	Volts		
All	.062"	190-300	27-30	8-11 ipm	

This procedure may vary due to fabrication sequence, fit-up, pass size, etc., within the limitation of variables given in AWS D15.1, (2012 year).

Procedure no. F-004 Manufacturer or contractor KASCRO RAIL CORP.  
 Revision no. 1 Authorized by [Signature]  
 Form D-3 Date 11/25/13

ANNEX D

AWS D15.1/D15.1M:2012

TEST QUALIFIED WELDING PROCEDURE SPECIFICATIONS (WPS)


Qualified by procedure qualification no. 08KRF-1087-6/30/08/ AND 15KR-F1087-1/14/15,  
 Material specification A572 GRADE 60 TO A240 GRADE 304  
 Welding process F.C.A.W.  
 Manual or machine Manual  
 Position of welding 1G Flat  
 Filler metal specification 5.22  
 Filler metal classification DW-309L  
 Flux \_\_\_\_\_  
 Weld metal grade\* \_\_\_\_\_  
 Shielding gas CO2, Flow rate 40-50 CFH  
 Single or multiple pass Multiple  
 Single or multiple arc Single  
 Welding current DCEP  
 Polarity Reverse  
 Welding progression Forehand  
 Root treatment Clean to sound metal  
 Preheat and Interpass temperature 50°F  
 Post weld Heat Treatment None, None x  
 \*Applicable only when filler metal has no AWS classification.

WELDING PROCEDURE

Pass No.	Electrode Size	Welding Current		Travel Speed	Joint Detail
		Amperes	Volts		
ALL	.062"	240-280	29-33	15-18 imp	

This procedure may vary due to fabrication sequence, fit-up, pass size, etc., within the limitation of variables given in AWS D15.1, ( 2012 ) Railroad Welding Specification for Cars and Locomotives.  
 (Year)

Procedure no. 08KR-F1087 Manufacturer or Contractor KASGRO RAIL CORP.  
 Revision no. 2 Authorized by [Signature]  
 Date 07/27/15

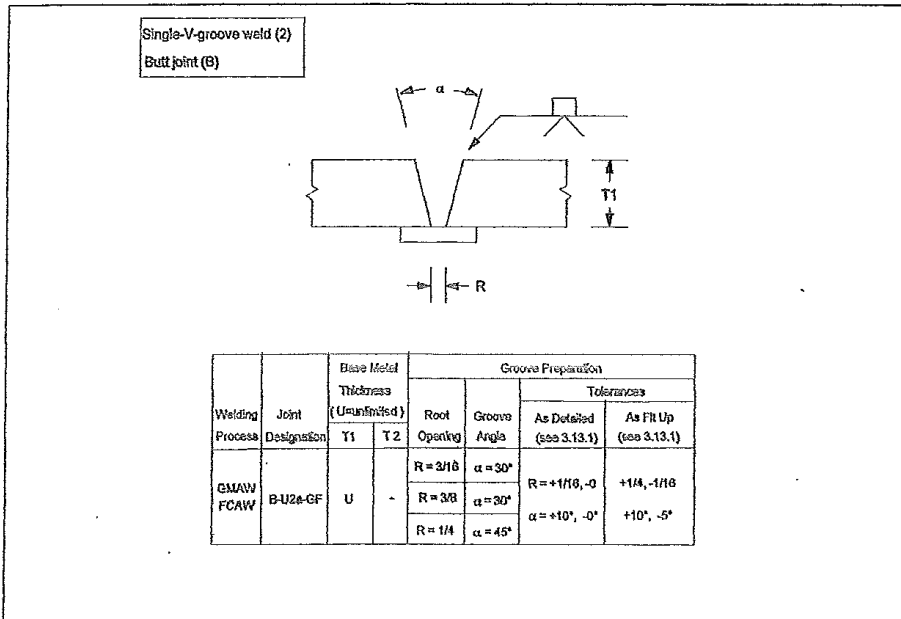


b-u2a-gf.gfl

Preheat

Less than or = to 3/4" 50 deg.  
 Over 3/4" thru 1-1/2" 150 deg.  
 Over 1-1/2" thru 2-1/2" 225 deg.  
 Over 2-1/2" 300 deg.



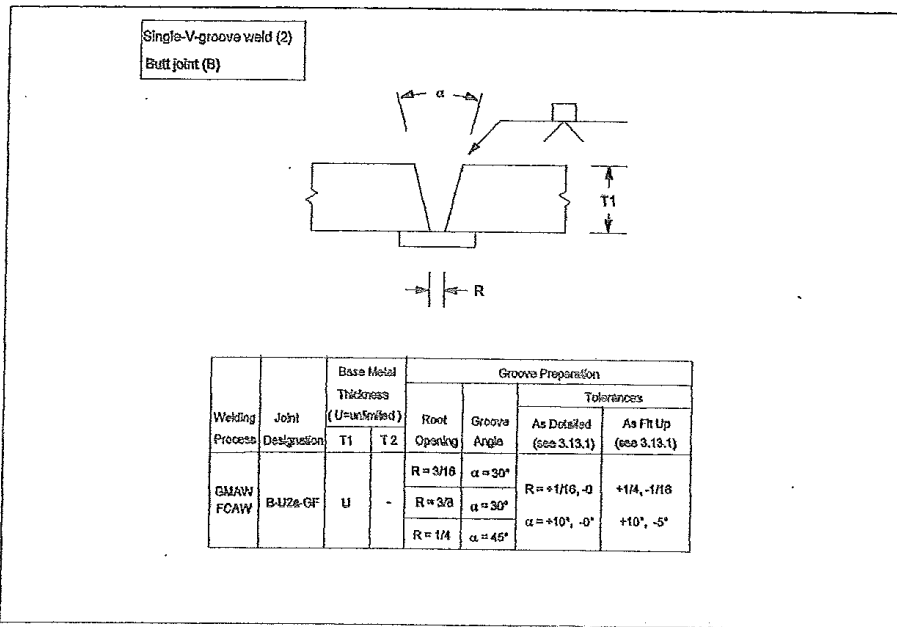

b-u2a-gf.gfl

Preheat

Less than or = to 3/4" 50 deg.  
 Over 3/4" thru 1-12" 150 deg.  
 Over 1-1/2" thru 2-1/2" 225 deg.  
 Over 2-1/2" 300 deg.

**APPENDIX H-2.2**  
**BUFFER RAILCAR BRAKE TESTING**

Appendix H-2.2.1 Static Force Brake Test Data, Form 36-A, Rev 1

KASGRO RAIL CORP									
FORM 36-A		STATIC FORCE BRAKE TEST DATA				Rev 1 10/27/2008			
Brake System:	DB-60 / EP-60				Date:	November 20, 2008			
Brake Rigging:	Elcon National 8500				Product Order:	[REDACTED]			
Slack Adjuster:	Elcon National 7100-33				Car Type:	290 Ton FM			
Handbrake:	Elcon National 33000-2				For:	[REDACTED]			
Bell Crank:	N/A				Car Series:	39470-39488			
Sheave Wheel:	8"				Test Car No:	[REDACTED]			
Brake Shoe:	2" true Guard				Date Built:	Jul-08			
Air Brake Force (Gross):	N/A	#			Light Weight:	195,600	#		
Brake Lever Ratio:	N/A	:1			Gross Rail Load:	789,000	#		
Handbrake Force (Gross):	4475 Vert.	#			Brake Force Schem.:	TMB 341-L			
EMPTY LOAD %:	40	%			Brake Arrangement:	E1114-2			
MEASURED BRAKE SHOE FORCE (IN NET POUNDS)									
Brake Cylinder Pressure (psig):									
P N E U M A T I C	WHEEL	CHANNEL	Min red 6-7 UNTAPPED	Light Car: UNTAPPED	27.25 TAPPED	Loaded Car: UNTAPPED	64.5 TAPPED	FORCE	3350 lbs. on Vert. Chas'n
	L-1	1	405	1335	1708	3656	4107	H	
	R-1	2	428	1508	1913	4175	4488	A	4328
	L-2	3	472	1524	1853	4118	4510	N	4804
	R-2	4	432	1552	1816	4241	4534	D	5308
	L-3	1	372	1382	1751	3934	4203	B	5442
	R-3	2	443	1559	1916	4537	4634	R	3250
	L-4	3	468	1456	1783	3925	4283	A	3691
	R-4	4	489	1564	1825	4336	4479	K	3738
	L-5	1	460	1350	1760	3730	4130	E	3956
	R-5	2	490	1440	1810	3820	4340		2430
	L-6	3	480	1430	1800	3910	4210		2900
	R-6	4	580	1600	1950	4130	4670		2590
L-7	1	630	1470	1660	4350	4700		3110	
R-7	2	520	1380	1570	3970	4470		3610	
L-8	3	360	1500	1730	4670	4740		3390	
R-8	4	510	1270	1440	3990	4120		3340	
L-9	1	520	1500	1680	3920	4400		2820	
R-9	2	530	1470	1710	3800	4380		3900	
L-10	3	470	1520	1770	3970	4210		3850	
R-10	4	440	1320	1683	3621	4161		3520	
L-11	1	470	1540	1790	4174	4753		3165	
R-11	2	392	1423	1756	3927	4674		5327	
L-12	3	392	1361	1690	3996	4583		5179	
R-12	4	443	1269	1672	3653	4202		4358	
TOTALS:			11196		41936		105981		91969
BCP @ Min. Red.	"A" End	(AVERAGE)	"B" End	(MAXIMUM)	(AVERAGE)	(MAXIMUM)	(MAXIMUM)		
		468.50		3863.9	4415.9	4967.9			
PISTON Loaded	B23/4"C23/4"D27/8"E23/4"F27/8"A23/4"				Brake Cylinder Pressure, Min. 30psig Reduction:		64.50		
TRAVEL: Empty	B21/4"C23/8"D25/16"E21/4"F25/16"A21/4"				Emergency Application:		75		
NET SHOE FORCE x100 =	Pneumatic Loaded %		Handbrake Loaded %		Pneumatic Light %				
LIGHT WEIGHT					41936 x 100 = 21.44		195600		
NET SHOE FORCE x100 =	105981	13.43	91889 x 100 =	11.66					
GROSS RAIL LOAD	789000		789000						
NET SHOE FORCE x100 =	105981	#VALUE!	91889 x 100 =	#VALUE!	41936 x 100 = #VALUE!				
GROSS SHOE FORCE	N/A		4475 Vert.		#VALUE!				
BRAKE PIPE CHARGE OF	90		psig		ATTESTED:		[REDACTED]		

Appendix H-2.2.2 Air Brake Test Report, Form 6-A, Rev 1

Rev.1		<b>Kasgro Rail Corp</b>	
		FORM 6-A 2/25/2016	
Air Brake Test Report (X=Tested)		CAR NUMBER <span style="background-color: black; color: black;">[REDACTED]</span>	
Single Car Test, 1Set	_____	Single Car Test, 2 Sets	_____
Single Car Test (includes B.C. Pressure Test)	_____	Single Car Test ( includes B.C. Pressure Test), 2 Sets	X
Slack Adjuster Test	X	Retainer Valve Test	X
Empty / Load Valve Test	X	Brake Pipe Leakage Test	X
System Leakage Test	X	Equalization Pressure	X
Piston Travel ( Unit Brakes)	_____	If Equipped With Load Sensor	X
Piston Travel ( Trk MTD Brakes)	X	Equalization Pressure Load Sensor	X
WABCO PAC / NYPOAC Piston Travel Adjustment	_____	Equalization Pressure Loaded	X
(Truck Mounted Brakes with Slack Adjuster	X	Equalization Pressure Empty	X
#1 #2 #3 #4	_____	Slack Adjuster Rack Measurement	_____
Lube Handbrake	X		_____
		EMERGENCY PRESSURE	X
<b>SYSTEM REPAIRS- List repairs, parts replaced, Location, and why made.</b>			
Piston Travels			
B- END: (1) 2 <sup>3</sup> / <sub>4</sub> (2) 2 <sup>7</sup> / <sub>8</sub> (3) 2 <sup>3</sup> / <sub>4</sub>		B- END: SERVICE LOADED - 64 PSI	
DB-10 - DB-20		EMERGENCY - 75 PSI	
40% LOAD SENSOR		EMPTY - 25 PSI	
A- END: (4) 2 <sup>3</sup> / <sub>4</sub> (5) 2 <sup>3</sup> / <sub>4</sub> (C) 3		A- END: SERVICE LOADED - 63 PSI	
DB-10 - DB-20		EMERGENCY - 74 PSI	
40% LOAD SENSOR		EMPTY - 24 PSI	
Signature of Tester <span style="background-color: black; color: black;">[REDACTED]</span>		Date 1-4-17	

Note: The recording of false, fictitious, or fraudulent statements on this document may be punishable as a felony under federal statutes.

## Appendix H-2.2.3 EP-60 Single Car Test Results

EP-60 Single Car Test Results: Passed [REDACTED] B 20170105 13.48

EPSCTD Version 2.20  
 EPSCTD Support Files Version 2.25  
 EPSCTD Language Files Version 1.6

Tester ID: 0164  
 Road Number: [REDACTED]  
 Car Type: Kasgro  
 12 Axle Spent Fuel Car

CCD Type: overlay

Test Date and time: 1/5/2017 1:35:04 PM to 1/5/2017 1:47:31 PM

No.	Test	Step	Expected	Actual	P/F
2.2	AAR Standard S-486	Single Car Test	Yes	Yes	P
2.5	Charging Brake Pipe	Verify User entered BCP	0.0 to 3.0 psi	0.0 psi	P
2.6	Empty/Load Valve	Set E/L Valve(s) to Loaded	Yes	Yes	-
2.8	Release Test	Verify CCD Rel BCP	0.0 to 3.0 psi	0.4 psi	P
2.9	Loaded Full Service Test	Verify Reservoir pressure	88.0 psi min	91.5 psi	-
2.11	Loaded Full Service Test	Verify CCD Loaded FS BCP	62.0 to 68.0 psi	65.6 psi	P
2.13	Loaded Full Service Test	Verify User entered BCP	62.0 to 68.0 psi	65.0 psi	P
2.17	Min Service Test	Verify CCD Min BCP	7.0 to 13.0 psi	10.4 psi	P
2.19	Min Service Test	Verify User entered BCP	7.0 to 13.0 psi	10.0 psi	P
2.22	Loaded Emergency Test	Verify Reservoir pressure	88.0 psi min	90.4 psi	-
2.24	Loaded Emergency Test	Verify CCD Loaded Emer BCP	75.0 to 81.0 psi	77.5 psi	P
2.26	Loaded Emergency Test	Verify User entered BCP	75.0 to 81.0 psi	77.0 psi	P
2.28	Release from EP Emergency	Verify CCD Rel BCP	0.0 to 3.0 psi	0.4 psi	P
2.30	Release from EP Emergency	Verify User entered BCP	0.0 to 3.0 psi	0.0 psi	P
2.31	Empty/Load Valve	Set E/L Valve(s) to Empty	Yes	Yes	-
2.34	Empty/Load Valve	Verify CCD Empty FS BCP	62.0 to 68.0 psi	63.7 psi	P
2.37	Empty/Load Valve	Verify User entered BCP	-	24.0 psi	-
2.37	Empty/Load Valve	Empty FS BCP Acceptable	Yes	Yes	P
2.40	Empty Emergency Test	Verify CCD Empty Emer BCP	75.0 to 81.0 psi	78.0 psi	P
2.42	Empty Emergency Test	Verify User entered BCP	-	30.0 psi	-
2.43	Battery Test	Verifying battery voltage	11 vdc min	12.6 vdc	P

Appendix H-2.2.4 Example of AAR Air Brake Test Witness Letter  
TTCI Letter #CC-209-221 dated January 17, 2017



Kenneth Pfahler  
Field Inspector - MID/QA Auditor  
427 North 3rd Street, Ext.  
Bellwood, PA 16617  
Cell: 814-515-3803  
Email: ken\_pfahler@ttci.aar.com

January 17, 2017

File: CC-209.221

Subject: Single Car Air Brake Test Observations Results / Kasgro Rail Corporation, New Castle, PA / Specifications S-2043 & S-486 -- H/D Flat Car ([REDACTED]) used to carry High-Level Radioactive Material

Mr. David L. Cackovic  
Chief - Technical Standards & Inspections  
Transportation Technology Center, Inc.  
P.O. Box 11130  
Pueblo, CO 81001  
E-mail: David\_Cackovic@aar.com

Dear Mr. Cackovic,

Specification testing of [REDACTED] Heavy Duty Flat Car, specifically the Single Car Air Brake Test has been completed. Testing was done at the Kasgro Rail Corporation facility in New Castle, Pennsylvania on January 17, 2017 to comply with Specification S-2043 and S-486.

I was present (test witness) for the required Single Car Air Brake Test and can conclude that applicable requirements of AAR Specification S-486 have been satisfactorily addressed. I also witnessed the Brake Pipe Restriction Test and can conclude that the AAR Specification S-471 appeared to have been satisfactorily addressed. Additionally, per an email from Mr. Belpert dated July 27, 2010 a Brake Shoe Force Measurement Test was to be performed on two (2) cars, this has been satisfactory completed on KRL 39470 and [REDACTED].

Attached information was supplied by the Kasgro Rail Corporation in support of the approval process. Should you need any additional information, please do not hesitate to call.

Sincerely,

*Kenneth Pfahler*  
Kenneth Pfahler

cc: [REDACTED], TTCI  
[REDACTED], Kasgro

**Appendix H-2.2.5 Wabtec Corporation Practice Test and Practical Exam per AAR  
Standard S-486-13**

Reference supplied upon request for pages H.2-18  
to H.2-28

**APPENDIX H-2.3**  
**BUFFER RAILCAR NDE EXAMINATIONS AND TESTING**

**Appendix H-2.3.1 TUV Rheinland Industrial Solutions, Non-Destructive Testing  
Group, Work Instruction No. PA-WI-08-005, Rev No. 1  
Ultrasonic Testing to AWS D15.1 Railroad Welding Specification**

Reference available upon request

**Appendix H-2.3.2 TUV Rheinland Industrial Solutions Procedure TRIS NDE-VT-4,  
Rev No. 0, Visual Inspection NAVSEA Technical Publications T9074-AS-GIB 010/271**

Reference available upon request

**Appendix H-2.3.3 TUV Rheinland Industrial Solutions, Non-Destructive Testing Group, Work Instruction No. WI-08-001, Rev No. 1, Liquid Penetrant Examination**

Reference available upon request

**Appendix H-2.3.4 TUV Rheinland Industrial Solutions, Non-Destructive Testing  
Group Work Instruction No. WI-08-002, Rev No. 1, Magnetic Particle Examination of  
Ferromagnetic Materials**

Reference available upon request

**APPENDIX H-2.4**  
**BUFFER RAILCAR SAFETY MONITORING SYSTEM**

Appendix H-2.4.1 System Safety Monitoring Procurement Specifications for use  
with AAR Standard S-2043 HLRW Railcars  
Procurement Specification SSM Procurement Spec RF

*SYSTEM SAFETY MONITORING PROCUREMENT SPECIFICATION  
FOR USE WITH AAR STANDARD S-2043 HLRW RAILCARS*

***Rick Ford***

*Kasgro Rail Corp., Inc.  
121 Rundle Road  
New Castle, PA 16102  
Tel: 724-658-9061*

System Safety Monitoring Procurement Specification for AAR S-2043 HLRW Trains

**1.0 Scope of Work**

**1.1 S-2043 System Safety Monitoring (SSM) Equipment for use with railcars to be used for transport of High Level Radioactive Materials (HLRM) by rail. The system supplied must be 100% compatible with current SSM equipment currently being utilized on DODX railcars for transport of HLRM. Supply of SSM equipment for use with one (1) 12-axle cask flat car and two (2) 4-axle buffer flat cars to meet the requirements of American Association of American Railroads (AAR) Standards S-2043 and S-2045, unless otherwise specified, herein.**

**“Note: SSM communication utilizing CDMA 1XRTT technology is not acceptable as it planned for sunseting at the end of December 2019.”**

**2.0 Applicable Documents and Drawings**

- 2.1 The documents identified herein a part of this specification and revision dates shall be the date of Request for Proposals.
- 2.2 Commercial documents listed herein (i.e. AAR, ASTM, AWS), the latest revision is acceptable.
- 2.3 Should a conflict occur between this procurement specification and the references listed herein, the text of this procurement specification shall take precedence. Any conflicts shall be identified to the Buyer for information.
- 2.4 Association of American Railroads (AAR) Specifications, Standards and Recommended Practices.
- 2.2 S-2043 Performance Standard for Trains Used to Carry High-Level Radioactive Material, Effective 2003, Revised 2009, or latest version.
- 2.4 S-2045 Standard Operating Procedure for Installation of Remote Monitoring Equipment.
- 2.5 S-5700 Railroad Electronics Standards Configuration Management.
- 2.6 S-5702 Railroad Electronics Environmental Requirements
- 2.7 American Welding Society (AWS)
  - 2.7.1 D1.1 Structural Welding Code – Steel
  - 2.7.2 D15.1 Railroad Welding Specification, Cars and Locomotives
- 2.8 Railcar General Arrangement Drawings for cask and buffer cars.

**3.0 Quality Assurance Provisions**

- 3.1 Unless otherwise approved by the Buyer, the Seller shall maintain a quality management and inspection system with a nationally recognized quality standard during the term of the contract. The Seller’s quality manual shall be available for Buyer review, upon request.

System Safety Monitoring Procurement Specification for AAR S-2043 HLRW Trains

**4.0 Buyer Supplied Equipment**

- 4.1** The Buyer will provide one (1) 12-axle cask Flat car and two (2) 4-axle buffer cars. Buyer shall perform testing as required by Sections 6.2 and 6.3 to AAR standard S-2043 (reference paragraph 5.21 below).

**5.0 Requirements**

**5.1** The Seller shall design and provide all of the software, materials, equipment, resources, and documentation necessary to satisfy the requirements in AAR Standard S-2043 for system safety monitoring. The monitoring system shall satisfy all of the requirements for real-time and remote monitoring including, data collection, data storage, data download, data transmission, operating displays, train stop alarms, warning signals, internal self-test circuitry, report generation, etc. Sensors may be wireless, hardwired, or a combination of both at the option of the Seller. All requirements in S-2043 shall apply (reference Sections 4.5, 4.7.8, 6.2, Appendix A Section 4.6, and Appendix B Sections 5.4 and 5.5) with the following exceptions

- (1) The system is not required to monitor the braking performance parameters monitored by the Electronically Controlled Pneumatic (ECP) brake system.
- (2) The monitoring system is not required to function over the ECP braking system, but the design shall not preclude the ability to develop and incorporate communication via the ECP braking system in the future as required by Paragraph 4.4.1 of S-2043.

**5.2** In lieu of real-time ECP brake system communication per Paragraph 4.5.4.2.1 of S-2043, the monitoring equipment shall communicate real-time with the locomotive, buffer cask, and escort vehicles via other direct connection such as radio frequency. Remote communication per Paragraph 4.5.4.2.2 of S-2043 may be via cellular, satellite, or combinations thereof. The system shall:

- (1) Monitor and record all required parameters simultaneously at a sampling rate acceptable to the AAR/EEC (i.e., a polling refresh rate no slower than once per second and a maximum notification dwell time of 10 seconds).
- (2) Save all data/variances at times when communication coverage (cellular or satellite), is temporarily unavailable, and transmit the data when coverage is re-established.
- (3) Save all data collected in the event of a power failure or railcar derailment. The system shall exhibit the same robust capabilities of modern locomotive event recorders (reference: 49 CFR, Part 229 Appendix D).
- (4) Provide secure encrypted data transmission that is Federal Information Processing Standard (FIPS) PUB 140-2 compliant or greater. The Security Level applied per FIPS PUB 140-2 shall be at the option of the Seller.
- (5) Provide secure password protected access to the data, both real-time and remotely.

System Safety Monitoring Procurement Specification for AAR S-2043 HLRW Trains

- (6) Immediately provide remote notification of alarms via cell phone or E-mail to pre-established personnel designated by the Buyer.
  - (7) Conform to technology that utilizes the equivalent of Long-term Evolution (LTE, 4G or latest technology).
- 5.3 The monitoring system shall be designed for use on the cask and buffer flat cars as shown on Kasgro drawings XXXXX, in both the loaded and empty conditions. The loaded conditions are shown on drawing XXXXX. The number of railcars to be equipped with the monitoring system shall be defined in the purchase order.
- 5.4 The monitoring system shall be capable of operating with multiple SSM equipped flatcars in a train, and shall differentiate the data being collected, recorded, and reported for each specific railcar.
- 5.5 The railcar monitoring equipment and system shall be designed for operation and storage under the range of environmental conditions and requirements specified in Section 3.0 of AAR Standard S-5702; for the appropriate class/category of the equipment as delineated in Table 3.1 of S-5702 except at follows:
- 5.6 The railcar monitoring equipment and system shall satisfy the requirements in Section 4.0 of S- 5702 relating to electromagnetic interference and compatibility as clarified below:
- (1) The Radiated Limits per Paragraph 4.2.1 of S-5702 shall apply only to equipment that utilizes train line or other railcar supplied power, or resides in the locomotive. In addition, supplied equipment shall not operate on any frequency used by railroad communications (150, 220, 450 and 900 MHz) and any cellular frequencies.
  - (2) The requirements for Conducted Emissions, Conducted Susceptibility, and ESD Susceptibility per Paragraphs 4.2.2.1, 4.2.2.2 and 4.2.3 of S-5702, respectively, shall only apply to equipment that utilizes train line or other railcar supplied power, or resides in the locomotive.
- The Seller shall provide evidence in writing that the equipment has met the applicable electromagnetic interference (EMI) acceptance tests required by S-5702.
- 5.7 The Safety System Monitoring Equipment shall:
- (1) Be capable of substantial down-time (3 to 4 years) in outside storage between uses without degradation to the instrumentation or power supply.
  - (2) Be designed to allow for easily integrating future sensor types/models with minimal or no redesign.

System Safety Monitoring Procurement Specification for AAR S-2043 HLRW Trains

- 5.8 If required by the AAR, the railcar monitoring equipment and system shall:**
- (1) Comply with the Vendors configuration management guidelines of AAR Standard S-5700.
  - (2) Comply with the standards established by the Railway Electronics Task Force (RETF). The Seller's configuration management processes shall be compatible with the configuration management plan used by the RETF so that the Seller's products clearly indicate the version of the standard(s) with which they are compliant.
- 5.9 The Seller shall provide a complete parts list and an assembly drawing to show the arrangement of the monitoring system as it will be installed on the 12-axle cask and 4-axle buffer flatcars (i.e., sensor locations, mounting and wiring arrangements, location of power supplies and data processing equipment, etc.). Enlarged views or supplemental drawings shall be provided, as necessary, to show the details for sensor and equipment mounting. The drawings and subsequent revisions shall be subject to Buyer approval.**
- 5.10 The Seller shall provide an assembly, operating, maintenance, and troubleshooting manual for the monitoring system specific to both the cask and buffer flat car application. The manual shall be subject to Buyer approval and shall include:**
- (1) A complete description of the monitoring system, including a detailed description of the method of sampling/collecting, storing, and reporting information for both the real-time and remote systems.
  - (2) A system schematic and high level block diagram.
  - (3) A copy of the assembly drawing(s) and parts list.
  - (4) A copy of the manufacturer's specification sheets for each sensor and component.
  - (5) Assembly and equipment checkout instructions.
  - (6) Operating instructions including methods to confirm proper system/equipment calibration, sensor response, and communication.
  - (7) Maintenance instructions including a list of required spare parts.
  - (8) A fault tree analysis per Section 4.5.5 of S-2043.
  - (9) Any custom software developed by the Seller.
- 5.11 The Seller shall obtain or confirm AAR/EEC acceptance of the System Safety Monitoring design in accordance with Section 4.7.8 of S-2043 and Section 3 of S-2045, prior to installation of the lead monitoring system on a cask and buffer flatcar test vehicles. The design package shall be provided for Buyer review and information at least 30-days prior to submittal to the AAR/EEC. AAR acceptance of the monitoring system (in writing) shall be provided to the Buyer as evidence of compliance with this requirement.**

System Safety Monitoring Procurement Specification for AAR S-2043 HLRW Trains

- 5.12** The real-time limits/situations requiring a train stop signal shall be as specified in Paragraph 4.5.4.2.1 of S-2043. The real-time limits requiring a warning for train inspection at the next scheduled stop shall be as specified in paragraph 4.5.4.2.2 of S-2043. In addition, the real-time and remote systems shall specifically identify and notify of any detected variances to: (1) the overheated roller bearing criteria specified in Rule 36 of the Field Manual of the AAR Interchange Rules (IR), and (2) the wheel out of round (flats) impact criterion specified in Rule 41 of the AAR IR and AAR Report No. R-829 (Wheel Impact Load Detector Tests and Development of Wheel Flat Specification).
- 5.13** Unless otherwise accepted by the Buyer, instrumentation for measuring lateral acceleration and hunting shall be mounted near the lateral centerline of one of the car-body bolsters and on each span bolster in line with the lateral centerline of Truck-A and Truck-B. Alternate sensor mounting locations as recommended by the Seller are acceptable subject to Buyer approval.
- 5.14** The power supply for the monitoring system shall be capable of continuous operation and monitoring of all required parameters for a period of no less than 1 year without the need to replace any portion of the power supply (e.g., batteries).
- All sensors with an independent power supply (i.e. sensors that do not rely on the source that powers the central processing unit) shall be equipped with a feature that minimizes (e.g. nanoamps) or precludes the draw of power until activated for use.
- 5.15** The system shall include self-test circuitry to internally check power levels and to assess the performance status of the equipment/sensors installed to monitor all of the parameters required by paragraph 4.5.4.1 of S-2043, except as excluded in paragraph 5.1 above.
- 5.16** The system shall be capable of preparing reports showing the measured conditions and system response while monitoring all of the parameters listed in Section 4.5.4 of S-2043, except as excluded in paragraph 5.1 above. The data shall be collected and recorded in such a manner to identify specific railcar location and train speed for all other parameters monitored. Report generation shall be available in both tabular and graphical formats (e.g., .xls, .csv) to facilitate trend analyses.
- 5.17** The monitoring system shall be designed to provide the flexibility to:
- (1) Only transmit and archive the exception data, including the raw data for 60 minutes prior to the exception.
  - (2) Delete the remotely stored data at the end of each trip.

System Safety Monitoring Procurement Specification for AAR S-2043 HLRW Trains

- (3) Limit or exclude either the real-time or remote data transmissions at the operating option of the Buyer.
- (4) Exclude the locomotive warning or stop-train display lights at the operating option of the Buyer for each individual trip (i.e. portable).
- (5) Relocate the readout display panel between escort vehicles and trains (i.e., portable).
- (6) Remotely delete the data stored on the system's removable media (i.e., without physical work on the railcar-mounted equipment.)

All sensors of the same type shall be interchangeable with one another. The Seller shall ensure any programming required to activate or incorporate replacement sensors into the monitoring system can be performed remotely.

Portable display units shall include an audio alarm that sounds when a warning/exception occurs. The alarm shall have the ability to be turned off once the warning/exception has been acknowledged. The Seller shall provide protective carrying cases (e.g., hard plastic outer shell with internal padding) for the portable display units to facilitate handling and to minimize the potential for handling damage. One case shall be provided per display or per set of displays.

- 5.18 All welds used for assembly of the monitoring equipment to the cask and buffer flatcars shall be made and subjected to a 1X visual inspection in accordance with AWS D1 .1 or AWS D15.1.
- 5.19 Equipment and sensors located on the car body or end platforms shall be protected from potential inadvertent damage due to personnel walking or working on the railcar.
- 5.20 Unless otherwise approved by the Buyer, central onboard power/monitoring units shall be stenciled or decaled per S-2045 to identify the unit function and the applicable contact phone number for information related to the device. The stencil/decal shall be highly visible and shall be a minimum of 2" x 3" in size. Stencil/decal color shall be as agreed between the Buyer and Seller, but shall not be bright yellow.
- 5.21 Prior to full system production, the Seller shall provide and install lead monitoring systems on cask and buffer test vehicles. The test cars and the monitoring systems shall be tested and operated by the Buyer in accordance with Sections 6.2 (System Monitoring Tests) and 6.3 (Revenue Service Tests) of AAR Standard S-2043. Seller personnel shall be on location at the test facility (Transportation Technology Center) to provide technical support during the testing performed per Section 6.2 of S-2043, and shall be responsible to resolve any system design/hardware issues. Lessons learned or necessary equipment improvements determined from lead unit testing shall be implemented on all subsequent production units.

System Safety Monitoring Procurement Specification for AAR S-2043 HLRW Trains

- 5.22** When required by the purchase order, the Seller's personnel shall install the monitoring systems on the production cask and buffer flat cars, and confirm that each system is fully functional and is operating in compliance with the technical requirements specified herein and by the applicable AAR standards and specifications. Seller installations shall be field service operations at the locations of the flatcars at the time of system installation. If third party installation is performed, Seller shall package, pack, and ship all equipment to the required destinations. Packaging and packing shall be per good commercial practice and shall ensure the equipment arrives at destination without damage during handling or shipment.
- 5.23** Over the course of the development, testing, and production of the monitoring system various meetings/conferences shall be conducted between the Buyer and Seller including:
- (1) A kickoff meeting (within 1 month after order placement) to review the overall development plan and schedule.
  - (2) Periodic meetings (approximately every 6 weeks) at the Sellers facility to review overall status and emergent issues.
  - (3) Weekly status calls.
  - (4) A meeting at the Sellers facility to review the design package prepared for submittal to the AAR/EEC per paragraph 5.11 above.
- 5.24** The Seller shall install tamper-indicating security seals around the outermost enclosures that contain the removable data storage media. The Seller shall provide all tools and materials necessary for seal installation, and one set of seal equipment (wire spool, package of security seals, seal press) shall be provided for each railcar to be equipped with monitoring equipment, with the total quantity identified by the purchase order.

It is recommended that the same type of security seals currently used on DODX railcar SSM equipment be used to maintain consistency.

## Appendix H-2.4.2 Lat-Lon AAR Approved S-2043 System Procurement Specification SSM Procurement Spec RF



Lat-Lon, LLC  
2300 S. Jason St.  
Denver, CO 80223  
303-937-7406


### LAT-LON AAR APPROVED S-2043 SYSTEM

[REDACTED] awarded Lat-Lon, LLC a contract [REDACTED] with a monitoring system to meet AAR S-2043 requirements with the following exceptions:

- (1) The system is not required to monitor the braking performance parameters monitored by the Electronically Controlled Pneumatic (ECP) brake system.
- (2) The monitoring system is not required to function over the ECP braking system.

This is consistent with the implementation plan for multiple-car testing of the 290 ton flatcar, as submitted [REDACTED] and accepted by the AAR/EEC.

### *Railcar Drawing*



## SYSTEM DESCRIPTION


### Design Overview

Two monitoring systems are installed on each car. One system is positioned at the A end platform and is responsible for the A end readings and the other system is mounted on the B end platform and responsible for the B end readings. This creates redundant car body measurements on each car while making the system more failsafe and cost effective.

### Orientation

The general layout for the 12 axle flat car monitoring system is shown on the diagram below.

Flat Car Diagram - Top View

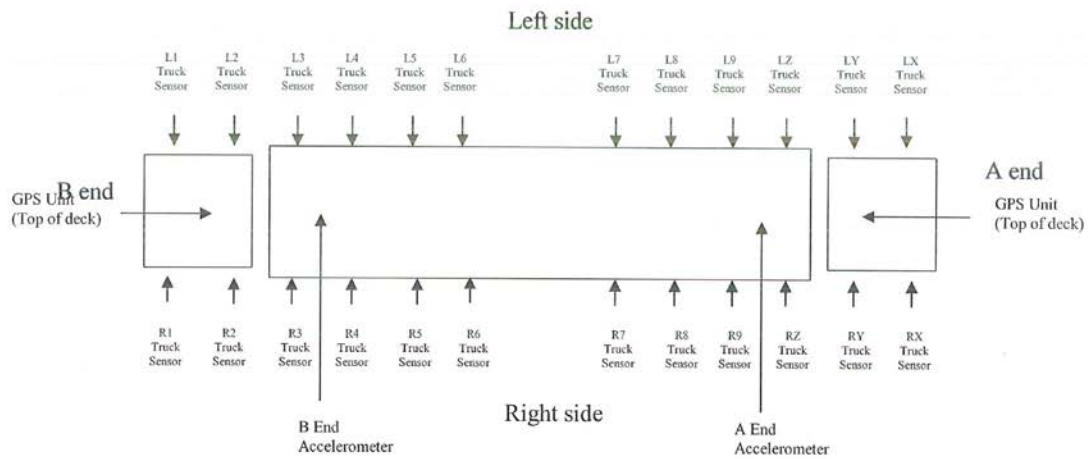

**System Components**

The monitoring system is broken down into nine component groups. Each component group has a number of sub assemblies. The system is maintained on a component basis. These components are designated as follows:

- Mounting Pedestal
- A End
- B End




- Pedestal Cover (qty 2 per pedestal)
- A End
- B End



GPS Base Unit  
A End GPS Base Unit  
B End GPS Base Unit



Memory Module  
A End  
B End

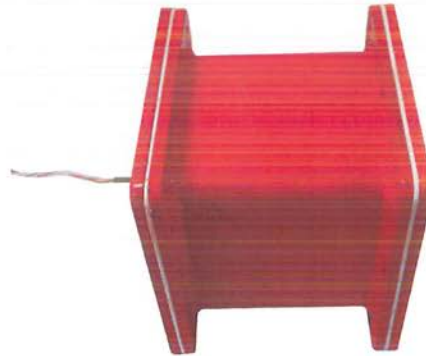


Battery Module  
A End  
B End



Solar/Antenna Cap  
A End  
Cellular Antenna  
VHF Antenna  
Wireless Sensor Antenna  
Solar Panels  
B End  
Cellular Antenna  
VHF Antenna  
Wireless Sensor Antenna  
Solar Panels



Wired Sensor & Wire Harness  
A End  
B End

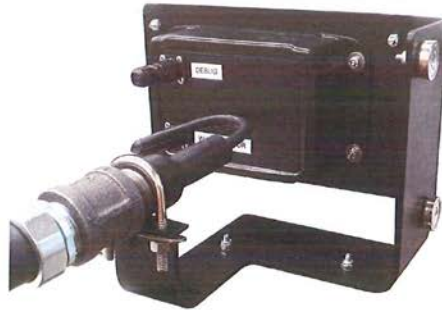


Wireless Truck Mounted Sensors – Each of these sensors are identical but its position is designated into the unit’s database.


- R1 Sensor
- R2 Sensor
- R3 Sensor
- R4 Sensor
- R5 Sensor
- R6 Sensor
- L1 Sensor
- L2 Sensor
- L3 Sensor
- L4 Sensor
- L5 Sensor
- L6 Sensor
  
- R7 Sensor
- R8 Sensor
- R9 Sensor
- RZ Sensor
- RY Sensor
- RX Sensor
- L7 Sensor
- L8 Sensor
- L9 Sensor
- LZ Sensor
- LY Sensor
- LX Sensor

Associated with B end

Associated with A end

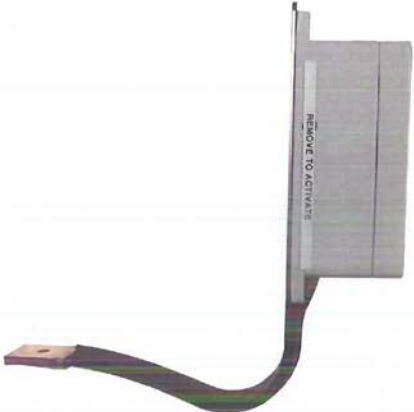


Portable Display Units (set)  
Two units provided per set

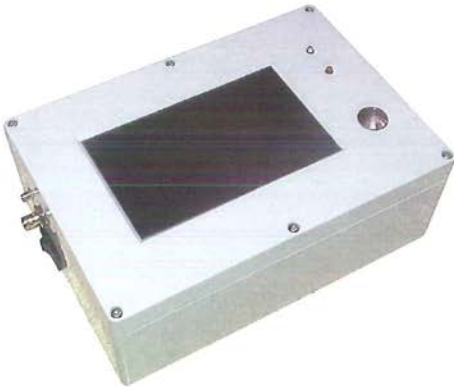

**APPENDIX H-3**  
**BUFFER RAILCAR BILL OF MATERIAL**

DATE:		Jun-17		<b>RAIL KASGRO CORP</b>  121 RUNDLE RD. NEW CASTLE, PA				
LISTED BY:		JO						
CHECKED BY:		NH						
Issue Date:				Jan-2018		<b>CUSTOMER:</b>		
						<b>TYPE OF CAR: 4 AXLE FLAT</b>		
						<b>ATLAS BUFFER CAR</b>		
ITEM NO.	DWG. NO. OR MFG. PART NO.	REL'D		DESCRIPTION	QUAN.		P.O. NO.	Vendor
		PUR	FAB		CAR	TOT		
1-1	AS-541-1			SWING MOTION TRUCK ASSEMBLY	2			Amsted Rail
1-2	N53272-1			KONI DAMPER ASSEMBLY	4			Amsted Rail
1-3	11865			E15GB CUSHIONING UNIT	2			Amsted Rail
1-4	F-15 J			YOKE ASSEMBLY	2			Amsted Rail
1-5	DB60II			PNEUMATIC AIR BRAKE	1			New York Air Brake
1-6	D-1160-32			TRUCK SPRING ASSEMBLY	2			Wabtec
1-7	V-674			BRAKE SHOE	8			Airek
1-8	TTEF-15W			UNCOUPLING LEVER ASSEMBLY	2			Rollform Group
1-9	AAR Y-47			COUPLER PIN	2			McConway & Torley
1-10	EF-511			COUPLER TYPE E-43 F Shank	2			McConway & Torley
1-11	4067			16" DIA LOW PROFILE CENTER PLATE	2			Amsted Rail
1-12	BB624-RH			#24 BRAKE BEAM-RH	2			Miner Ent
1-13	BB624-LH			#24 BRAKE BEAM-LH	2			Miner Ent
1-14	TCC-III-60LT			TRUCK SIDE BEARING	4			Miner Ent
1-15	61936			WHEEL SET ASSEMBLIES	4			Progress Rail
1-21	F4638			DROP IN TRUCK WEAR LINER	2			Astralloy
1-22	1025			RETAINING KEY	8			PA Railcar
1-24	343-L			TRUCK MOUNTED BRAKE SYSTEM	2			Amsted Rail
1-27	7900			HAND BRAKE	1			Amsted
1-28	S4D-6511-09			GRAB IRON	1			ARI
1-29	S4D-6513-03			GRAB IRON	7			ARI
1-31	791-8			SIDE BEARING WEDGE	4			Stucki
1-32	8030			1 3/32 X 3 1/2" BRAKE PIN	4			General Bearing
1-33	3700011			5/16 X 2 1/2 LOCKTITE COTTER	4			General Bearing
1-34	1026			JAW FOR 3/4" ROD	3			Wabtec
1-35	SCHAEFER			EYE FOR 3/4 ROD	1			Wabtec
1-36	7264			1/2" HAMMERLOCK FITTING	1			Amsted Rail
1-37	1749			SHEAVE WHEEL	1			Amsted Rail
1-38	D-1003-20			BRAKE BADGE PLATE	1			Specialty Metals
1-39	8015			1 3/32 X 6" BRAKE PIN	1			General Bearing
1-40	458			CLEVIS	1			Amsted Rail
1-41	240			RIVET	1			Amsted Rail
1-42	565256			3/4 SOCKET WELD FTG	15			Wabtec
1-43	93841			3/4 GASKET	15			Wabtec
1-44	565252			3/8 SOCKET WELD FTG	2			Wabtec
1-45	93839			3/8 GASKET	2			Wabtec
1-46	565262			1 1/4 SOCKET WELD FTG	6			Wabtec
1-47	94790			1 1/4 GASKET	6			Wabtec
1-48	565259			1" SOCKET WELD FTG	2			Wabtec
1-49	93986			1" GASKET	2			Wabtec
1-50	580042			3/4 SOCK FTG NO GASKET	5			Wabtec
1-61	EHS			HOSE SUPPORT	2			Strat0
1-63	AAR-300			1 1/4 COUPLING	4			Wabtec
1-64	93839			3/8 GASKET	2			Wabtec
1-65	90034-281			ANGLE COCK U-BOLT	2			Wabtec
1-66	98903			3/4 X 3/4 X 3/4 TEE BODY	1			Wabtec
1-67	578219			HOSE ASSEMBLY	2			Wabtec
2-1				7/8 - 9 NC X 3 1/2" HEX BLT	28			AAR Vendor List
2-2				7/8 - 9 NYL INS L'NUT	28			AAR Vendor List
2-3				5/8 - 11 NC NYL INS L'NUT	50			AAR Vendor List
2-4				5/8-11 NC X 2" HEX BOLT	16			AAR Vendor List
2-5				5/8-11 NC X 2 1/4" HEX BOLT	8			AAR Vendor List

DATE:		Jun-17		<div style="text-align: center;">  <p><b>RAIL KASGRO CORP</b></p> <p>121 RUNDLE RD. NEW CASTLE, PA</p> </div>							
LISTED BY:		JO									
CHECKED BY:		NH									
Issue Date:				Jun-17		<b>CUSTOMER:</b>		<b>TYPE OF CAR: 4 AXLE FLAT</b>		<b>ATLAS BUFFER CAR</b>	
ITEM NO.	DWG. NO. OR MFG. PART NO.	REL'D PUR FAB		DESCRIPTION	QUAN. CAR	TOT	P.O. NO.	Vendor			
2-6				3/4-10 NC X 3" PLOW BOLT	8			AAR Vendor List			
2-7				3/4 - 10 NC NYL INS				AAR Vendor List			
2-8				3/4 - 10 NC X 2" HEX BOLT	4			AAR Vendor List			
2-9				5/8 -11 NC X 2 1/2" HEX BOLT	14			AAR Vendor List			
2-10				1/2-13 NC NYL INS L'UNIT	18			AAR Vendor List			
2-11				1/2-13 NC X 2 1/4 HX BOLT	16			AAR Vendor List			
2-12				3/8-16 NC NYL INS L'NUT	16			AAR Vendor List			
2-13				3/8-16 NC X 1 1/2" HX BOLT	8			AAR Vendor List			
2-14				5/8-11 NC X 12 1/2" HX BOLT	4			AAR Vendor List			
2-15				1-8 NC X 7" HX BOLT	3			AAR Vendor List			
2-16				1-8 NC NYL INS L'NUT	3			AAR Vendor List			
2-17	562054			1/2-13 NC X 1" SLCS	10			WABTEC			
2-18				1/2-13 NC X 4" HX BOLT	2			AAR Vendor List			
2-19	562005			1/2-13 NC X 1 1/2" SLCS	2			WABTEC			
2-20				5/8-11 NC X 3" HX BOLT	1			AAR Vendor List			
2-21				5/8-11 NC X 4 1/2 HX BOLT	2			AAR Vendor List			
2-22				5/16 X 2 1/2" COTTER	1			AAR Vendor List			
2-23				1/2-13 NC X 1 7/8 TEE HD BOLT	2			AAR Vendor List			
2-24	562052			3/8-16 NC X 1" SLCS	2			WABTEC			
2-25				3/8-16 NC X 1 1/4 HEX BOLT	8			AAR Vendor List			
2-26				1 3/4-5 NC X 11" HEX BOLT	2			AAR Vendor List			
2-27				1 3/4-5 NC HEX NUT	2			AAR Vendor List			
	S-2043 SYSTEM			SYSTEM SAFETY MONITORING	2			LAT-LON, LLC			

**APPENDIX H-4**  
**BUFFER RAILCAR FABRICATION INSPECTION PLAN**  
**SUPPORTING DOCUMENTS**

Appendix H-4.1 Kasgro Rail Receiving Inspection Report  
Form 9Z-1

KASGRO RAIL CORP  
FORM 9Z-1  
RECEIVING INSPECTION REPORT

Date 7/21/10

P.O.# \_\_\_\_\_ CAR/JOB # \_\_\_\_\_

MATERIAL DESCRIPTION \_\_\_\_\_

DRAWING # \_\_\_\_\_ PART # \_\_\_\_\_

(IF FABRICATED PART) DRAWING # \_\_\_\_\_

MILL REPORTS RECEIVED YES \_\_\_ NO \_\_\_ N/A \_\_\_ REPORTS CORRECT YES \_\_\_ NO \_\_\_ N/A \_\_\_

ACCEPTANCE PER SAMPLE SIZE WHEN SAMPLING LOTS OF MATERIAL

LOT SIZE	SAMPLE SIZE	REJECTION CRITERIA
1-10	1	1
11-20	2	1
21-50	3	1
51-100	4	1
101-200	5	1
201-500	6	1
501-UP	7 PER 500 LOT	1 PER 500 LOT

DATE RECEIVED	QUANTITY	QUANTITY REMAINING	REMARKS

To the best of my knowledge all information contained in this document is accurate.

Signed: \_\_\_\_\_ Kasgro Rail

## Appendix H-4.2 Railcar Dimensional Inspection and Sampling Plan Forms 9B and 9C

PURCHASE ORDER:

RAILCAR DIMENSIONAL INSPECTION AND SAMPLING PLAN

1

DRAWING NO.		REV LEVEL	
-------------	--	-----------	--

FORM 9B 3/17/10

ITEM NO.	NO. PER CAR	SAMPLING PLAN		
3-14	8	1 OF	8	LIMITED DIMENSIONS ( SEE DATA SHEET)
3-15	8	1 OF	8	LIMITED DIMENSIONS ( SEE DATA SHEET)
3-16	8	1 OF	8	LIMITED DIMENSIONS ( SEE DATA SHEET)

INSPECTION ACCEPTANCE PER SAMPLE SIZE

LOT SIZE	SAMPLE SIZE	REJECTION CRITERIA
1-10	1	1
11-20	2	1
21-50	3	1
51-100	4	1
101-200	5	1
501-UP	6	1

To the best of my knowledge all information contained in this document is accurate.

Signed: \_\_\_\_\_ Kasgro Rail

The recording of false, fictitious or fraudulent statements or entries on this document may be punishable as a felony under federal law statutes.

PURCHASE ORDER:

RAILCAR DIMENSIONAL INSPECTION AND SAMPLING PLAN

2

DRAWING NO.	0	REV LEVEL	0
Item no.	3-14	Qty	8

FORM 9C 3/17/10

Inspected By: \_\_\_\_\_ Date: \_\_\_\_\_

Dimension/ Tolerance	Frequency of Inspection	Method of Inspection	Tool No.	Record Actual Dimension	Results
					Piece 1
22'-8"	1 OF 8	A	NA	OK/UNSAT	
3' 6"	1 OF 8	A	NA	OK/UNSAT	
2" Thickness	1 OF 8	A	NA	OK/UNSAT	

Inspection Method Legend  
 A-TAPE MEASURE  
 B-VARIABLE GAGE  
 C-FIXED GAGE

Inspection Symbol  
 Check Mark = OK  
 x = UNSAT  
 Yes = Record Actual Dimension  
 NA = No Inspection Required

The recording of false, fictitious or fraudulent statements or entries on this document may be punishable as a felony under federal law statutes.

PURCHASE ORDER:

RAILCAR DIMENSIONAL INSPECTION AND SAMPLING PLAN

3

DRAWING NO.	0	REV LEVEL	0
Item no.	3-15	Qty	8

FORM 9C 3/17/10

Inspected By: \_\_\_\_\_ Date: \_\_\_\_\_

Dimension/ Tolerance	Frequency of Inspection	Method of Inspection	Tool No.	Record Actual Dimension	Results
					Piece 1
22'-11 3/16"	1 OF 8	A	NA	OK/UNSAT	
3' 1"	1 OF 8	A	NA	OK/UNSAT	
2" Thickness	1 OF 8	A	NA	OK/UNSAT	

Inspection Method Legend  
 A-TAPE MEASURE  
 B-VARIABLE GAGE  
 C-FIXED GAGE

---

Inspection Symbol  
 Check Mark = OK  
 x = UNSAT  
 Yes = Record Actual Dimension  
 NA = No Inspection Required

The recording of false, fictitious or fraudulent statements or entries on this document may be punishable as a felony under federal law statutes.

PURCHASE ORDER:

RAILCAR DIMENSIONAL INSPECTION AND SAMPLING PLAN

4

DRAWING NO.	0	REV LEVEL	0
Item no.	3-16	Qty	8

FORM 9C 3/17/10

Inspected By: \_\_\_\_\_ Date: \_\_\_\_\_

Dimension/ Tolerance	Frequency of Inspection	Method of Inspection	Tool No.	Record Actual Dimension	Results Piece 1
22'-11 3/16"	1 OF 8	A	NA	OK/UNSAT	
4"	1 OF 8	A	NA	OK/UNSAT	
2" Thickness	1 OF 8	A	NA	OK/UNSAT	

Inspection Method Legend  
 A-TAPE MEASURE  
 B-VARIABLE GAGE  
 C-FIXED GAGE

Inspection Symbol  
 Check Mark = OK  
 x = UNSAT  
 Yes = Record Actual Dimension  
 NA = No Inspection Required

The recording of false, fictitious or fraudulent statements or entries on this document may be punishable as a felony under federal law statutes.



Appendix H-4.4 Car Body – Heat Identification Form  
 Form 44B, Rev 3/12/2010

CAR BODY - HEAT IDENTIFICATION  
 FORM 44B - 3/12/2010

DATE :		BODY NUMBER:				
TO THE BEST OF MY KNOWLEDGE ALL INFORMATION CONTAINED IS ACCURATE						
SIGNED:		KASGRO RAIL				
<small>* Use of ASTM 572 grade 50 material is acceptable for grade 60 mat'l provided the mechanical properties for grade 60 material are satisfied</small>						
<small>Charpy impact testing, when required, will be in accordance with ASTM A673. The minimum average absorbed energy shall be 20 ft-lbs at zero degrees F. Transverse impact test is required for plate widths over 24 inches</small>						
PART NO.	PRINT NO.	HEAT NUMBER	MELTER	QTY/CAR	MATERIAL	special testing
3-11	D-1114-09			2	A-36	hardness
3-11	D-1114-09			2	A-36	hardness
3-15	D-1114-10			1	A-572 GR50	
3-16	D-1114-10			4	A-572 GR60*	charpy
3-16	D-1114-10			4	A-572 GR60*	charpy
3-16	D-1114-10			4	A-572 GR60*	charpy
3-16	D-1114-10			4	A-572 GR60*	charpy
3-17	D-1114-10			2	A-572 GR50	
3-17	D-1114-10			2	A-572 GR50	
3-18	D-1114-10			2	A-572 GR50	
3-18	D-1114-10			2	A-572 GR50	
3-26	D-1114-12			2	A-572 GR60*	charpy
3-26	D-1114-12			2	A-572 GR60*	charpy
3-27	D-1114-13			2	A-572 GR50	
3-27	D-1114-13			2	A-572 GR50	
3-28	D-1114-13			2	A-572 GR50	
3-28	D-1114-13			2	A-572 GR50	
3-31	D-1114-14			2	A-572 GR50	
3-31	D-1114-14			2	A-572 GR50	
3-32	D-1114-14			2	A-572 GR50	
3-32	D-1114-14			2	A-572 GR50	
3-34	D-1114-15			2	A-572 GR60*	charpy
3-34	D-1114-15			2	A-572 GR60*	charpy
3-35	D-1114-16			1	A-572 GR60*	charpy
3-36	D-1114-16			1	A-572 GR50	
3-37	D-1114-16			2	A-572 GR50	
3-37	D-1114-16			2	A-572 GR50	
3-139	D-1114-39			2	A-572 GR42	
3-139	D-1114-39			2	A-572 GR42	
Bolster Assembly Applied		A end _____		B end _____		
Welding Wire		Hobart: _____				

Note: The recording of false, factitious or fraudulent statements or entries on this document may be punishable as a felony under federal statutes. 1

**CAR BODY - HEAT IDENTIFICATION  
 FORM 44B - 3/12/2010**

<b>DATE :</b> _____	<b>BODY NUMBER:</b> _____
TO THE BEST OF MY KNOWLEDGE ALL INFORMATION CONTAINED IS ACCURATE	
<b>SIGNED:</b> _____ <b>KASGRO RAIL</b>	

\* Use of ASTM 572 grade 50 material is acceptable for grade 60 mat'l provided the mechanical properties for grade 60 material are satisfied

Charpy impact testing, when required, will be in accordance with ASTM A673. The minimum average absorbed energy shall be 20 ft-lbs

at zero degrees F. Transverse impact test is required for plate widths over 24 inches

PART NO.	PRINT NO.	Control Number	Melter	QTY/CAR	MATERIAL	special testing
3-120	D-1114-8			4	A-514 GR B	
3-120	D-1114-8			4	A-514 GR B	
3-120	D-1114-8			4	A-514 GR B	
3-120	D-1114-8			4	A-514 GR B	
3-19	D-1114-11			2	A-572 GR50	
3-19	D-1114-11			2	A-572 GR50	
3-20	D-1114-11			2	A-572 GR50	
3-20	D-1114-11			2	A-572 GR50	
3-22	D-1114-11			2	A-572 GR50	
3-22	D-1114-11			2	A-572 GR50	
3-24	D-1114-11			4	A-572 GR50	
3-24	D-1114-11			4	A-572 GR50	
3-24	D-1114-11			4	A-572 GR50	
3-24	D-1114-11			4	A-572 GR50	
3-33	D-1114-11			14	A-572 GR50	
3-33	D-1114-11			14	A-572 GR50	
3-33	D-1114-11			14	A-572 GR50	
3-33	D-1114-11			14	A-572 GR50	
3-33	D-1114-11			14	A-572 GR50	
3-33	D-1114-11			14	A-572 GR50	
3-33	D-1114-11			14	A-572 GR50	
3-33	D-1114-11			14	A-572 GR50	
3-33	D-1114-11			14	A-572 GR50	
3-33	D-1114-11			14	A-572 GR50	
3-33	D-1114-11			14	A-572 GR50	
3-33	D-1114-11			14	A-572 GR50	
3-33	D-1114-11			14	A-572 GR50	
3-76	D-1114-11			2	A-572 GR50	
3-76	D-1114-11			2	A-572 GR50	
3-107	D-1114-11			2	A-572 GR50	
3-107	D-1114-11			2	A-572 GR50	

Note: The recording of false, fictitious or fraudulent statements or entries on this document may be punishable as a felony under Federal statutes.

**CAR BODY - HEAT IDENTIFICATION  
 FORM 44B - 3/12/2010**

<b>DATE :</b>	<b>BODY NUMBER:</b>
TO THE BEST OF MY KNOWLEDGE ALL INFORMATION CONTAINED IS ACCURATE	
<b>SIGNED:</b> _____ <b>KASGRO RAIL</b>	

\* Use of ASTM 572 grade 50 material is acceptable for grade 60 mat'l provided the mechanical properties for grade 60 material are satisfied

Charpy impact testing, when required, will be in accordance with ASTM A673. The minimum average absorbed energy shall be 20 ft-lbs

at zero degrees F. Transverse impact test is required for plate widths over 24 inches

PART NO.	PRINT NO.	Control Number	Melter	QTY/CAR	MATERIAL	special testing
3-109	D-1114-11			2	A-572 GR50	
3-109	D-1114-11			2	A-572 GR50	
3-29	D-1114-14			2	A-572 GR50	
3-29	D-1114-14			2	A-572 GR50	
3-30	D-1114-14			2	A-572 GR50	
3-30	D-1114-14			2	A-572 GR50	
3-38	D-1114-16			4	A-36	
3-38	D-1114-16			4	A-36	
3-38	D-1114-16			4	A-36	
3-38	D-1114-16			4	A-36	
3-39	D-1114-17			4	A-572 GR50	
3-39	D-1114-17			4	A-572 GR50	
3-39	D-1114-17			4	A-572 GR50	
3-39	D-1114-17			4	A-572 GR50	
3-40	D-1114-17			2	A-572 GR50	
3-40	D-1114-17			2	A-572 GR50	
3-41	D-1114-17			4	A-572 GR50	
3-41	D-1114-17			4	A-572 GR50	
3-41	D-1114-17			4	A-572 GR50	
3-41	D-1114-17			4	A-572 GR50	
3-42	D-1114-17			2	A-572 GR50	
3-42	D-1114-17			2	A-572 GR50	
3-75	D-1114-17			2	A-500 B	
3-75	D-1114-17			2	A-500 B	
3-150	D-1114-17			2	A-572 GR50	
3-150	D-1114-17			2	A-572 GR50	
3-151	D-1114-17			2	A-572 GR50	
3-151	D-1114-17			2	A-572 GR50	
3-153	D-1114-17			2	A-572 GR50	
3-153	D-1114-17			2	A-572 GR50	
3-154	D-1114-17			2	A-572 GR50	
3-154	D-1114-17			2	A-572 GR50	

Note: The recording of false, fictitious or fraudulent statements or entries on this document may be punishable as a felony under Federal statutes.

**CAR BODY - HEAT IDENTIFICATION  
 FORM 44B - 3/12/2010**

<b>DATE :</b> _____	<b>BODY NUMBER:</b> _____
<b>TO THE BEST OF MY KNOWLEDGE ALL INFORMATION CONTAINED IS ACCURATE</b>	
<b>SIGNED:</b> _____	<b>KASGRO RAIL</b>

\* Use of ASTM 572 grade 50 material is acceptable for grade 60 mat'l provided the mechanical properties for grade 60 material are satisfied

Charpy impact testing, when required, will be in accordance with ASTM A673. The minimum average absorbed energy shall be 20 ft-lbs

at zero degrees F. Transverse impact test is required for plate widths over 24 inches

PART NO.	PRINT NO.	Control Number	Melter	QTY/CAR	MATERIAL	special testing
3-45	D-1114-18			4	A-572 GR50	
3-45	D-1114-18			4	A-572 GR50	
3-45	D-1114-18			4	A-572 GR50	
3-45	D-1114-18			4	A-572 GR50	
3-70	D-1114-18			4	A-572 GR50	
3-70	D-1114-18			4	A-572 GR50	
3-70	D-1114-18			4	A-572 GR50	
3-70	D-1114-18			4	A-572 GR50	
3-71	D-1114-18			4	A-572 GR50	
3-71	D-1114-18			4	A-572 GR50	
3-71	D-1114-18			4	A-572 GR50	
3-71	D-1114-18			4	A-572 GR50	
3-72	D-1114-18			4	A-572 GR50	
3-72	D-1114-18			4	A-572 GR50	
3-72	D-1114-18			4	A-572 GR50	
3-72	D-1114-18			4	A-572 GR50	
3-72	D-1114-18			4	A-572 GR50	
3-74	D-1114-18			7	A-572 GR50	
3-74	D-1114-18			7	A-572 GR50	
3-74	D-1114-18			7	A-572 GR50	
3-74	D-1114-18			7	A-572 GR50	
3-74	D-1114-18			7	A-572 GR50	
3-74	D-1114-18			7	A-572 GR50	
3-74	D-1114-18			7	A-572 GR50	
3-21	D-1114-25			4	A-656 GR80	charpy
3-21	D-1114-25			4	A-656 GR80	charpy
3-21	D-1114-25			4	A-656 GR80	charpy
3-21	D-1114-25			4	A-656 GR80	charpy
3-67	D-1114-25			2	A-572 GR50	
3-67	D-1114-25			2	A-572 GR50	
3-68	D-1114-25			2	A-572 GR50	
3-68	D-1114-25			2	A-572 GR50	
3-69	D-1114-25			2	A-572 GR50	

Note: The recording of false, fictitious or fraudulent statements or entries on this document may be punishable as a felony under Federal statutes.

**CAR BODY - HEAT IDENTIFICATION**  
**FORM 44B - 3/12/2010**

<b>DATE :</b>	<b>BODY NUMBER:</b>
TO THE BEST OF MY KNOWLEDGE ALL INFORMATION CONTAINED IS ACCURATE	
<b>SIGNED:</b> _____ <b>KASGRO RAIL</b>	

\* Use of ASTM 572 grade 50 material is acceptable for grade 60 mat'l provided the mechanical properties for grade 60 material are satisfied

Charpy impact testing, when required, will be in accordance with ASTM A673. The minimum average absorbed energy shall be 20 ft-lbs

at zero degrees F. Transverse impact test is required for plate widths over 24 inches

PART NO.	PRINT NO.	Control Number	Melter	QTY/CAR	MATERIAL	special testing
3-69	D-1114-25			2	A-572 GR50	
3-131	D-1114-37			2	A-572 GR50	
3-131	D-1114-37			2	A-572 GR50	
3-133	D-1114-37			2	A-572 GR50	
3-133	D-1114-37			2	A-572 GR50	
3-134	D-1114-37			2	A-572 GR50	
3-134	D-1114-37			2	A-572 GR50	
3-136	D-1114-37			1	A-572 GR50	
3-138	D-1114-37			4	A-572 GR50	
3-138	D-1114-37			4	A-572 GR50	
3-138	D-1114-37			4	A-572 GR50	
3-138	D-1114-37			4	A-572 GR50	
3-141	D-1114-37			2	A-572 GR50	
3-141	D-1114-37			2	A-572 GR50	
3-119	D-1114-38			4	A-572 GR50	charpy
3-119	D-1114-38			4	A-572 GR50	charpy
3-119	D-1114-38			4	A-572 GR50	charpy
3-119	D-1114-38			4	A-572 GR50	charpy
3-135	D-1114-38			2	A-572 GR50	
3-135	D-1114-38			2	A-572 GR50	
3-137	D-1114-38			2	A-572 GR50	charpy
3-137	D-1114-38			2	A-572 GR50	charpy
3-143	D-1114-41			1	A-572 GR50	
3-144	D-1114-41			2	A-572 GR50	
3-144	D-1114-41			2	A-572 GR50	
3-145	D-1114-41			2	A-572 GR50	
3-145	D-1114-41			2	A-572 GR50	

Note: The recording of false, fictitious or fraudulent statements or entries on this document may be punishable as a felony under Federal statutes.

**CAR BODY - HEAT IDENTIFICATION**  
**FORM 44B - 3/12/2010**

DATE :		Bolster Number:				
TO THE BEST OF MY KNOWLEDGE ALL INFORMATION CONTAINED IS ACCURATE						
SIGNED:		KASGRO RAIL				
PART NO.	PRINT NO.	HEAT NUMBER	MELTER	QTY/ CAR	MATERIAL	special testing
3-10	D-1114-08			1	A-572-50	NO
3-12	D-1114-08			2	A-572-50	NO
3-12	D-1114-08			2	A-572-50	NO
3-13	D-1114-08			2	A-572-50	NO
3-13	D-1114-08			2	A-572-50	NO
3-14	D-1114-08			2	A-572-50	NO
3-14	D-1114-08			2	A-572-50	NO

**CAR BODY - HEAT IDENTIFICATION**  
**FORM 44B - 3/12/2010**

DATE :		Bolster Number:				
TO THE BEST OF MY KNOWLEDGE ALL INFORMATION CONTAINED IS ACCURATE						
SIGNED:		KASGRO RAIL				
PART NO.	PRINT NO.	HEAT NUMBER	MELTER	QTY/ CAR	MATERIAL	special testing
3-10	D-1114-08			1	A-572-50	NO
3-12	D-1114-08			2	A-572-50	NO
3-12	D-1114-08			2	A-572-50	NO
3-13	D-1114-08			2	A-572-50	NO
3-13	D-1114-08			2	A-572-50	NO
3-14	D-1114-08			2	A-572-50	NO
3-14	D-1114-08			2	A-572-50	NO

Appendix H-4.5 Kasgro Rail New Car Inspection Form  
 Form 5-12-B, Rev 2

Page 1 of 6			
<b>KASGRO RAIL CORP</b>			
<b>FORM 5-12-B</b>			
<b>NEW CAR INSPECTION</b>			
Rev 2	Date: 12/07/16		
Car Number _____	Job Number _____		
Wheel / Axle _____			
Part Number _____			
Wheel pressure on file		Bearing pressure on file	
MANU/MOD/C/DA/SR#	Axle	MANU/MOD/C/DA/SR#	
Left		Right	
	1		
	2		
	3		
	4		
	5		
	6		
	7		
	8		
	9		
	10		
	11		
	12		
HANDBRAKE - Model No. _____			
<b>DRAFT SYSTEM</b>			
	Part Number _____		
A End	_____		
B End	_____		
<b>TRUCKS</b>			
Part Number _____			
No.	Left side frame (buttons)	Bolster	Right side frame (buttons)
1			
2			
3			
4			
5			
6			
Span Bolster	Part Number _____		
INSPECTOR:		DATE:	

Note: The recording of false, fictitious, or fraudulent statements on this document may be punishable as a felony under federal statutes

Page 2 of 6	
<b>KASGRO RAIL CORP</b>	
<b>FORM 5-12-B</b>	
<b>NEW CAR INSPECTION</b>	
Rev 2	Date: 12/07/16
Car Number _____	Job Number _____
<b>SPRINGS - PATTERN / TYPE</b>	
Outer Coil	
Inner Coil	
Inner Inner Coil	
STABILITY DEVICE (if used)	Model Number
CLEARANCE OF SAFETY APPLIANCES - 2" Minimum --- 1/2" Perferred <input style="width: 50px;" type="text"/>	
<b>AIR BRAKES</b>	
Brake Valve	
EP 60 Serial # A-End	
EP 60 Serial # B-End	
<b>SLACK ADJUSTER</b>	
	Model Number
<b>BRAKE CYLINDER - TRUCK MOUNTED</b>	
Travel No. 1 Cylinder	Part #
Travel No. 2 Cylinder	Part #
Travel No. 3 Cylinder	Part #
Travel No. 4 Cylinder	Part #
Travel No. 5 Cylinder	Part #
Travel No. 6 Cylinder	Part #
Brake Pins & Cotter Keys	
Brake Rigging Free & Clear	
Brake Shoe 1 1/2" - 2"	
<b>CENTER WEAR PLATE LINERS</b>	
No. 1	
No. 2	
No. 3	
No. 4	
No. 5	
No. 6	
<b>INSPECTOR:</b> _____	<b>Date:</b> _____

Note: The recording of false, fictitious, or fraudulent statements on this document may be punishable as a felony under federal statutes

**KASGRO RAIL CORP  
 FORM 5-12-B**

**NEW CAR INSPECTION**

Rev 2

Date: 12/07/16

Car Number \_\_\_\_\_

Job Number \_\_\_\_\_

**SIDE BEARING CLEARANCE**

BR		BL	
CR		CL	
DR		DL	
Span BR	1/8 - 3/16"	Span BL	1/8 - 3/16"
ER		EL	
FR		FL	
AR		AL	
Span AR	1/8 - 3/16"	Span AL	1/8 - 3/16"

UNDER CAR CLEARANCE - 2 3/4" Minimum

**DIMENSIONS**

Maximum Width	
Working Deck Length	

At "A" End Right Side		At "A" End Left Side	
At Center Right Side		At Center Left Side	
At "B" End Right Side		At "B" End Left Side	

**TESTING**

Single Car Test		Golden Shoe Test	
Brake Pipe Restriction Test		Truck Curve Test	
Slack Adjuster Test		Load Test	

Couplers	Type	Height
A-End		
B-End		

INSPECTOR: \_\_\_\_\_

Date: \_\_\_\_\_

Note: The recording of false, fictitious, or fraudulent statements on this document may be punishable as a felony under federal statutes

**KASGRO RAIL CORP  
 FORM 5-12-B  
 NEW CAR INSPECTION**

Rev 2

Date: 12/07/16

LOCKNUT SECURED AGAINST CONTROL ARM NUT ON SLACK ADJUSTER TRIGGER

TRUCK LOCATION		INSPECTOR	DATE
B	YES _____ NO _____	_____	_____
C	YES _____ NO _____	_____	_____
D	YES _____ NO _____	_____	_____
E	YES _____ NO _____	_____	_____
F	YES _____ NO _____	_____	_____
A	YES _____ NO _____	_____	_____

CROSS KEY RETAINER BOLT TORQUED TO 25 FOOT LBS.		INSPECTOR	DATE
A	YES _____ NO _____	_____	_____
B	YES _____ NO _____	_____	_____

3 TABS BENT OVER FLAT AGAINST BOLT HEAD		INSPECTOR	DATE
A	YES _____ NO _____	_____	_____
B	YES _____ NO _____	_____	_____

CHECK AND RECORD LOCKING CENTER PIN TRAVEL

TRUCK LOCATION		INSPECTOR	DATE
A-OUTBOARD	_____	_____	_____
A-INBOARD	_____	_____	_____
B-OUTBOARD	_____	_____	_____
B-INBOARD	_____	_____	_____

CENTER PIN AT CAR BODY		INSPECTOR	DATE
A	_____	_____	_____
B	_____	_____	_____

CHECK AND RECORD LT. WT. STENCILED ON RAILCAR. MAKE SURE IT MATCHES LIGHTWEIGHT ON FORM 46

L _____	INSPECTOR _____	DATE _____
R _____	INSPECTOR _____	DATE _____

CHECK RAILCAR FOR 6 JACKING PADS 4 PCS. 3-42 2 PCS. 3-109

INSPECTOR _____	DATE _____
-----------------	------------

Note: The recording of false, fictitious, or fraudulent statements on this document may be punishable as a felony under federal statutes

**KASGRO RAIL CORP  
 FORM 5-12-B  
 NEW CAR INSPECTION**

Rev 2

Date: 12/07/16

MIDDLE TRUCK COVER PLATES LOCATED IN THE CORRECT POSITION-BOLTS SHOULD BE TOWARD THE OUTBOARD END OF CAR

	A	YES _____	NO _____	INSPECTOR _____	DATE _____
	B	YES _____	NO _____	_____	_____

TRUCK BOWLS LUBRICATED

	B	YES _____	NO _____	INSPECTOR _____	DATE _____
	C	YES _____	NO _____	_____	_____
	D	YES _____	NO _____	_____	_____
	E	YES _____	NO _____	_____	_____
	F	YES _____	NO _____	_____	_____
	A	YES _____	NO _____	_____	_____

SPAN BOLSTER BOWLS LUBRICATED

	A	YES _____	NO _____	INSPECTOR _____	DATE _____
	B	YES _____	NO _____	_____	_____

PROTECTING COVERS INSTALLED OVER ECP PIGTAIL CONNECTION PINS

	A	YES _____	NO _____	INSPECTOR _____	DATE _____
	B	YES _____	NO _____	_____	_____

COMPLETE AND PROPER MARKING APPLIED TO RAILCAR AND END PLATFORMS PER STENCIL DRAWING E-1114-3 REV. I

INSPECTOR _____	DATE _____
-----------------	------------

AFTER ALL AIRBRAKE TESTING IS DONE FINAL INSPECTION OF ALL SPRING SETS WHEN RAILCARS ARE FULLY ASSEMBLED, AND WITH THE RAILCAR JACKED TO REMOVE THE WEIGHT OF THE CARBODY FROM THE SPAN BOLSTER/TRUCK ASSEMBLIES

INSPECTOR _____	DATE _____
-----------------	------------

**Note:** The recording of false, fictitious, or fraudulent statements on this document may be punishable as a felony under federal statutes

Page 6 of 6

<b>KASGRO RAIL CORP</b> <b>FORM 5-12-B</b>  <b>NEW CAR INSPECTION</b>
--

Rev 2 Date: 12/07/16

CHECK SHEVE WHEEL CARRIER ASSEMBLY GAP ON SLIDING SHEVE WHEEL ASSEMBLY  
TO SPAN BOLSTER  
GAP SET TO 1/8" TO -1/16" BL AND AR

PROPER INSTALLATION OF CCSB WEAR PLATES

Truck Location		Truck Location	
BR	YES__ NO__	BL	YES__ NO__
CR	YES__ NO__	CL	YES__ NO__
DR	YES__ NO__	DL	YES__ NO__
ER	YES__ NO__	EL	YES__ NO__
FR	YES__ NO__	FL	YES__ NO__
AR	YES__ NO__	AL	YES__ NO__

INSPECTOR

DATE

\_\_\_\_\_  
\_\_\_\_\_  
Note: The recording of false, fictitious, or fraudulent statements on this document may be punishable as a felony under federal statutes

Appendix H-4.6 Kasgro Rail Certificate of Order Conformance Example

Kasgro Rail Corporation  
121 Rundle Rd. • New Castle, PA 16102  
724-658-9061 • 724-658-7639 Fax • www.kasgro.com



**KASGRO**

**CERTIFICATE OF ORDER CONFORMANCE**

**Date: January 24, 2017**

**SUPPLIER:**  
**Kasgro Rail Corp**  
**121 Rundle Rd**  
**New Castle PA 16102**

**Rail Car Number** [REDACTED]

**BPMI STANDARD IDENTIFIER NUMBER:** [REDACTED]

**WE HEARBY CERTIFY THAT WE HAVE COMPLIED WITH AAR REQUIREMENTS  
AND ALL THE REQUIREMENTS OF YOUR PURCHASE ORDER NO. K104609 THRU  
AMENDMENT NO. 12**

[REDACTED]

[REDACTED]

**TITLE**

**NOTE: The Recording of False, Fictitious or Fraudulent Statements or Entries on  
the Document may be Punishable as Felony Under Federal Statutes.**

*Specialty Rail Car Solutions*

**APPENDIX H-5**  
**BUFFER RAILCAR FABRICATION TRAVELERS**  
**KASGRO SPECIALTY RAILCAR SOLUTIONS, FORM 84, FLAT CAR ASSEMBLY FORM**  
**QA FORM 84, REV APRIL 11, 2017**

**Kasgro Specialty Railcar Solutions**  
Form 84

**Flat Car Assembly**

Quality Assurance  
Car Body Bolster Reporting Form  
Fit and Weld Car Body Bolster

Car #: \_\_\_\_\_

Inspect fit-up: \_\_\_\_\_

Weld

Inspect all welds: \_\_\_\_\_

Welders Clock # \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

All repairs to be made and forms completed before moving assembly

Group leader or foreman's Signature: \_\_\_\_\_

Date \_\_\_\_\_

Inspector's signature: \_\_\_\_\_ Date \_\_\_\_\_

## Kasgro Specialty Railcar Solutions

Form 84

### Flat Car Assembly

Quality Assurance  
Railcar Car Body Reporting Form

Fit – Side sills, Center sill, Center plates, End sills, Body bolsters and Cross bearers to railcar deck plate

Check fit-up for proper application to drawings \_\_\_\_\_

Weld

Inspect all welds: \_\_\_\_\_

Welders Clock # \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

All repairs to be made and forms completed before moving assembly

Group leader or foreman's signature: \_\_\_\_\_ Date \_\_\_\_\_

Inspector's signature: \_\_\_\_\_ Date \_\_\_\_\_

Form #84

2

April 11, 2017

## Kasgro Specialty Railcar Solutions

Form 84

### Flat Car Assembly

Quality Assurance  
Railcar Reporting Form

Fit – Bottom Cover Plate and Side Sill Gussets

Check fit-up for proper application to drawings \_\_\_\_\_

Weld

Inspect all welds: \_\_\_\_\_

Welders Clock # \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

All repairs to be made and forms completed before moving assembly

Group leader or foreman's signature: \_\_\_\_\_ Date \_\_\_\_\_

Inspector's signature: \_\_\_\_\_ Date \_\_\_\_\_

Form #84

3

April 11, 2017

## Kasgro Specialty Railcar Solutions

Form 84

### Flat Car Assembly

Quality Assurance  
Reporting form

Position #7  
Apply Airbrake, Piping

Inspection  
Inspect all parts/sub-assemblies for proper application to drawings

Inspect all welds and fastenings: \_\_\_\_\_

Welders Clock # \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

All repairs to be made and forms completed before moving assembly

Group leader or foreman's signature: \_\_\_\_\_ Date \_\_\_\_\_

Inspector's signature: \_\_\_\_\_ Date \_\_\_\_\_

**APPENDIX H-6**  
**BUFFER RAILCAR OPERATION AND**  
**MAINTENANCE INFORMATION**  
(SEE ENCLOSED APPENDIX H-6 DOCUMENT)

**APPENDIX H-7  
AAR EEC SUBMITTAL  
FOR BUFFER RAILCAR**

---

EXPERIENCE ♦ INNOVATION ♦ SOLUTIONS

---

---

**S-2043 CERTIFICATION:  
PRELIMINARY SIMULATIONS  
OF KASGRO BUFFER RAILCAR**

**REPORT P-17-023**

**for Kasgro Rail Corporation**

*Revised November 20, 2017*

---

**TCI**<sup>®</sup>  
Transportation  
Technology Center, Inc.

---

**S-2043 CERTIFICATION:  
PRELIMINARY SIMULATIONS OF  
KASGRO BUFFER RAILCAR**

**P-17-023**

**for Kasgro Rail Corporation**

Prepared by  
Russell Walker  
Shawn Trevithick

Transportation Technology Center, Inc.  
A subsidiary of the Association of American Railroads  
Pueblo, Colorado USA

***Revised November 20, 2017***

**Disclaimer:** This report was prepared for Kasgro Rail Corporation by Transportation Technology Center, Inc. (TTCI), a subsidiary of the Association of American Railroads, Pueblo, Colorado. It is based on investigations and tests conducted by TTCI with the direct participation of Kasgro Rail Corporation to criteria approved by them. The contents of this report imply no endorsements whatsoever by TTCI of products, services or procedures, nor are they intended to suggest the applicability of the test results under circumstances other than those described in this report. TTCI is not a source of information with respect to these tests, nor is it a source of copies of this report. TTCI makes no representations or warranties, either expressed or implied, with respect to this report or its contents. TTCI assumes no liability to anyone for special, collateral, exemplary, indirect, incidental, consequential, or any other kind of damages resulting from the use or application of this report or its contents.

## EXECUTIVE SUMMARY

Kasgro Rail Corporation (Kasgro) contracted with Transportation Technology Center, Inc. (TTCI) to perform vehicle dynamics modeling of their buffer railcar design according to the Association of American Railroads (AAR) *Manual of Standards and Recommended Practices* (MSRP) Standard S-2043, (S-2043) “Performance Specification for Trains Used to Carry High-Level Radioactive Material (HLRM).”<sup>1</sup> Kasgro designed the buffer railcar as part of a project with AREVA Federal Services LLC (AFS). The United States Department of Energy contracted with AFS to design the ATLAS cask car and buffer railcars for transportation of high level radioactive material.

The buffer railcar met S-2043 criteria for all S-2043 regimes except the truck side L/V criterion in buff and draft curving. The cases that did not meet were 250,000 pound draft load cases when the car was coupled between two base cars, or when coupled between the Atlas Cask car and the Rail Escort Vehicle (REV) and traveling at 15 mph. The truck side L/V ratio for both of these cases was 0.51. The S-2043 criterion for truck side L/V ratio is 0.50 and the corresponding AAR Chapter 11 criterion is 0.60.<sup>2</sup>

The four-axle car was fitted with Swing Motion<sup>®</sup> trucks. The secondary suspension uses six D7 outer springs, six D7 inner springs, two 49427-1 outer side coils, and two 49427-2 inner side coils. Primary suspension pads connect the side frames to the axles and allow the truck to steer in curves. Four vertical hydraulic dampers control the motions of the railcar. Increased lateral secondary suspension clearance (0.75 inch) and increased clearance between the transom rocker plate and side frame (0.37 inch) improve performance in the hunting analysis regime. The car is 66 feet 4 5/8 inches over pulling faces and has a truck center spacing of 44 feet 6 inches. The side bearings are long travel constant contact with a nominal preload of 8,000 pounds. The car was designed to use the AAR-1B narrow flange wheel profile.

The following three tables summarize simulation predictions for the buffer railcar in S-2043 preliminary analysis regimes. All of the cases shown in the tables that did not meet S-2043 criteria did meet the corresponding AAR Chapter 11 criteria.

---

<sup>1</sup> Association of American Railroads. Last Revised: 2009. *Manual of Standards and Recommended Practices*. Section C, Car Construction Fundamentals and Details. Standard S-2043 “Performance Specification for Trains Used to Carry High-level Radioactive Material.” Washington, DC.

<sup>2</sup> Association of American Railroads. 2011. *Manual of Standards and Recommended Practices*. Section C- Part II, Design, Fabrication, and Construction of Freight Cars, Standard M-1001, Chapter 11 “Service-worthiness Tests and Analyses for New Freight Cars.” Washington, DC.

**Summary Table (1/3)**

Description	S-2043 Paragraph	Subsection	Meets	Does Not Meet	Worst Example that does not Meet
Truck Twist Equalization	4.2.1		X		
Carbody Twist Equalization	4.2.2		X		
Static Curve Stability	4.2.3	Base Car	X		
		Like Car	X		
		Long Car	X		
		Cask Car	X		
		Long-Short Car Combination	X		
Curve Negotiation	4.2.4	Uncoupled 125-foot radius curve	X		
		Coupled 250-foot radius curve	X		
		No. 7 crossover	X		
Twist and Roll	4.3.9.6	39-foot inputs	X		
		44-ft 6-in	X		
Pitch and Bounce	4.3.9.7	39-foot inputs	X		
		44-ft 6-in inputs	X		
Yaw and Sway	4.3.9.8	39-foot inputs	X		
		44-ft 6-in inputs	X		
Dynamic Curving	4.3.9.9	39-foot inputs	X		
		44-ft 6-in inputs	X		
Single Bump	4.3.10.1		X		
Curving with Single Rail Perturbation	4.3.10.2	1-inch bump	X		
		2-inch bump	X		
		3-inch bump	X		
		1-inch dip	X		
		2-inch dip	X		
		3-inch dip	X		
Hunting	4.3.11.3		X		
Constant Curving	4.3.11.4		X		

**Summary Table (2/3)**

Description	S-2043 Paragraph	Subsection	Meets	Does Not Meet	Worst Example that Does not Meet
Curving with Various Lubrication Conditions	4.3.11.5	Case 1 New	X		
		Case 2 New	X		
		Case 3 New	X		
		Case 4 New	X		
		Case 1 Worn	X		
		Case 2 Worn	X		
		Case 3 Worn	X		
Limiting Spiral Negotiation	4.3.11.6	Entry A-End	X		
		Exit A-End	X		
		Entry B-End	X		
		Exit B-End	X		
Turnouts and Crossovers	4.3.11.7	RH Turnout	X		
		LH Turnout	X		
		Crossover	X		
Ride Quality	4.3.12	Class 2	X		
		Class 3	X		
		Class 4	X		
		Class 5	X		
		Class 6	X		
Buff and Draft Curving	4.3.13	Base-Buffer	X		
		Long-Buffer	X		
		Like-Buffer	X		
		Cask Car-Buffer	X		
		Cask Car-REV Buffer	X		
		4 Axle Loco-Cask Car Buff	X		
		6 Axle Loco-Cask Car Buff	X		
		Base-Draft		X	Truck Side L/V 0.51, Limit=0.50
		Long-Draft	X		
		Like-Draft	X		
		Cask Car-Draft	X		
		Cask Car-REV Draft		X	Truck Side L/V 0.51, Limit=0.50
		4 Axle Loco-Cask Car Buff	X		
6 Axle Loco-Cask Car Buff	X				
Braking Effects on Steering	4.3.1		X		

**Summary Table (3/3)**

Description	S-2043 Paragraph	Subsection	Meets	Does Not Meet	Worst Example that Does Not Meet
Worn Component Simulations	4.3.15				
Constant Contact Side Bearings	4.3.15	Constant Curving	X		
		Dynamic Curving	X		
		Hunting	X		
		Twist and Roll	X		
Center Plates	4.3.15	Constant Curving	X		
		Dynamic Curving	X		
		Hunting	X		
Primary Pad	4.3.15	Constant Curving – Soft	X		
		Dynamic Curving – Soft	X		
		Hunting – Soft	X		
		Constant Curving – Stiff	X		
		Dynamic Curving – Stiff	X		
		Hunting – Stiff	X		
Friction Wedges	4.3.15	Dynamic Curving	X		
		Pitch and Bounce	X		
		Twist and Roll	X		
Broken Springs	4.3.15	Dynamic Curving	X		
		Pitch and Bounce	X		
		Twist and Roll	X		
Vertical Damper	4.3.15	Dynamic Curving	X		
		Pitch and Bounce	X		
		Twist and Roll	X		

**Table of Contents**

- 1.0 Introduction ..... 1
- 2.0 Objective ..... 1
- 3.0 Procedures ..... 1
  - 3.1 Car Description ..... 1
  - 3.2 Truck Description ..... 3
  - 3.3 Track Geometry Input Data ..... 5
- 4.0 Nonstructural Static Analysis Results ..... 8
  - 4.1 Truck Twist Equalization (S-2043, Paragraph 4.2.1) ..... 8
  - 4.2 Carbody Twist Equalization (S-2043 Paragraph 4.2.2) ..... 9
  - 4.3 Static Curve Stability (S-2043, Paragraph 4.2.3) ..... 10
  - 4.4 Curve Negotiation (S-2043, Paragraph 4.2.4) ..... 11
- 5.0 Dynamic Analysis Results ..... 12
  - 5.1 Twist and Roll (S-2043, Paragraph 4.3.9.6) ..... 12
  - 5.2 Pitch and Bounce (S-2043, Paragraph 4.3.9.7) ..... 14
  - 5.3 Yaw and Sway (S-2043, Paragraph 4.3.9.8) ..... 15
  - 5.4 Dynamic Curving (S-2043, Paragraph 4.3.9.9) ..... 16
  - 5.5 Single Bump (S-2043, Paragraph 4.3.10.1) ..... 17
  - 5.6 Curving with Single Rail Perturbation (S-2043, Paragraph 4.3.10.2) ..... 18
  - 5.7 Hunting (S-2043, Paragraph 4.3.11.3) ..... 20
  - 5.8 Constant Curving (S-2043, Paragraph 4.3.11.4) ..... 21
  - 5.9 Curving with Various Lubrication Conditions (S-2043, Paragraph 4.3.11.5) ..... 23
  - 5.10 Limiting Spiral Negotiation (S-2043, Paragraph 4.3.11.6) ..... 25
  - 5.11 Turnouts and Crossovers (S-2043, Paragraph 4.3.11.7) ..... 26
  - 5.12 Ride Quality (S-2043, Paragraph 4.3.12) ..... 28
  - 5.13 Buff and Draft Curving (S-2043, Paragraph 4.3.13) ..... 30
  - 5.14 Braking Effects on Steering (S-2043, Paragraph 4.3.14) ..... 34
- 6.0 Worn Component Simulations (S-2043, Paragraph 4.3.15) ..... 35
  - 6.1 Constant Contact Side Bearing (CCSB) ..... 35
  - 6.2 Centerplate ..... 37
  - 6.3 Primary Pad ..... 39
  - 6.4 Friction Wedges ..... 40
  - 6.5 Broken Spring ..... 42
  - 6.6 Worn Vertical Dampers ..... 43
- 7.0 Observations and Conclusions ..... 45

**List of Figures**

Figure 1. Buffer Railcar ..... 1  
Figure 2. Top, Side, End, and ISO Views of the Wireframe Buffer Railcar Model ..... 2  
Figure 3. Drawing Showing the Type and Placement of Load  
Permanently Attached to the Car Deck..... 3  
Figure 4. Damping Rate Modeled for the Buffer Railcar ..... 5  
Figure 5. Twist and Roll Track Geometry Measurements and Tolerances ..... 6  
Figure 6. Pitch and Bounce Track Geometry Measurements and Tolerances ..... 6  
Figure 7. Dynamic Curving Track Geometry Measurements and Tolerances ..... 7  
Figure 8. Yaw and Sway Track Geometry Measurements and Tolerances ..... 8  
Figure 9. Truck Twist Equalization Simulation Predictions ..... 9  
Figure 10. Carbody Twist Simulation Predictions ..... 10  
Figure 11. Simulation Predictions of Minimum Vertical Wheel Load in the  
Static Curve Stability Regime ..... 11  
Figure 12. Predicted Maximum Peak-to-Peak Roll Angles in the Twist and Roll Regime ..... 13  
Figure 13. Predicted Maximum Vertical Suspension Deflections in the Pitch and Bounce  
Regime ..... 14  
Figure 14. Predicted Maximum Peak-to-Peak Lateral Acceleration for the Yaw and Sway  
Regime ..... 15  
Figure 15. Predicted Maximum Wheel L/V Ratios in the Dynamic Curving Regime ..... 16  
Figure 16. Simulation Predictions of Maximum Percent Spring Nest Capacity  
for the Single Bump Regime ..... 17  
Figure 17. Predictions of Maximum Wheel L/V Ratios for the Curving with  
Single Bump Regime ..... 19  
Figure 18. Predictions of Maximum Wheel L/V Ratios for the Curving with  
Single Dip Regime ..... 20  
Figure 19. Predicted Maximum Carbody Lateral Acceleration for the Hunting Regime ..... 21  
Figure 20. Predicted 95th Percentile Wheel L/V Ratio for the 12-degree Curve Regime ..... 22  
Figure 21. Worn Wheel Profiles on the Ground Rail Profiles ..... 23  
Figure 22. Predicted Maximum Truck Side L/V Ratio for Curving with Variation in  
Wheel Profile and Lubrication Conditions, Case 2 Friction with Worn Profiles. .... 25  
Figure 23. Predicted Maximum Wheel L/V Ratio for the Limiting Spiral Regime ..... 26  
Figure 24. Simulation Predictions of Truck Side L/V Ratio for No. 7 Turnouts ..... 27  
Figure 25. Simulation Predictions of Truck Side L/V Ratio on Crossovers ..... 28  
Figure 26. Predicted Maximum Vertical Acceleration in the Ride Quality Regime ..... 29  
Figure 27. Predicted Maximum Suspension Deflection in the Ride Quality Regime ..... 30  
Figure 28. Simulation Predictions of Truck Side L/V for the Buffer Railcar  
under 250,000 pounds Draft Force when Coupled to the Two Worst-case Cars .... 33  
Figure 29. Truck side L/V Ratio for the Buffer Railcar Coupled to the Base Car  
under 250,000 Pounds Draft Load at 15 mph ..... 34

**List of Tables**

Table 1. Geometric Parameters ..... 2  
Table 2. Mass Parameters ..... 3  
Table 3. Weights of Truck Components. .... 4  
Table 4. Truck Configuration ..... 4  
Table 5. Primary Suspension..... 4  
Table 6. Twist and Roll Simulation Predictions ..... 13  
Table 7. Pitch and Bounce Simulation Predictions ..... 14  
Table 8. Yaw and Sway Simulation Predictions ..... 15  
Table 9. Dynamic Curving Simulation Predictions ..... 16  
Table 10. Single Bump Simulation Predictions..... 17  
Table 11. Curving with Single Bump Simulation Predictions ..... 18  
Table 12. Curving with Single Dip Simulation Predictions ..... 19  
Table 13. Hunting Simulation Predictions..... 21  
Table 14. Constant Curving Simulation Predictions ..... 22  
Table 15. Wheel/Rail Coefficients of Friction for the Curving with  
Various Lubrication Conditions Regime ..... 23  
Table 16. Simulation Predictions for Curving with  
Rail Lubrication Cases 1 through 4 and New Wheels and Rails ..... 24  
Table 17. Simulation Predictions for Curving with Rail Lubrication  
Cases 1 through 4 and Hollow Worn Wheels and Ground Rails ..... 24  
Table 18. Limiting Spiral Simulation Predictions ..... 25  
Table 19. Turnout Simulation Predictions..... 26  
Table 20. Crossover Simulation Predictions..... 27  
Table 21. Ride Quality Simulation Predictions ..... 29  
Table 22. Simulation Predictions for 250,000 pounds Draft Force with Standard Cars ..... 31  
Table 23. Simulation Predictions for 250,000 pounds Draft Force with  
Cars it May be Coupled to in S-2043 Operation ..... 32  
Table 24. Simulation Predictions for 250,000 pounds Buff Force with Standard Cars ..... 32  
Table 25. Simulation Predictions for 250,000 pounds Buff Force with  
Cars it May be Coupled to in S-2043 Operation ..... 33  
Table 26. Simulation Predictions for the Braking in Curves Simulation ..... 35  
Table 27. Simulation Predictions of the Buffer Railcar with Worn CCSB in Constant Curving ... 36  
Table 28. Simulation Predictions of the Buffer Railcar with Worn CCSB in Dynamic Curving ... 36  
Table 29. Simulation Predictions of the Buffer Railcar with Worn CCSB in Hunting ..... 37  
Table 30. Simulation Predictions of the Buffer Railcar with Worn CCSB in Twist and Roll ..... 37

**List of Tables (continued)**

Table 31. Simulation Predictions of the Buffer Railcar with Worn Centerplate in Constant Curving ..... 38

Table 32. Simulation Predictions of the Buffer Railcar with Worn Centerplate in Dynamic Curving ..... 38

Table 33. Simulation Predictions of the Buffer Railcar with Worn Centerplate in Hunting ..... 38

Table 34. Simulation Predictions of the Buffer Railcar with Worn Primary Pads in Constant Curving ..... 39

Table 35. Simulation Predictions of the Buffer Railcar with Worn Primary Pads in Dynamic Curving ..... 39

Table 36. Simulation Predictions of the Buffer Railcar with Worn Primary Pads in Hunting ..... 40

Table 37. Simulation Predictions of the Buffer Railcar with Worn Wedges in Limiting Spiral ..... 40

Table 38. Simulation Predictions of the Buffer Railcar with Worn Wedges in Dynamic Curving ..... 41

Table 39. Simulation Predictions of the Buffer Railcar with Worn Friction Wedges in Pitch and Bounce ..... 41

Table 40. Simulation Predictions of the Buffer Railcar with Worn Wedges in Twist and Roll ..... 41

Table 41. Simulation Predictions of the Buffer Railcar with Broken Spring in Limiting Spiral ..... 42

Table 42. Simulation Predictions of the Buffer Railcar with Broken Spring in Dynamic Curving ..... 42

Table 43. Simulation Predictions of the Buffer Railcar with a Broken Spring in Pitch and Bounce ..... 43

Table 44. Simulation Predictions of the Buffer Railcar with Broken Spring in Twist and Roll ..... 43

Table 45. Simulation Predictions of the Buffer Railcar with Worn Vertical Dampers in Limiting Spiral ..... 44

Table 46. Simulation Predictions of the Buffer Railcar with Worn Dampers in Dynamic Curving ..... 44

Table 47. Simulation Predictions of the Buffer Railcar with Worn Vertical Dampers in Pitch and Bounce ..... 45

Table 48. Simulation Predictions of the Buffer Railcar with Worn Dampers in Twist and Roll ..... 45

## 1.0 INTRODUCTION

Kasgro Rail Corporation (Kasgro) contracted with Transportation Technology Center, Inc. (TTCI) to perform vehicle dynamics modeling of their buffer railcar design according to the Association of American Railroads (AAR) *Manual of Standards and Recommended Practices* (MSRP) Standard S-2043, "Performance Specification for Trains Used to Carry High-Level Radioactive Material (HLRM)." Kasgro designed the buffer railcar as part of a project with AREVA Federal Services LLC (AFS). The United States Department of Energy contracted with AFS to design the ATLAS cask car and buffer railcars for transportation of HLRM.

## 2.0 OBJECTIVE

The objective of this work is to estimate the performance of the buffer railcar in analysis regimes specified in Standard S-2043.

## 3.0 PROCEDURES

### 3.1 Car Description

Figure 1 shows an image of the buffer railcar. Figure 2 shows a wireframe model of the NUCARS<sup>®3</sup> system file.


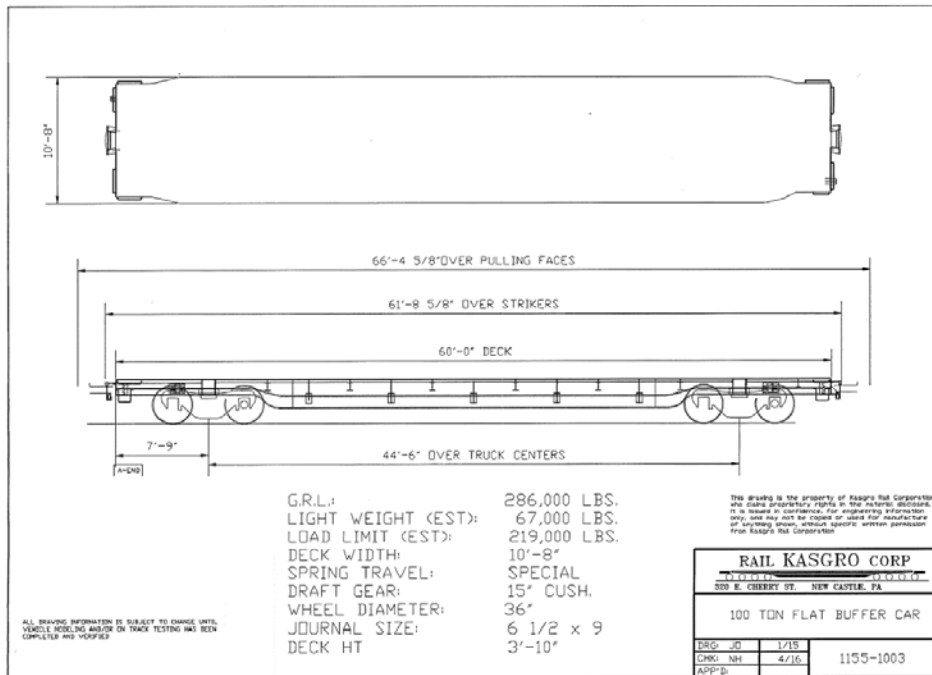


Figure 1. Buffer Railcar

<sup>3</sup> NUCARS<sup>®</sup> is a registered trademark of Transportation Technology Center, Inc.

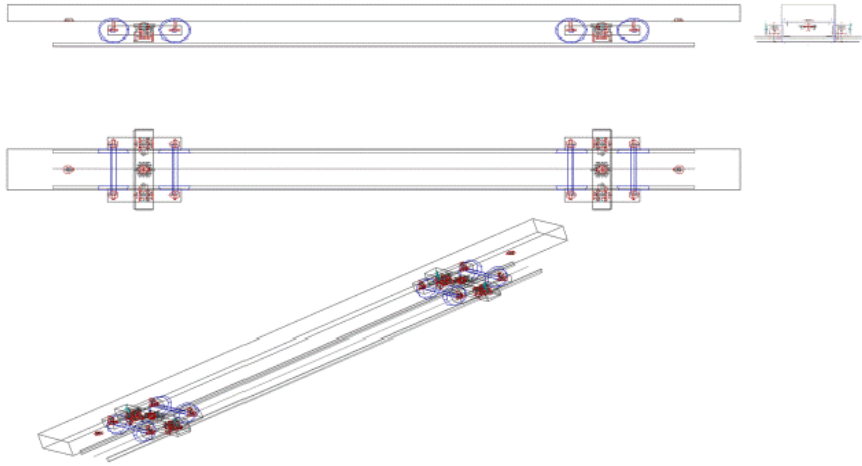


**Figure 2. Top, Side, End, and ISO Views of the Wireframe Buffer Railcar Model**

Table 1 shows the geometric properties of the railcar. Initial modeling showed that the empty buffer railcar (at a gross weight of 67,000 pounds) had high truck side L/V ratios in the buff and draft curving regime. To alleviate this, additional weight was added in the model. The model met buff and draft curving requirements at a gross rail load of 263,000 pounds. This required a ballast weight of 196,000 pounds, which would be permanently added to the railcar as steel plates, see Figure 3. Table 2 shows the mass properties of the buffer car. The empty car numbers are based on the data Kasgro provided for the carbody from the ANSYS® structural analysis model. They reflect an additional 3,000 pounds of weight and translation of the moments of inertia from their original location to the carbody center of gravity.

**Table 1. Geometric Parameters**

Parameter	Dimensions
Length over Pulling Faces (in Draft)	796.625 inches
Truck Center Spacing	534 inches
Axle Spacing	72 inches
Coupler Length (Pin to coupling line)	43 inches
Cushion Unit Travel	15 inches

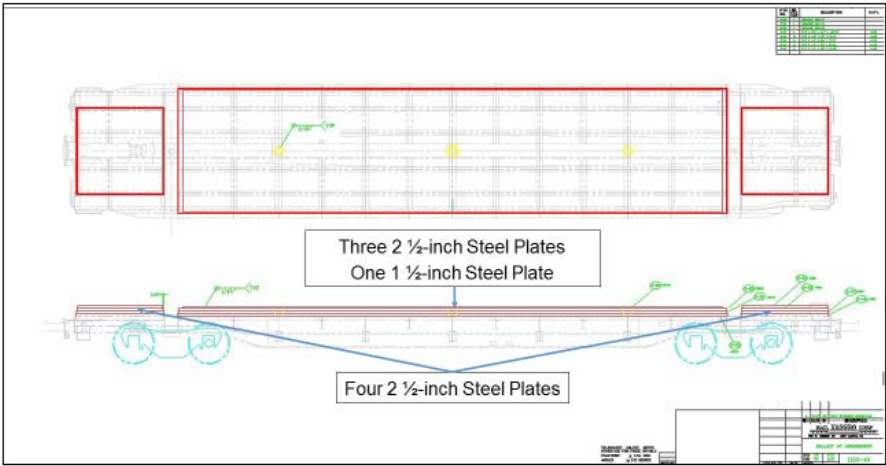

**Figure 3. Drawing Showing the Type and Placement of Load Permanently Attached to the Car Deck**

**Table 2. Mass Parameters**

Parameter	Value for Empty Car	Value for the Ballasted Car
Longitudinal CG offset	0 inch	0 inch
Lateral CG offset	0 inch	0 inch
Vertical CG from top of rail	33.28 inches	44.79 inches
Carbody Weight	45,088 pounds	241,001 pounds
Mass	116.78 lb-s <sup>2</sup> /in	624.21 lb-s <sup>2</sup> /in
I <sub>xx</sub> (about the CG)	109,186 lb-s <sup>2</sup> /in	666,491 lb-s <sup>2</sup> /in
I <sub>yy</sub> (about the CG)	4,806,665 lb-s <sup>2</sup> /in	24,030,830 lb-s <sup>2</sup> /in
I <sub>zz</sub> (about the CG)	4,895,437 lb-s <sup>2</sup> /in	24,632,397 lb-s <sup>2</sup> /in

The car is symmetrical. Simulations of the car were done in one orientation only.

The carbody and ballast load were modeled as one single body because the load is permanently attached to the car. The first mode of torsion, vertical, and lateral bending are modeled on the carbody. Bending properties were provided by Kasgro from finite element analysis (FEA) of the empty car body with known loads applied. FEA-predicted displacements were matched in NUCARS<sup>®</sup> using the same loads and restraints by adjusting the flexible body input parameters. In practice, the stiffness of the ballast load may affect the stiffness of the car. Care should be taken during single car tests to check this effect.

**3.2 Truck Description**

Kasgro plans to use Amsted 100-ton Swing Motion<sup>®</sup> trucks equipped with hydraulic vertical dampers in the buffer railcar. The truck model, including the geometry, mass properties, and pad stiffness values, is based on the model TTCI created of the Kasgro M290 12-axle HLRM

railcar. The 12-axle railcar model predictions were compared to test results to develop confidence in the model inputs (TTCI proprietary report number P-10-044). This section contains a brief description of the trucks.

Table 3 shows the weight of the truck components in the NUCARS® model. The weights of smaller components like the rocker seats and the bearing adapters are not included in the model individually, but are lumped together with the side frames, bolster, and transom.

**Table 3. Weights of Truck Components.**

Truck Component	Modeled Weight
Two side frames	2,831 pounds
Bolster	1,750 pounds
Transom	539 pounds
Total Truck Weight including hardware and springs	5,120 pounds

Except for the transom, all of the bodies that make up the truck are modeled as rigid. The first torsional mode along the y-axis is modeled for the transom in order to more correctly predict the truck twist equalization performance.

Table 4 shows the truck configuration modeled.

**Table 4. Truck Configuration**

Part	Description
Secondary Suspension	Six D7 Outer Coils, Six D7 Inner Coils, Two 49427-1, Two 49427-2
Primary suspension	Adapter Plus Pads, ASF part number 10522A
Side bearings	Miner TCC-III 80LT
Friction wedge	Amsted part number 1-9249
Bearings and adapters	K class 61/2x9 bearings with 6 1/2x9 special adapter ASF part number 10532A
Center bowl liner	Metal horizontal liner
Vertical Hydraulic Dampers	Koni 04 Series using damping rate shown in Figure 4

Table 5 shows the primary suspension characteristics as modeled for the buffer railcar.

**Table 5. Primary Suspension**

Part	Description
Longitudinal Stiffness	22,500 lbs./in.
Longitudinal Clearance	0.625 inch
Lateral Stiffness	48,000 lbs./in.
Lateral Clearance	0.25 inch
Vertical Stiffness	500,000 lbs./in.

The friction wedges used in this truck have a 45-degree wedge angle, a composition vertical face, and a steel slope face.

The trucks are designed to use vertical hydraulic dampers. The damping characteristics used for the simulations are for a Koni 04 series damper using the damping rate shown in Figure 4.

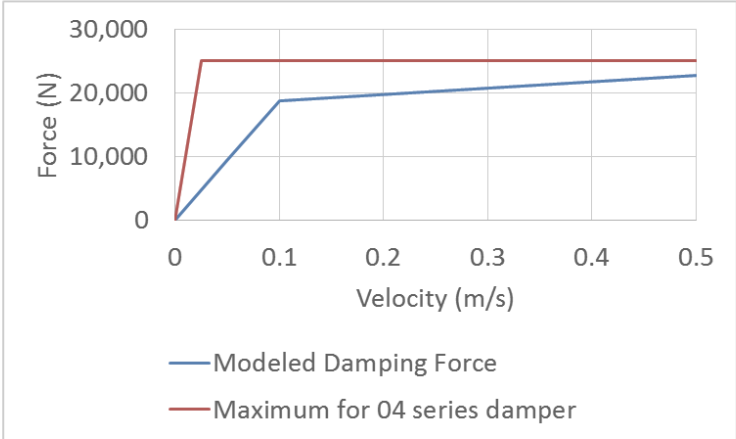



Figure 4. Damping Rate Modeled for the Buffer Railcar

### 3.3 Track Geometry Input Data

The regimes of twist and roll, pitch and bounce, yaw and sway, and dynamic curving were modeled using measured track geometry of the actual test zones at the Transportation Technology Center (TTC) in Pueblo, Colorado. TTCI’s experience has shown that simulations using measured track geometry as inputs generally produce more realistic results than simulations using mathematically generated inputs. In this section, measured track geometry inputs are compared to the track geometry standards listed in AAR MSRP Section C-II, Standard M-1001 Chapter 11, paragraph 11.5.2.5 for twist and roll, pitch and bounce, yaw and sway, and dynamic curving. Each relevant geometry measurement is shown on the plot and the tolerances specified in Chapter 11 table 11.2 are shown in red.


The wavelength of the inputs for each of the actual test zones at TTC is 39 feet. The inputs were scaled to perform additional simulations with wavelength equal to the buffer car’s truck center spacing of 44.5 feet.

The twist and roll regime consists of a series of 10 3/4-inch vertical track deviations offset on each rail to input roll motions to the car. Figure 5 shows the cross level and gage measurements from the inputs used for the twist and roll simulations. The cross level and gage measurements are within tolerances.

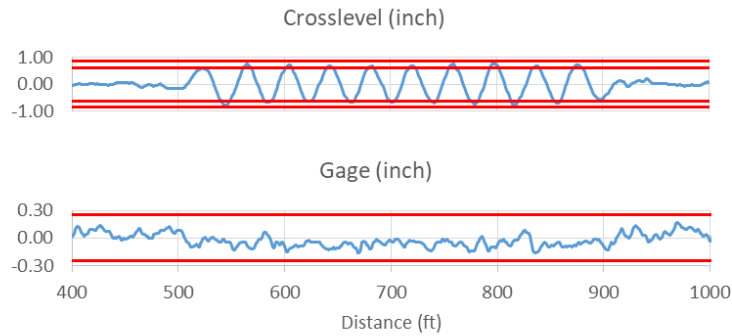


**Figure 5. Twist and Roll Track Geometry Measurements and Tolerances**

The pitch and bounce regime consists of a series of 10 3/4-inch vertical track deviations on each rail to input vertical motions to the car. Figure 6 shows profile, cross level and gage measurements from the inputs used for pitch and bounce simulations. One-half inch was added to the profile measurement so the bottom of the perturbations were about zero and the peak amplitude tolerance of 0.75-inch  $\pm$ 0.125 inch could be easily marked on the plot. The actual shape of the profile of the track at the ends of the zone is somewhat distorted by the measurement system filters. The cross level is slightly higher than the tolerance about 50 feet beyond the end of the zone, but is otherwise within tolerance. The gage is within tolerance.

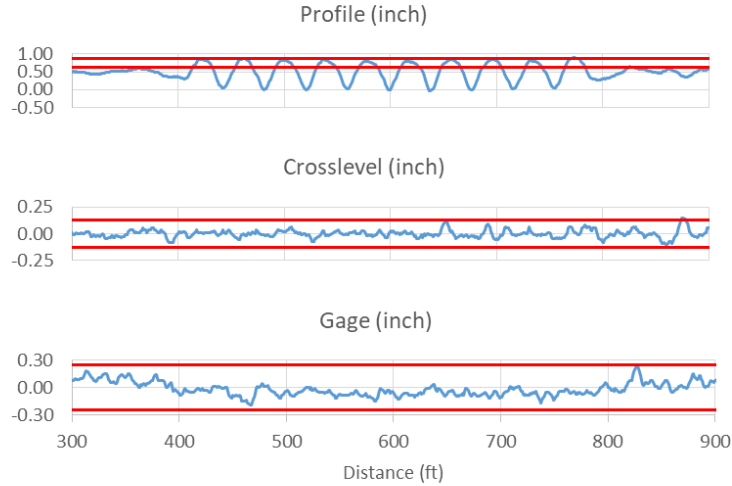


**Figure 6. Pitch and Bounce Track Geometry Measurements and Tolerances**

The dynamic curve section is on a 10-degree curve with 4 inches superelevation. The dynamic curving regime consists of a series of 0.5-inch vertical track deviations offset on each rail to input roll motions to the car. At the same time, the gage of the track changes from 56.5 inches to 57.5 inches to input lateral motions to the car. Figure 7 shows the gage, cross level, and superelevation measurements and tolerances for the inputs used for dynamic curving simulations. The gage and cross level are within the tolerance. The superelevation is consistently higher than the tolerance through most of the test zone. The effect of this will be to make the simulation regime more severe for the lower speed condition.

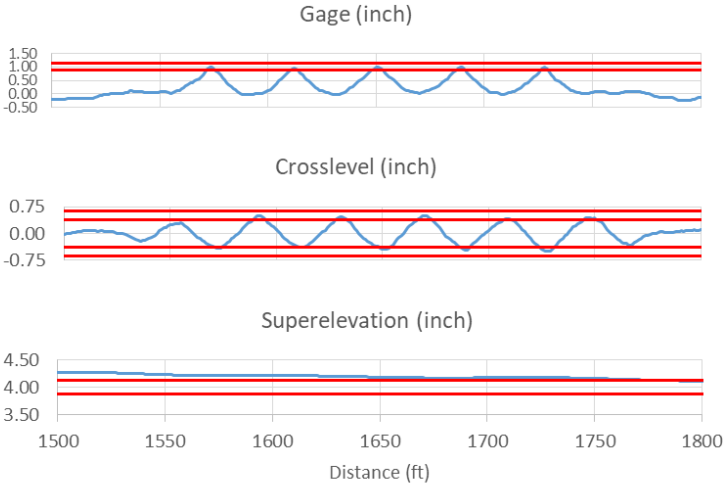

**Figure 7. Dynamic Curving Track Geometry Measurements and Tolerances**

The yaw and sway regime consists of a series of 1.25-inch lateral track deviations on a section with 1-inch wide gage to input lateral and yaw motions to the car. Figure 8 shows the gage, cross level, and alignment measurements and tolerance for the inputs used for yaw and sway simulations. The gage varies more than the tolerance allows, dropping below 0.875 and rising higher than 1.125 in a few locations. The cross level is within tolerance. The alignment has one perturbation at the beginning of the zone with amplitude slightly higher than the tolerance.

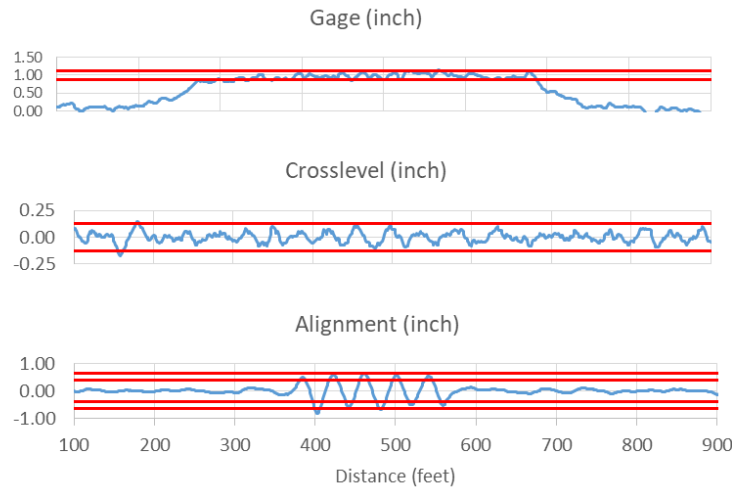

**Figure 8. Yaw and Sway Track Geometry Measurements and Tolerances**

#### **4.0 NONSTRUCTURAL STATIC ANALYSIS RESULTS**

Nonstructural static analysis simulations were conducted according to Paragraph 4.2 of Standard S-2043. The nonstructural static analysis regimes are designed to demonstrate truck and car performance under static conditions of track twist or curve negotiation. In each of the following sections the regime is briefly described and data relevant to the criterion is presented.

##### **4.1 Truck Twist Equalization (S-2043, Paragraph 4.2.1)**

S-2043 requires the truck twist equalization regime to verify the design has adequate truck load equalization performance. Truck load equalization performance is the ability of a truck to distribute vertical load to all the wheels in a truck when negotiating a short wavelength track twist deviation. The analysis is performed by simulating raising and lowering one wheel in a truck from 0 to 3 inches in 0.5-inch increments. This analysis was performed for each wheel in the car. The requirement is that all wheel loads must remain above 60 percent of the nominal static wheel load when displaced 2 inches, and above 40 percent of the nominal static wheel load when displaced 3 inches.

Figure 9 shows a plot of the simulation predictions. The worst-case predictions are 86.6 percent wheel load when a wheel is displaced 2 inches, and 81.1 percent wheel load when a wheel is displaced 3 inches. The simulation predictions meet the requirements of the truck twist equalization regime.

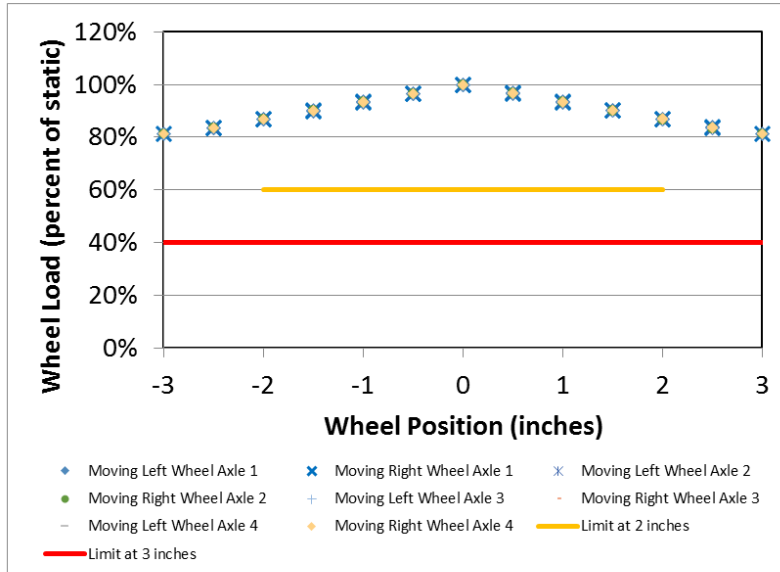


Figure 9 Truck Twist Equalization Simulation Predictions

**4.2 Carbody Twist Equalization (S-2043 Paragraph 4.2.2)**

S-2043 requires the carbody twist equalization regime to simulate wheel unloading during carbody twist. Carbody twist occurs when the car is negotiating a spiral or a long wavelength track-twist deviation. The analysis is performed by simulating the raising and lowering of the two wheels of the truck at one end of the car from 0 to 3 inches in 0.5-inch increments. This analysis was performed for each corner of the car. The requirement is that all wheel loads must remain above 60 percent of the nominal static wheel load when displaced 2 inches and above 40 percent of the nominal static wheel load when displaced 3 inches.

Figure 10 shows a plot of carbody twist performance. The worst-case simulation predictions are 79 percent minimum vertical wheel load when displaced 2 inches, and 76 percent minimum vertical wheel load when displaced 3 inches. The simulation predictions meet the requirements of the carbody twist regime.


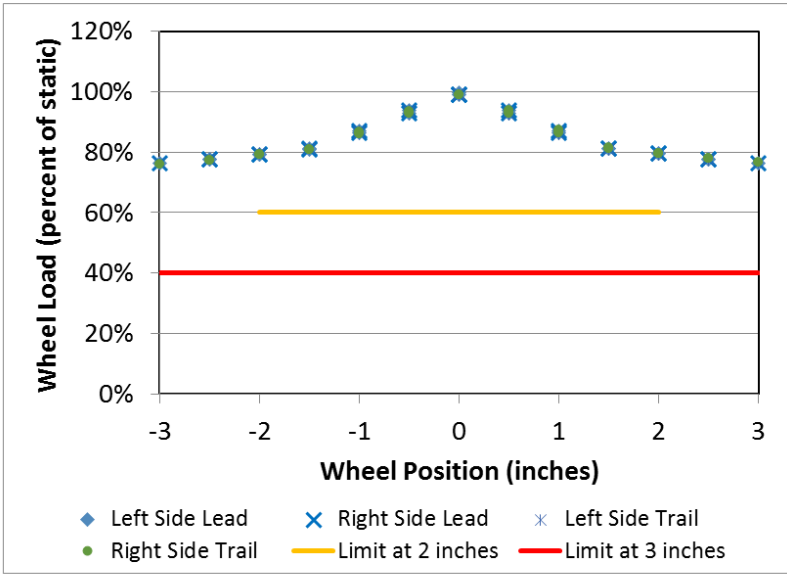


Figure 10. Carbody Twist Simulation Predictions

**4.3 Static Curve Stability (S-2043, Paragraph 4.2.3)**

The static curve stability analysis regime in S-2043 refers to the curve stability test in AAR Chapter 11, Paragraph 11.3.3.3. The curve stability regime requires the car be subjected to a 200,000-pound buff load and a 200,000-pound draft load while placed on a curve of no less than 10 degrees. The curve may have no more than 0.5 inch superelevation. The test car will be coupled to a base car or a like car (whichever is more severe) and a long car with 90-foot over strikers, 66-foot truck centers, 60-inch couplers, and conventional draft gear. The combination of the long car and base car is typically tested, and was included in the simulations. In addition, S-2043 requires that the analysis be performed with the car coupled to cars it will be coupled to in HLRM train operation. In this case, a cask car that is a span bolter design with length over pulling faces of 78 feet 1 1/4 inches, span bolster pivot spacing of 38 feet, span bolster spacing of 38 feet 6 inches, and a coupler length of 43 inches. The requirement is that no wheel lift and no suspension separation may occur for this analysis.

Figure 11 shows simulation predictions of minimum vertical wheel load for the five cases of coupled cars analyzed. No wheel lift occurred. The simulation predictions were checked for suspension separation at the centerplate, side bearings, coil springs, transom-to-sideframe connection, and primary pads by verifying that all of those connections were carrying vertical load. No suspension separation was found. The simulation predictions meet the requirements of the curve stability regime.

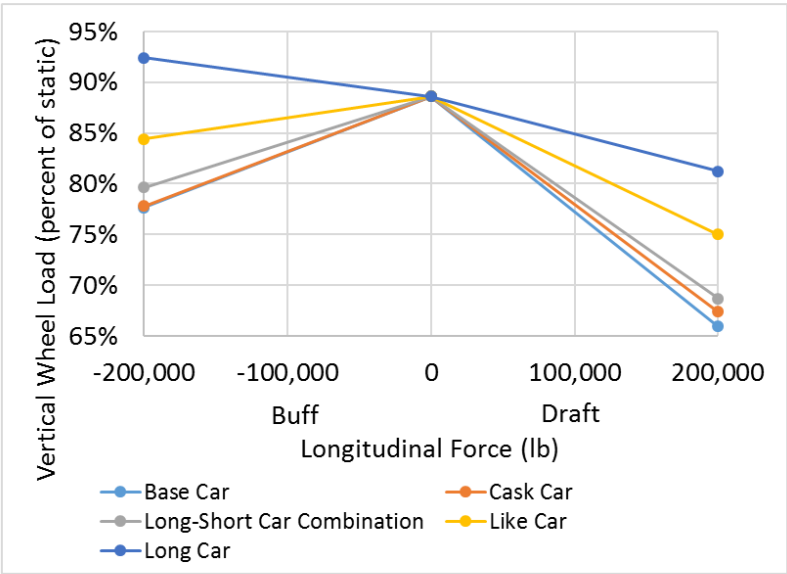

**Figure 11. Simulation Predictions of Minimum Vertical Wheel Load in the Static Curve Stability Regime**

**4.4 Curve Negotiation (S-2043, Paragraph 4.2.4)**

Curve negotiation calculations were performed with NUCARS® simulations. The buffer railcar has a truck center spacing of 44 feet 6 inches and a length over pulling faces of couplers of 66 feet 4 5/8 inches. For these dimensions, the AAR MSRP Section C-II, Standard M-1001, Chapter 2, Paragraph 2.1.4.2<sup>4</sup> requires the car be designed to negotiate a 275-foot radius curve when coupled and a 150-foot radius curve when uncoupled.

TTCI simulated the uncoupled car negotiating a 150-foot radius curve using NUCARS®. No wheel lift occurred. The simulations predictions were checked for suspension separation at the centerplate, side bearings, the coil springs, the transom-to-sideframe connection, and the primary pads by verifying that all of those connections were carrying vertical load. No suspension separation was found.

TTCI simulated the car negotiating a 275-foot radius curve while coupled to a base car, a like car, and a cask car that the buffer railcar may be coupled to in HLRM service. No wheel lift occurred. The simulations predictions were checked for suspension separation at the centerplate, side bearings, the coil springs, the transom-to-sideframe connection, and the primary pads by verifying that all of those connections were carrying vertical load. No suspension separation was found.

<sup>4</sup> Association of American Railroads. 2011. *Manual of Standards of Recommended Practices*. Section C-II Design, Fabrication, and Construction of Freight Cars, Standard M-1001, Chapter 2, General Data, Paragraph 2.1.4.2 "Horizontal Curve and Tangent." Washington, DC.

TTCI simulated the car negotiating a No. 7 crossover on 13-foot centers while coupled to a base car, a like car, and a cask car that the buffer railcar may be coupled to in HLRM service. No wheel lift occurred. The simulation predictions were checked for suspension separation at the centerplate, side bearings, coil springs, transom-to-sideframe connection, and the primary pads by verifying that all of those connections were carrying vertical load. No suspension separation was found.

The simulation predictions meet the requirements of the curve negotiation regime.

## **5.0 DYNAMIC ANALYSIS RESULTS**

Dynamic analysis simulations were conducted according to Paragraph 4.3 of S-2043.

In this section, each analysis regime is briefly described, followed by the simulation predictions for that analysis regime. Tables show predicted values for each regime compared to the criteria presented in Table 4.1 of AAR Standard S-2043. Predicted values that do not meet the criteria are shown in red bold font. Predicted values that are at the criteria level are shown in black bold font. Plots showing data trends are provided. Where criteria differ between S-2043 and AAR MSRP Section C-II, Standard M-1001, Chapter 11, “Service-worthiness Tests and Analyses for New Freight Cars” (AAR Chapter 11), criteria for both standards are shown on the plots.

Lateral carbody acceleration standard deviation is calculated over a 1,000-foot section. In many cases, the simulation regime is less than 1,000 feet. In those cases, that metric and criterion are not applicable and are designated with the term “NA.”

Simulations were performed using a coefficient of friction of 0.5 between the wheel and rail. AAR-1B narrow flange wheel profiles were used for all cases except those where specific worn profiles were called for in the specification.

Measured rail profiles from the actual test zones at Transportation Technology Center, Pueblo, CO were used where applicable. Where no actual test zone existed, new 136-pound rail with 10-inch crown radius was used.

Simulation predictions were made using inputs created with measured track geometry. TTCI’s experience has shown that simulations with measured track geometry produce better predictions of car performance than that obtained with analytic track inputs created via mathematical functions. Because the measured track geometry inputs contain short wavelengths that cause spurious peaks in the data, the 50-millisecond and 3-foot analysis windows described in AAR Chapter 11 and S-2043 are used when analyzing data to produce the most realistic results.


### **5.1 Twist and Roll (S-2043, Paragraph 4.3.9.6)**

Simulations of the twist and roll regime were conducted according to Paragraph 4.3.9.6 of S-2043. The twist and roll regime consists of a series of 3/4-inch vertical track deviations offset on each rail to input roll motions to the car. Simulations of 39-foot and 44-foot 6-inch wavelengths were performed.

Table 6 shows the worst-case simulation predictions for twist and roll. Figure 12 shows the maximum peak-to-peak roll angles plotted against speed to show the trend in performance. Simulation predictions meet S-2043 criteria for twist and roll.

**Table 6. Twist and Roll Simulation Predictions**

Criterion	Limiting Value	39-foot inputs	44.5-foot inputs
Maximum carbody roll angle (degree)	4.0	1.6	1.8
Maximum wheel L/V	0.80	0.11	0.11
Maximum truck side L/V	0.50	0.09	0.09
Minimum vertical wheel load (%)	25	69	70
Peak-to-peak carbody lateral acceleration (g)	1.30	0.27	0.26
Maximum carbody lateral acceleration (g)	0.75	0.15	0.13
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.16	0.16
Maximum vertical suspension deflection (%)	95	40	40

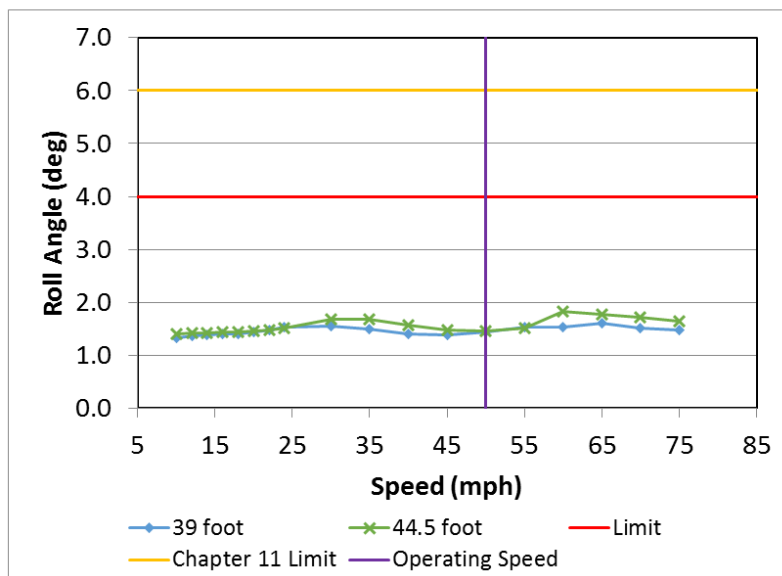

**Figure 12. Predicted Maximum Peak-to-Peak Roll Angles in the Twist and Roll Regime**


**5.2 Pitch and Bounce (S-2043, Paragraph 4.3.9.7)**

Simulations of the pitch and bounce regime were conducted according to Paragraph 4.3.9.7 of S-2043. The pitch and bounce regime consists of a series of 3/4-inch vertical track deviations in parallel on each rail to input vertical motions to the car. Simulations of 39-foot and 44-foot 6-inch wavelengths were performed.

Table 7 shows the worst-case simulation predictions for pitch and bounce. Figure 13 shows the maximum vertical suspension deflection plotted against speed to show the trend in performance. Simulation predictions meet S-2043 criteria for pitch and bounce.

**Table 7. Pitch and Bounce Simulation Predictions**

Criterion	Limiting Value	39-foot inputs A-End	44.5-foot inputs A-End
Maximum carbody roll angle (degree)	4.0	0.2	0.2
Maximum wheel L/V	0.80	0.06	0.08
Maximum truck side L/V	0.50	0.05	0.06
Minimum vertical wheel load (%)	25	60	65
Peak-to-peak carbody lateral acceleration (g)	1.30	0.12	0.19
Maximum carbody lateral acceleration (g)	0.75	0.06	0.12
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.65	0.47
Maximum vertical suspension deflection (%)	95	74	61

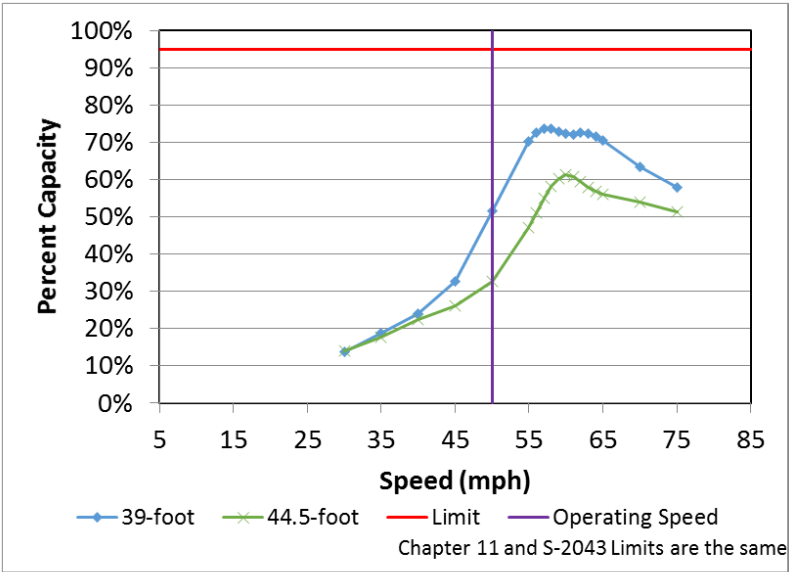

**Figure 13. Predicted Maximum Vertical Suspension Deflections in the Pitch and Bounce Regime**


**5.3 Yaw and Sway (S-2043, Paragraph 4.3.9.8)**

Simulations of the yaw and sway regime were conducted according to Paragraph 4.3.9.8 of S-2043. The yaw and sway regime consists of a series of 1.25-inch lateral track deviations on a section with 1-inch wide gage to input lateral and yaw motions to the car. Simulations of 39-foot and 44-foot 6-inch wavelengths were performed.

Table 8 shows the worst-case simulation predictions for yaw and sway. Figure 14 shows the maximum peak-to-peak lateral acceleration plotted against speed to show the trend in performance. Simulation predictions meet S-2043 criteria for yaw and sway

**Table 8. Yaw and Sway Simulation Predictions**

Criterion	Limiting Value	39-foot Inputs	44.5-foot Inputs
Maximum carbody roll angle (degree)	4.0	1.3	2.0
Maximum wheel L/V	0.80	0.62	0.51
Maximum truck side L/V	0.50	0.30	0.24
Minimum vertical wheel load (%)	25	56	51
Peak-to-peak carbody lateral acceleration (g)	1.30	1.16	1.25
Maximum carbody lateral acceleration (g)	0.75	0.59	0.65
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.18	0.16
Maximum vertical suspension deflection (%)	95	37	42

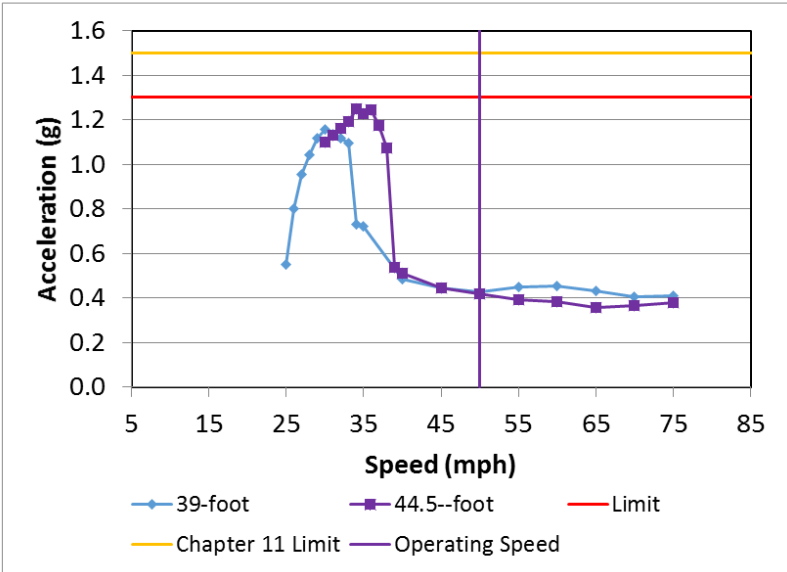

**Figure 14. Predicted Maximum Peak-to-Peak Lateral Acceleration for the Yaw and Sway Regime**


**5.4 Dynamic Curving (S-2043, Paragraph 4.3.9.9)**

Simulations of the dynamic curving regime were conducted according to Paragraph 4.3.9.9 of S-2043. The dynamic curve section is on a 10-degree curve with 4 inches superelevation. The dynamic curving regime consists of a series of 0.5-inch vertical track deviations offset on each rail to input roll motions to the car. At the same time, the gage of the track changes from 56.5 inches to 57.5 inches to input lateral motions to the car. Simulations of 39-foot and 44-foot 6-inch wavelengths were performed. Speeds ranging from 3 inches underbalance to 3 inches overbalance are simulated.

Table 9 shows the worst-case simulation predictions for dynamic curving. Figure 15 shows the maximum wheel L/V ratios plotted against speed to show the trend in performance. Simulation predictions meet S-2043 criteria for dynamic curving.

**Table 9. Dynamic Curving Simulation Predictions**

Criterion	Limiting Value	CW 39-foot	CCW 39-foot	CW 44.5-foot	CCW 44.5-foot
Maximum carbody roll angle (degree)	4.0	0.9	1.0	1.1	1.0
Maximum wheel L/V	0.80	0.53	0.50	0.50	0.47
Maximum truck side L/V	0.50	0.24	0.25	0.22	0.23
Minimum vertical wheel load (%)	25	62	62	64	63
Peak-to-peak carbody lateral acceleration (g)	1.30	0.40	0.41	0.32	0.27
Maximum carbody lateral acceleration (g)	0.75	0.27	0.28	0.23	0.19
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.09	0.09	0.10	0.08
Maximum vertical suspension deflection (%)	95	31	33	32	28

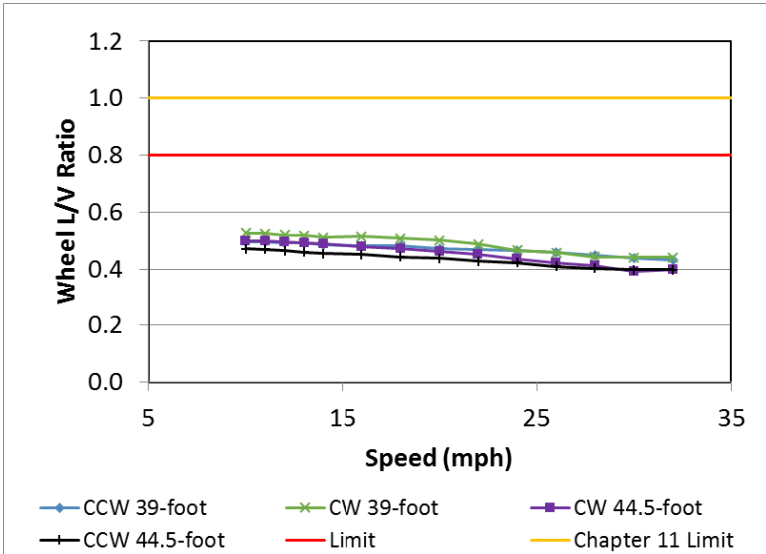

**Figure 15. Predicted Maximum Wheel L/V Ratios in the Dynamic Curving Regime**


**5.5 Single Bump (S-2043, Paragraph 4.3.10.1)**

Simulations of the single-bump regime were conducted according to Paragraph 4.3.10.1 of S-2043. The single-bump regime consists of a flat-topped vertical profile deviation with 1-inch amplitude. The initial change is 1 inch in 7 feet, followed by a steady elevation of 1 inch for 20 feet, and finishing with a ramp back to normal elevation over 7 feet. No standard test zone exists for the single-bump regime, but measured track geometry from a test performed in 2009 was used as input for the simulation.

Table 10 shows the worst-case simulation predictions for the single bump. Figure 16 shows the maximum suspension deflection plotted against speed to show the trend in performance. Simulation predictions meet S-2043 criteria for the single bump.

**Table 10. Single Bump Simulation Predictions**

Criterion	Limiting Value	Single Bump
Maximum carbody roll angle (degree)	4.0	0.0
Maximum wheel L/V	0.80	0.02
Maximum truck side L/V	0.50	0.01
Minimum vertical wheel load (%)	25	94
Peak-to-peak carbody lateral acceleration (g)	1.30	0.02
Maximum carbody lateral acceleration (g)	0.75	0.01
Lateral carbody acceleration standard deviation (g)	0.13	NA
Maximum carbody vertical acceleration (g)	0.90	0.33
Maximum vertical suspension deflection (%)	95	31

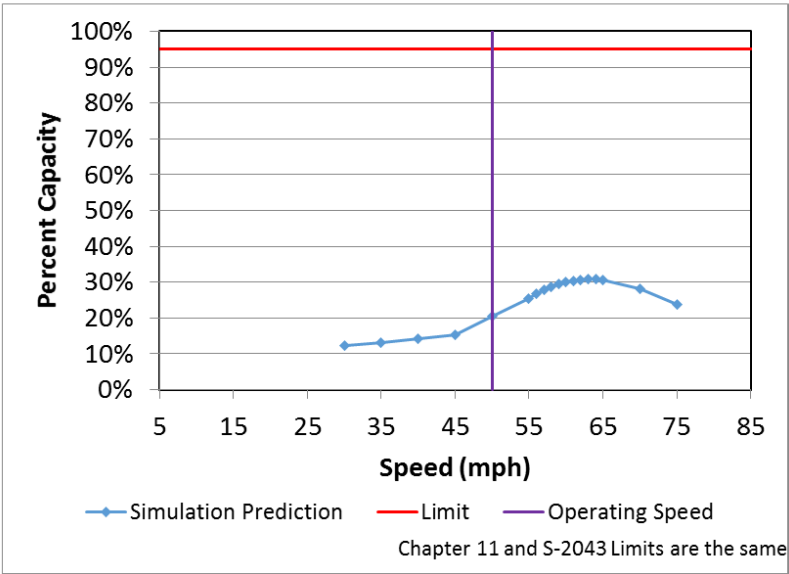

**Figure 16. Simulation Predictions of Maximum Percent Spring Nest Capacity for the Single Bump Regime**

**5.6 Curving with Single Rail Perturbation (S-2043, Paragraph 4.3.10.2)**

Simulations of the curving with single rail perturbation regime were conducted according to Paragraph 4.3.10.2 of S-2043. The curving with single rail perturbation regime is located on a 12-degree curve with no superelevation. Simulations were made for 1-, 2-, and 3-inch outside rail dips and for 1-, 2-, and 3-inch inside rail bumps. The perturbation is a flat-topped ramp with an elevation change over 6 feet, a steady elevation over 12 feet, ramping to the original elevation over 6 feet. The inputs for this simulation regime were mathematically generated because no actual test zone exists. Tests of a 2-inch bump and dip were performed in 2009, but inputs from measurements of those perturbations were less severe than the analytic inputs and were not used for the simulations reported here. S-2043 prescribes that the simulations be made in 2-mph increments from 4 mph to 14 mph for the 1- and 2-inch amplitude perturbations. The maximum speed over the 3-inch perturbations shall be 10 mph.

Table 11 shows the worst-case simulation predictions for the curving with single bump regime. Figure 17 shows the maximum wheel L/V ratio plotted against speed to show the trend in performance. Table 12 and Figure 18 show the corresponding information for the curving with single dip simulations. Simulation predictions meet S-2043 criteria for the curving with single rail perturbation regime.

**Table 11. Curving with Single Bump Simulation Predictions**

Criterion	Limiting Value	1-inch	2-inch	3-inch
Maximum carbody roll angle (degree)	4.0	0.7	1.7	2.6
Maximum wheel L/V	0.80	0.49	0.55	0.58
Maximum truck side L/V	0.50	0.28	0.29	0.31
Minimum vertical wheel load (%)	25	72	66	63
Peak-to-peak carbody lateral acceleration (g)	1.30	0.07	0.11	0.10
Maximum carbody lateral acceleration (g)	0.75	0.05	0.07	0.06
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.07	0.10	0.10
Maximum vertical suspension deflection (%)	95	25	38	48

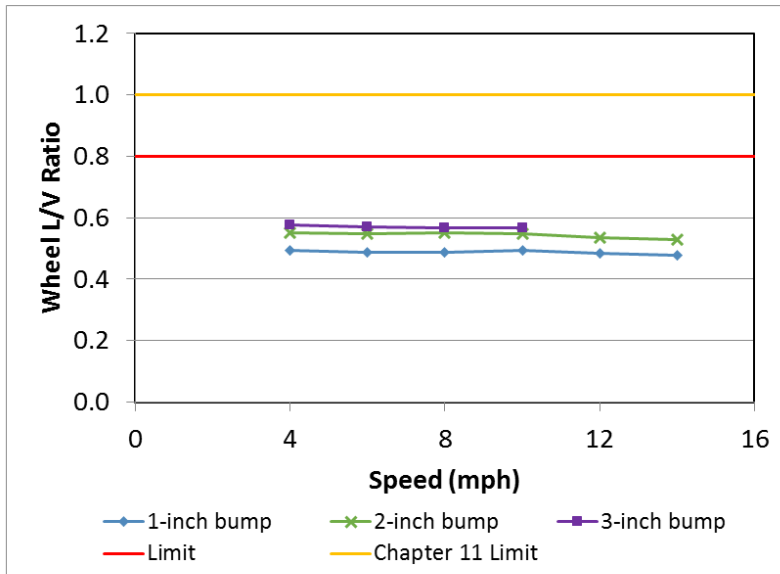


Figure 17. Predictions of Maximum Wheel L/V Ratios for the Curving with Single Bump Regime

Table 12. Curving with Single Dip Simulation Predictions

Criterion	Limiting Value	1-inch	2-inch	3-inch
Maximum carbody roll angle (degree)	4.0	0.7	1.7	2.6
Maximum wheel L/V	0.80	0.49	0.57	0.62
Maximum truck side L/V	0.50	0.28	0.29	0.31
Minimum vertical wheel load (%)	25	73	67	65
Peak-to-peak carbody lateral acceleration (g)	1.30	0.07	0.11	0.11
Maximum carbody lateral acceleration (g)	0.75	0.05	0.07	0.06
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.07	0.11	0.11
Maximum vertical suspension deflection (%)	95	27	35	41

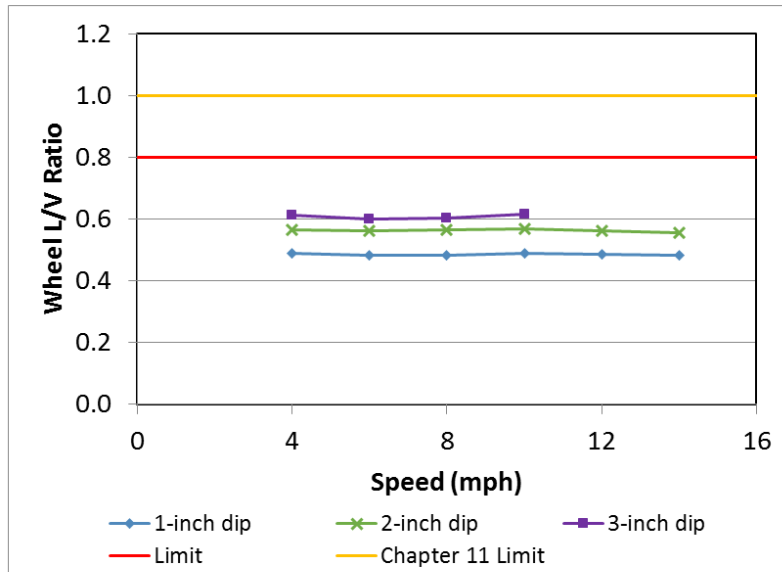


Figure 18. Predictions of Maximum Wheel L/V Ratios for the Curving with Single Dip Regime


**5.7 Hunting (S-2043, Paragraph 4.3.11.3)**

Simulations of the hunting regime were conducted according to Paragraph 4.3.11.3 of S-2043. The hunting regime was modeled using a 7,900-foot section of measured track geometry from the Railroad Test Track (RTT) at TTC. The inputs include 5,500 feet of tangent track followed by a 2,400-foot section with a spiral and a portion of a 50-minute curve with 6 inches of superelevation. These simulations were performed with KR wheel profiles as specified by AAR Chapter 11, Paragraph 11.7.2.

Table 13 shows the worst-case simulation predictions for the hunting regime. Figure 19 shows the maximum lateral carbody acceleration standard deviation over 1,000 feet plotted against speed to show the trend in performance. Simulation predictions meet S-2043 criteria for the hunting regime.

**Table 13. Hunting Simulation Predictions**

Criterion	Limiting Value	Simulation Predictions
Maximum carbody roll angle (degree)	4.0	0.4
Maximum wheel L/V	0.80	0.21
Maximum truck side L/V	0.50	0.19
Minimum vertical wheel load (%)	25	66
Peak-to-peak carbody lateral acceleration (g)	1.30	0.41
Maximum carbody lateral acceleration (g)	0.75	0.30
Lateral carbody acceleration standard deviation (g)	0.13	0.09
Maximum carbody vertical acceleration (g)	0.90	0.24
Maximum vertical suspension deflection (%)	95	31

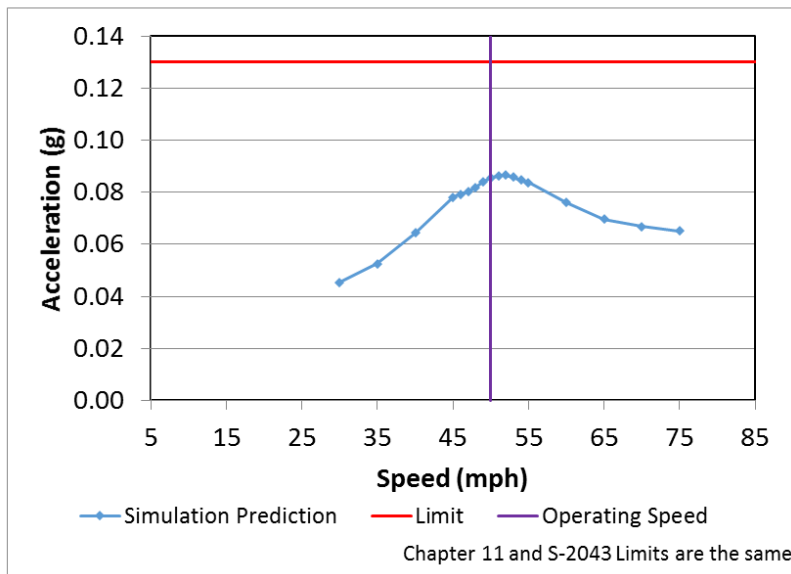

**Figure 19. Predicted Maximum Carbody Lateral Acceleration for the Hunting Regime**

**5.8 Constant Curving (S-2043, Paragraph 4.3.11.4)**

Simulations of the constant curving regime were conducted according to Paragraph 4.3.11.4 of S-2043. The constant curving test regime was modeled using measured track geometry from the 7.5-, 10-, and 12-degree curves of the Wheel-Rail Mechanism (WRM) loop at TTC.


Simulation predictions presented for constant curving include the 95th percentile wheel L/V ratio for the steady curve portion of the inputs. This criterion is not listed in Table 4.1 of the S-2043 design paragraph, but it is listed in Table 5.1 of the S-2043 single car test paragraph. The

95th percentile wheel L/V ratio is relevant to these simulations, because the simulations are performed with measured track geometry inputs rather than ideal track geometry.

Table 14 shows the worst-case simulation predictions for the constant curving regime. Figure 20 shows the 95th percentile wheel L/V ratio plotted against speed for the 12-degree curve to show the trend in performance. The simulation predictions meet S-2043 criteria.

**Table 14. Constant Curving Simulation Predictions**

Criterion	Limiting Value	CW	CCW
Maximum carbody roll angle (degree)	4.0	0.5	0.4
Maximum wheel L/V	0.80	0.52	0.50
95% Wheel L/V Ratio	0.60	0.40	0.44
Maximum truck side L/V	0.50	0.34	0.31
Minimum vertical wheel load (%)	25	69	68
Peak-to-peak carbody lateral acceleration (g)	1.30	0.21	0.24
Maximum carbody lateral acceleration (g)	0.75	0.15	0.16
Lateral carbody acceleration standard deviation (g)	0.13	0.04	0.04
Maximum carbody vertical acceleration (g)	0.90	0.15	0.14
Maximum vertical suspension deflection (%)	95	36	37

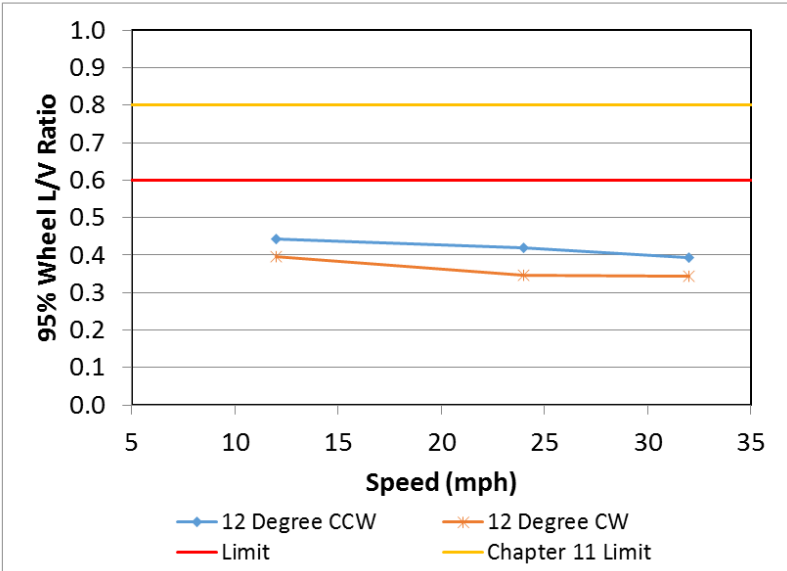

**Figure 20. Predicted 95th Percentile Wheel L/V Ratio for the 12-degree Curve Regime**

**5.9 Curving with Various Lubrication Conditions (S-2043, Paragraph 4.3.11.5)**

Simulation of curving with various lubrication conditions were performed according to S-2043, Paragraph 4.3.11.5. Constant curving simulations were repeated in a 10-degree curve with the coefficient of friction conditions shown in Table 15. Simulations were performed using a new wheel profile on a new rail profile and with a hollow wheel profile on a ground rail profile. Figure 21 shows the worn wheel and rail profiles used for the simulations. The right side is the high rail in this plot. The gap between the rail profile in red and the wheel profile in blue on the gage corner of the rail represents a distinctive two point contact condition. The lubrication and profile conditions are designed to show performance when the wheelset cannot provide normal steering forces. The metrics presented in this section were computed over the steady curve portion of the input, excluding the entry and exit spiral.

**Table 15. Wheel/Rail Coefficients of Friction for the Curving with Various Lubrication Conditions Regime**

Friction Coefficient	High Rail Crown	High Rail Gage Face	Low Rail Crown
Case 1	0.5	0.5	0.5
Case 2	0.5	0.2	0.5
Case 3	0.5	0.2	0.2
Case 4	0.2	0.2	0.5



**Figure 21. Worn Wheel Profiles on the Ground Rail Profiles.**

The wheelset is shifted to the high rail in the position it would be in a left hand curve.

Table 16 shows simulation predictions for the four friction cases with new wheel profiles. Table 17 shows simulation predictions for the four friction cases with hollow worn wheel profiles and ground rail profiles. Figure 22 shows a plot of maximum truck side L/V ratio versus speed for Case 2 friction with worn wheel profiles to show the trend in performance. Simulations predictions meet S-2043 criteria.

**Table 16. Simulation Predictions for Curving with Rail Lubrication Cases 1 through 4 and New Wheels and Rails**

Criterion	Limiting Value	Case 1 New	Case 2 New	Case 3 New	Case 4 New
Maximum carbody roll angle (degree)	4.0	0.5	0.5	0.5	0.5
Maximum wheel L/V	0.80	0.52	0.53	0.38	0.56
95% Wheel L/V Ratio	0.60	0.41	0.45	0.32	0.54
Maximum truck side L/V	0.50	0.28	0.30	0.24	0.45
Minimum vertical wheel load (%)	25	68	68	68	67
Peak-to-peak carbody lateral acceleration (g)	1.30	0.17	0.17	0.18	0.16
Maximum carbody lateral acceleration (g)	0.75	0.14	0.14	0.16	0.15
Lateral carbody acceleration standard deviation (g)	0.13	0.04	0.04	0.04	0.03
Maximum carbody vertical acceleration (g)	0.90	0.14	0.14	0.14	0.14
Maximum vertical suspension deflection (%)	95	35	35	35	35

**Table 17. Simulation Predictions for Curving with Rail Lubrication Cases 1 through 4 and Hollow Worn Wheels and Ground Rails**

Criterion	Limiting Value	Case 1 Worn	Case 2 Worn	Case 3 Worn	Case 4 Worn
Maximum carbody roll angle (degree)	4.0	0.5	0.5	0.5	0.5
Maximum wheel L/V	0.80	0.56	0.60	0.40	0.56
95% Wheel L/V Ratio	0.60	0.52	0.57	0.35	0.53
Maximum truck side L/V	0.50	0.46	0.49	0.23	0.48
Minimum vertical wheel load (%)	25	62	60	62	63
Peak-to-peak carbody lateral acceleration (g)	1.30	0.18	0.20	0.20	0.19
Maximum carbody lateral acceleration (g)	0.75	0.16	0.15	0.15	0.15
Lateral carbody acceleration standard deviation (g)	0.13	0.04	0.04	0.04	0.04
Maximum carbody vertical acceleration (g)	0.90	0.13	0.14	0.14	0.13
Maximum vertical suspension deflection (%)	95	35	35	35	35

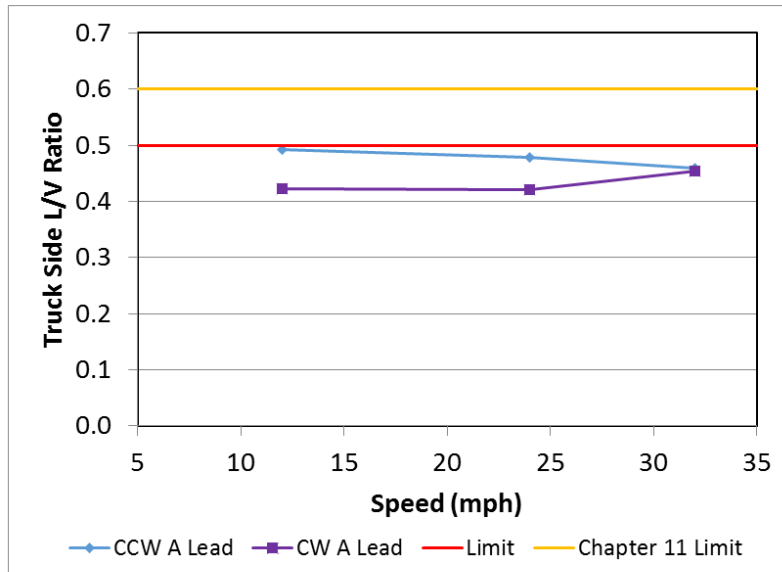


Figure 22. Predicted Maximum Truck Side L/V Ratio for Curving with Variation in Wheel Profile and Lubrication Conditions, Case 2 Friction with Worn Profiles

#### 5.10 Limiting Spiral Negotiation (S-2043, Paragraph 4.3.11.6)

Simulations of the limiting spiral regime were conducted according to Paragraph 4.3.11.6 of S-2043. The limiting spiral has a steady curvature change from 0 to 10 degrees and a steady superelevation change from 0 to 4 3/8 inches in 89 feet.

Table 18 shows the worst-case simulation predictions for the limiting spiral regime. Figure 23 shows the maximum wheel L/V plotted against speed to show the trend in performance. Simulation predictions meet S-2043 criteria for the limiting spiral regime.

Table 18. Limiting Spiral Simulation Predictions

Criterion	Limiting Value	Spiral Entry	Spiral Exit
Maximum carbody roll angle (degree)	4.0	0.6	0.7
Maximum wheel L/V	0.80	0.42	0.51
Maximum truck side L/V	0.50	0.23	0.29
Minimum vertical wheel load (%)	25	67	64
Peak-to-peak carbody lateral acceleration (g)	1.30	0.14	0.20
Maximum carbody lateral acceleration (g)	0.75	0.10	0.15
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.10	0.10
Maximum vertical suspension deflection (%)	95	36	39

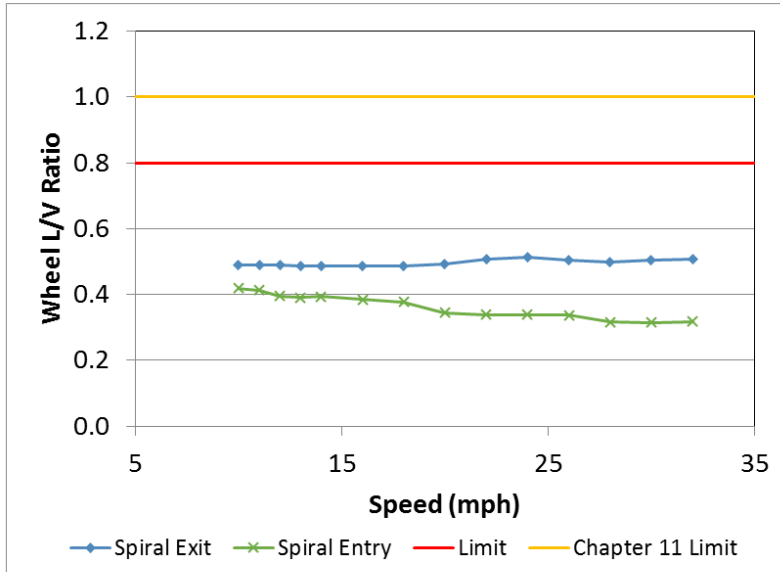


Figure 23. Predicted Maximum Wheel L/V Ratio for the Limiting Spiral Regime


**5.11 Turnouts and Crossovers (S-2043, Paragraph 4.3.11.7)**

Simulations of the turnout and crossover regime were conducted according to Paragraph 4.3.11.7 of S-2043. Simulations were performed through a No. 7 AREMA straight point turnout and a No. 7 crossover on 13-foot track centers at speeds up to 15 mph. The inputs for this simulation regime were mathematically generated because no actual test zone exists.

Table 19 shows the worst-case simulation predictions for the turnout regime. Figure 24 shows a plot of truck side L/V ratio in a No. 7 turnout. Simulation predictions meet S-2043 criteria for the turnout regimes.

Table 19. Turnout Simulation Predictions

Criterion	Limiting Value	No. 7 Turnout Left Hand	No. 7 Turnout Right Hand
Maximum carbody roll angle (degree)	4.0	0.3	0.3
Maximum wheel L/V	0.80	0.59	0.59
Maximum truck side L/V	0.50	0.47	0.47
Minimum vertical wheel load (%)	25	77	77
Peak-to-peak carbody lateral acceleration (g)	1.30	0.19	0.19
Maximum carbody lateral acceleration (g)	0.75	0.11	0.11
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.23	0.22
Maximum vertical suspension deflection (%)	95	16	16

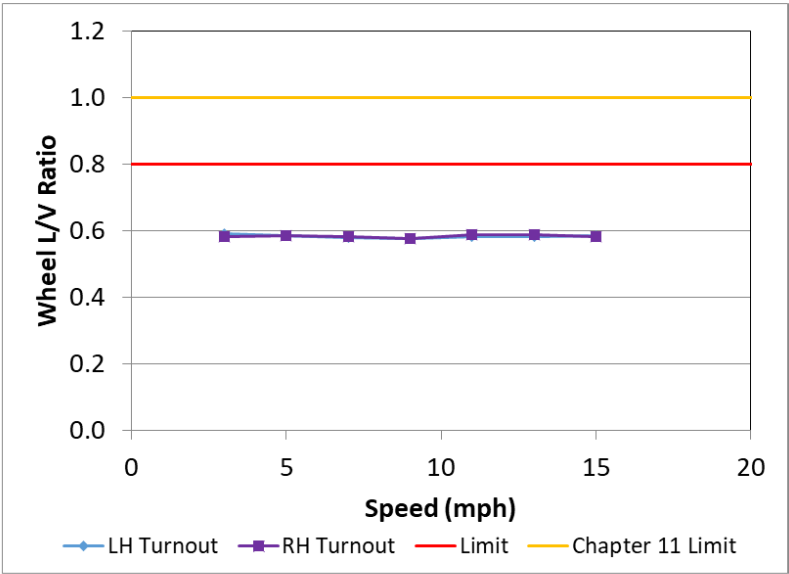

**Figure 24. Simulation Predictions of Truck Side L/V Ratio for No. 7 Turnouts**

Table 20 shows the worst-case simulation predictions for the crossover regime. Figure 25 shows a plot of truck side L/V ratio in the crossovers. Simulation predictions meet S-2043 criteria for the No. 7 crossover.

**Table 20. Crossover Simulation Predictions**

Criterion	Limiting Value	No. 7 Crossover
Maximum carbody roll angle (degree)	4.0	0.3
Maximum wheel L/V	0.80	0.68
Maximum truck side L/V	0.50	0.49
Minimum vertical wheel load (%)	25	75
Peak-to-peak carbody lateral acceleration (g)	1.30	0.21
Maximum carbody lateral acceleration (g)	0.75	0.13
Lateral carbody acceleration standard deviation (g)	0.13	NA
Maximum carbody vertical acceleration (g)	0.90	0.17
Maximum vertical suspension deflection (%)	95	23

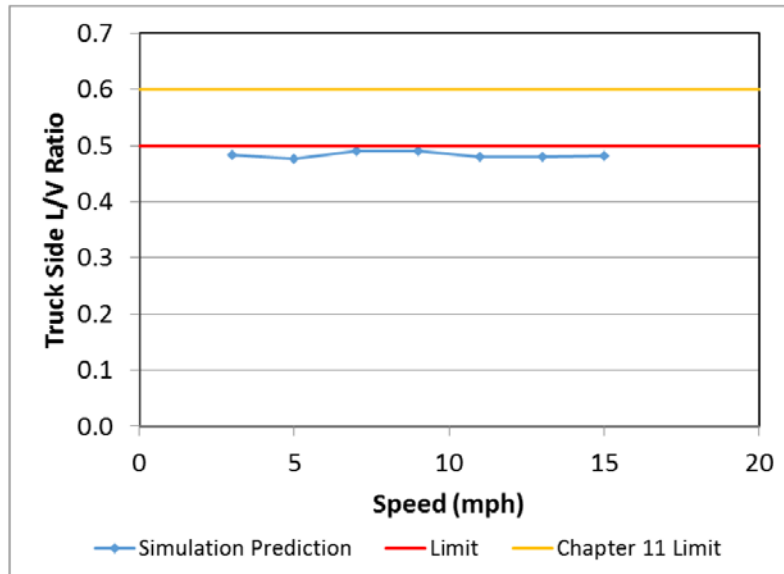


Figure 25. Simulation Predictions of Truck Side L/V Ratio on Crossovers

### 5.12 Ride Quality (S-2043, Paragraph 4.3.12)

Simulations of the ride quality regime were conducted according to Paragraph 4.3.12 of S-2043. Simulations were performed over standardized track geometry files representing track allowed under Federal Railroad Administration (FRA) designations of Class 2 through Class 6. These track geometry files are provided by the AAR. Simulations speeds were from 10 mph to the FRA freight speed limit for each track class. The track geometry files are described briefly below:

- Class 2 Inputs. 74,000 feet of track including curves up to 10 degrees
- Class 3 Inputs. 28,000 feet of track including curves up to 3 degrees
- Class 4 Inputs. 22,000 feet of tangent track
- Class 5 Inputs. 6,700 feet of tangent track
- Class 6 Inputs. 16,000 feet of tangent track

S-2043 Paragraph 4.3.12.4 requires simulation of non-passenger carrying railcars on these track classes. The predictions are compared to the performance criteria in Table 4.1 of S-2043.

Table 21 shows the worst-case simulation predictions for the ride quality simulations. Figure 26 shows a plot of the predicted maximum vertical acceleration in the ride quality regime. Figure 27 shows a plot of the maximum suspension displacement in the ride quality regime. Simulation predictions meet S-2043 criterion in the ride quality regime.

Table 21. Ride Quality Simulation Predictions

Criterion	Limiting Value	Class 2	Class 3	Class 4	Class 5	Class 6
Maximum carbody roll angle (degree)	4.0	1.6	0.9	0.7	0.7	0.9
Maximum wheel L/V	0.80	0.52	0.18	0.18	0.16	0.14
Maximum truck side L/V	0.50	0.34	0.13	0.12	0.11	0.11
Minimum vertical wheel load (%)	25	71	62	58	65	55
Peak-to-peak carbody lateral acceleration (g)	1.30	0.34	0.25	0.47	0.36	0.34
Maximum carbody lateral acceleration (g)	0.75	0.18	0.16	0.29	0.19	0.18
Lateral carbody acceleration standard deviation (g)	0.13	0.04	0.04	0.06	0.07	0.07
Maximum carbody vertical acceleration (g)	0.90	0.21	0.57	0.66	0.51	0.58
Maximum vertical suspension deflection (%)	95	36	71	91	56	63

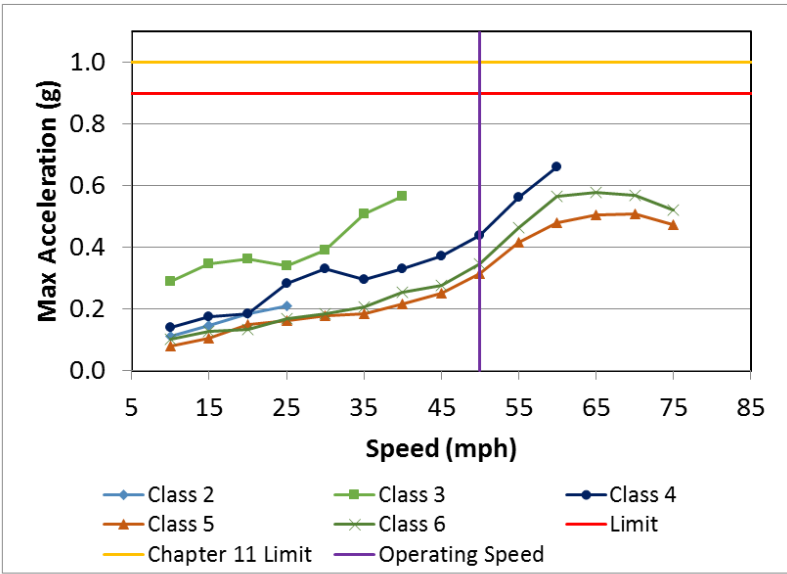


Figure 26. Predicted Maximum Vertical Acceleration in the Ride Quality Regime

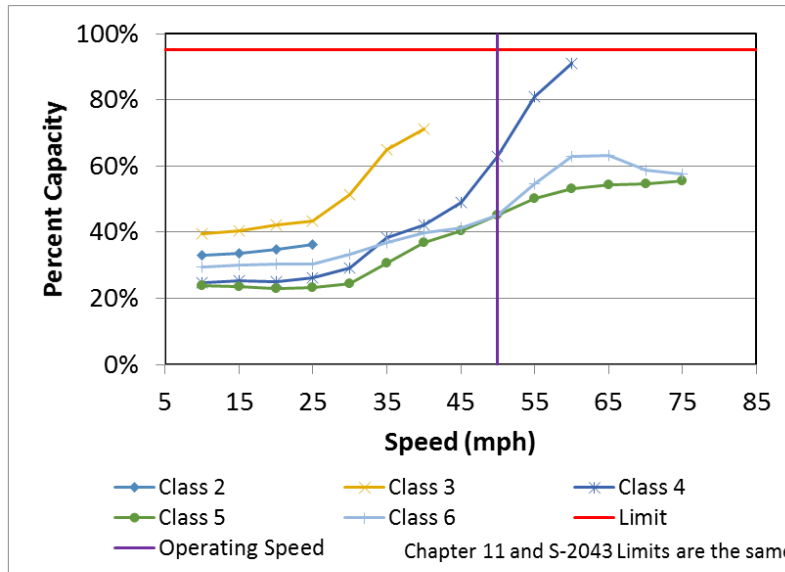


Figure 27. Predicted Maximum Suspension Deflection in the Ride Quality Regime

### 5.13 Buff and Draft Curving (S-2043, Paragraph 4.3.13)

Simulations of the buff and draft curving regime were conducted according to Paragraph 4.3.13 of S-2043. Simulations were performed using measured track geometry of the 12-degree curve of the WRM Loop at TTC. Simulations were designed to simulate the car coupled to:

- A base car as described in the AAR MSRP Section C-II, Standard M-1001 Chapter 2, Paragraph 2.1.4.2.3.<sup>5</sup>
- A long car having 90-foot over strikers, 66-foot truck centers, 60-inch couplers, and conventional draft gear.
- Like Car.
- Atlas cask car: a car the buffer railcar may be coupled to in HLRM service.
- Rail Escort Vehicle: a car the buffer railcar may be coupled to in HLRM service.
- Four-axle Locomotive: a vehicle to which the buffer railcar may be coupled in HLRM service.
- Six-axle Locomotive: a vehicle to which the buffer railcar may be coupled in HLRM service

The geometry of the coupled cars was modeled so that the longitudinal forces of 250,000-pounds buff and 250,000-pounds draft were applied to the car in the simulation. The lateral component of the force was calculated using the method presented in AAR MSRP Section C-II,

<sup>5</sup> Association of American Railroads. 2011. *Manual of Standards of Recommended Practices*. Section C-II Design, Fabrication, and Construction of Freight Cars, Standard M-1001, Chapter 2. General Data, Paragraph 2.1.4.2.3 "Base Car." Washington, DC.

Standard M-1001 Chapter 2, Paragraph 2.1.6.4 and 2.1.6.5. The longitudinal and lateral forces were applied in the model using external force connection elements.

Table 22 shows the worst-case simulation predictions for draft force cases when the buffer railcar is coupled to the standard cars required in Chapter 2, and Table 23 shows the worst-case simulation predictions for the draft force cases when the car is coupled to cars it may be coupled to in S-2043 service. Table 24 and Table 25 show the corresponding data for buff loads. Simulation predictions do not meet S-2043 for the truck side L/V criterion when the buffer railcar is coupled to the base car or when coupled between the cask car and the rail escort vehicle (REV) under draft load. These truck side L/V exceptions occur in the body of the curve on the lead truck low rail at underbalance speed. Simulation predictions meet S-2043 criteria for all other conditions. Figure 28 shows a plot of the maximum truck side L/V ratio versus speed when the buffer railcar is coupled to the base car and the REV under 250,000-pounds draft load. Figure 29 shows a distance plot of the truck side L/V ratio for the buffer railcar coupled to the base car under 250,000-pounds draft load at 15 mph. The column headings in Tables 22 through 25 list the cars that the buffer car is coupled between.

**Table 22. Simulation Predictions for 250,000 pounds Draft Force with Standard Cars**

Criterion	Limiting Value	Base-Long	Base-Base	Long-Long	Like-Like
Maximum carbody roll angle (degree)	4.0	0.7	0.7	0.6	0.6
Maximum wheel L/V	0.80	0.54	0.54	0.51	0.53
Maximum truck side L/V	0.50	0.48	<b>0.51</b>	0.38	0.44
Minimum vertical wheel load (%)	25	58	59	76	69
Peak-to-peak carbody lateral acceleration (g)	1.30	0.12	0.13	0.12	0.12
Maximum carbody lateral acceleration (g)	0.75	0.13	0.14	0.12	0.13
Lateral carbody acceleration standard deviation (g)	0.13	0.03	0.03	0.04	0.03
Maximum carbody vertical acceleration (g)	0.90	0.12	0.13	0.12	0.12
Maximum vertical suspension deflection (%)	95	50	58	44	49

**Table 23. Simulation Predictions for 250,000 pounds Draft Force with Cars it May be Coupled to in S-2043 Operation**


Criterion	Limiting Value	Cask Car-Cask Car	Cask-REV	6-Axle Loco-Cask	4-Axle Loco-Cask
Maximum carbody roll angle (degree)	4.0	0.7	0.6	0.7	0.7
Maximum wheel L/V	0.80	0.54	0.54	0.53	0.53
Maximum truck side L/V	0.50	<b>0.50</b>	<b>0.51</b>	0.47	0.45
Minimum vertical wheel load (%)	25	61	61	67	61
Peak-to-peak carbody lateral acceleration (g)	1.30	0.13	0.14	0.12	0.13
Maximum carbody lateral acceleration (g)	0.75	0.13	0.13	0.13	0.13
Lateral carbody acceleration standard deviation (g)	0.13	0.03	0.03	0.04	0.03
Maximum carbody vertical acceleration (g)	0.90	0.13	0.13	0.12	0.12
Maximum vertical suspension deflection (%)	95	56	56	46	50

**Table 24. Simulation Predictions for 250,000 pounds Buff Force with Standard Cars**


Criterion	Limiting Value	Base-Long	Base-Base	Long-Long	Like-Like
Maximum carbody roll angle (degree)	4.0	0.5	0.6	0.5	0.5
Maximum wheel L/V	0.80	0.46	0.52	0.44	0.47
Maximum truck side L/V	0.50	0.38	0.39	0.29	0.33
Minimum vertical wheel load (%)	25	55	56	72	64
Peak-to-peak carbody lateral acceleration (g)	1.30	0.13	0.14	0.13	0.15
Maximum carbody lateral acceleration (g)	0.75	0.13	0.13	0.13	0.15
Lateral carbody acceleration standard deviation (g)	0.13	0.03	0.03	0.04	0.04
Maximum carbody vertical acceleration (g)	0.90	0.12	0.12	0.12	0.11
Maximum vertical suspension deflection (%)	95	52	54	41	47

**Table 25. Simulation Predictions for 250,000 pounds Buff Force with Cars it May be Coupled to in S-2043 Operation**

Criterion	Limiting Value	Cask Car-Cask Car	Cask-REV	6-Axle Loco-Cask	4-Axle Loco-Cask
Maximum carbody roll angle (degree)	4.0	0.6	0.6	0.5	0.5
Maximum wheel L/V	0.80	0.52	0.52	0.50	0.43
Maximum truck side L/V	0.50	0.38	0.39	0.39	0.37
Minimum vertical wheel load (%)	25	56	58	54	56
Peak-to-peak carbody lateral acceleration (g)	1.30	0.14	0.14	0.14	0.13
Maximum carbody lateral acceleration (g)	0.75	0.13	0.14	0.14	0.14
Lateral carbody acceleration standard deviation (g)	0.13	0.03	0.03	0.03	0.03
Maximum carbody vertical acceleration (g)	0.90	0.12	0.11	0.11	0.11
Maximum vertical suspension deflection (%)	95	54	53	52	52

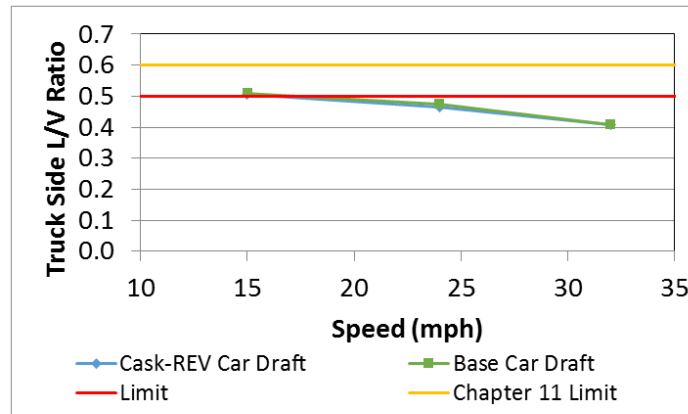

**Figure 28. Simulation Predictions of Truck Side L/V for the Buffer Railcar under 250,000 pounds Draft Force when Coupled to the Two Worst-case Cars**

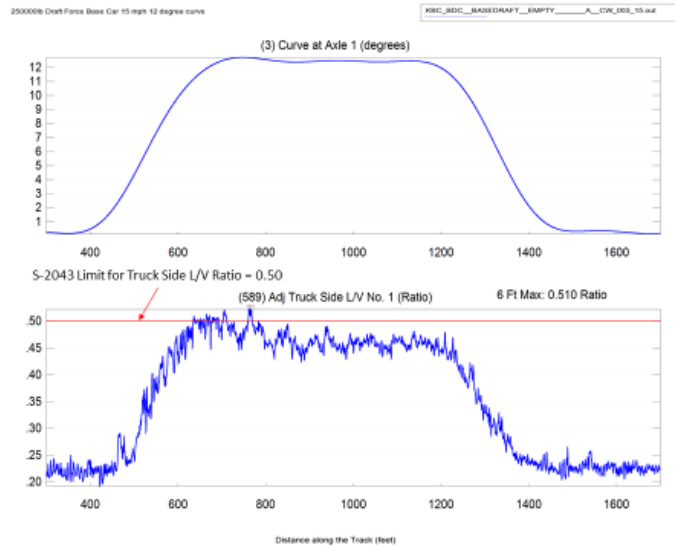

**Figure 29. Truck side L/V Ratio for the Buffer Railcar Coupled to the Base Car under 250,000 Pounds Draft Load at 15 mph**

**5.14 Braking Effects on Steering (S-2043, Paragraph 4.3.14)**

Simulations of the braking effects on steering regime were conducted according to Paragraph 4.3.14 of S-2043. Simulations were performed using measured track geometry of the 12-degree curve of the WRM loop at TTC.

The brake shoe could apply a 5,342-pound force to the wheel based on the gross rail load of 263,000 pounds and the maximum brake ratio of 16.25 percent specified in S-2043 Paragraph 4.4.2.3. “Loaded Brake Ratio.” The brake beam guide is inclined 14 degrees from horizontal on the Swing Motion® truck used on the buffer railcar. The longitudinal and vertical forces applied to the wheels were resolved from this data and applied to the axles using external force inputs in the NUCARS® model. The braking torque was calculated assuming a coefficient of friction of 0.33 between the brake shoe and wheel. This torque was applied to the axles for these simulations.

Table 26 shows the worst-case results from the braking in curves simulation. Simulation predictions meet S-2043 criteria for the braking in curves regime. Braking appears to have only a small effect on steering, with the largest detrimental change being a drop of the minimum vertical wheel load from 74 to 66 percent of the static wheel load for simulations when braking forces are simulated.

**Table 26. Simulation Predictions for the Braking in Curves Simulation**

Criterion	Limiting Value	No Braking	With Braking
Maximum carbody roll angle (degree)	4.0	0.4	0.4
Maximum wheel L/V	0.80	0.49	0.48
Maximum truck side L/V	0.50	0.30	0.31
Minimum vertical wheel load (%)	25	74	66
Peak-to-peak carbody lateral acceleration (g)	1.30	0.17	0.18
Maximum carbody lateral acceleration (g)	0.75	0.11	0.11
Lateral carbody acceleration standard deviation (g)	0.13	0.02	0.02
Maximum carbody vertical acceleration (g)	0.90	0.12	0.12
Maximum vertical suspension deflection (%)	95	34	34

**6.0 WORN COMPONENT SIMULATIONS (S-2043, Paragraph 4.3.15)**

Worn component simulations were conducted according to Paragraph 4.3.15 of S-2043. Wear of the following components was simulated:

- CCSB
- Center plates
- Primary pad
- Friction wedges
- Broken springs
- Vertical damper

In this section, worst-case simulation predictions for the worn components are summarized in tables together with the criteria and base line predictions for the new condition car. All worn component condition simulations meet S-2043 criteria.

The regimes chosen for each worn component case are not expected to identify every regime where the worn component may affect results; but rather, represent a set of cases that check the modes of performance that might be affected. The regimes used in worn component simulations were selected from those required by Chapter 11. For example, simulations of the effects of truck component wear in turnouts, crossovers, spiral entry/exit and curves with bumps/dips were not performed because these effects would also be evident in the regimes of curving and dynamic curving.

**6.1 Constant Contact Side Bearing (CCSB)**

Wear in a CCSB may result in a loss of side bearing preload. Wear of the carbody centerplate or the truck center bowl may result in a reduction of the CCSB setup height. To examine the effect of these types of CCSB wear, simulations were performed with:

- The CCSB having half the stiffness and half the preload of new CCSB (4,000-pound nominal preload).
- The setup height of the new CCSB reduced to 4 7/8 inch.

The performance of the car with worn CCSB was checked in constant curving, dynamic curving, hunting, and twist and roll.

Table 27 shows a comparison of constant curving simulation predictions for baseline and worn CCSB simulations. Simulations were performed in both directions using track geometry measurements for a section of track that includes 7.5-, 12-, and 10-degree curves and their entry and exit spirals. The spiral on the north end of the 12-degree curve is an old test zone known as the bunched spiral. The curvature changes linearly from 0 to 12 degrees over the 200-foot length of the bunched spiral and the superelevation changes from 0 to 5 inches in the center 100 feet. The bunched spiral is no longer a required AAR test regime, but serves in this case to check car performance under severe track twist conditions. Simulation predictions for worn CCSB meet S-2043 criteria for constant curving.

**Table 27. Simulation Predictions of the Buffer Railcar with Worn CCSB in Constant Curving**

Criterion	Limiting Value	Baseline	Low Preload CCSB	Low Setup Height CCSB
Maximum carbody roll angle (degree)	4.0	0.5	0.5	0.5
Maximum wheel L/V	0.80	0.52	0.52	0.52
Maximum truck side L/V	0.50	0.34	0.34	0.34
Minimum vertical wheel load (%)	25	68	67	68
Peak-to-peak carbody lateral acceleration (g)	1.30	0.24	0.23	0.23
Maximum carbody lateral acceleration (g)	0.75	0.16	0.15	0.15
Lateral carbody acceleration standard deviation (g)	0.13	0.04	0.04	0.04
Maximum carbody vertical acceleration (g)	0.90	0.15	0.15	0.15
Maximum vertical suspension deflection (%)	95	37	37	36

Table 28 shows a comparison of dynamic curving simulation predictions for baseline and worn CCSB simulations. Simulation predictions for worn CCSB meet S-2043 criteria for dynamic curving.

**Table 28. Simulation Predictions of the Buffer Railcar with Worn CCSB in Dynamic Curving**

Criterion	Limiting Value	Baseline	Low Preload CCSB	Low Setup Height CCSB
Maximum carbody roll angle (degree)	4.0	1.0	1.0	1.0
Maximum wheel L/V	0.80	0.53	0.53	0.53
Maximum truck side L/V	0.50	0.25	0.25	0.25
Minimum vertical wheel load (%)	25	62	62	62
Peak-to-peak carbody lateral acceleration (g)	1.30	0.41	0.41	0.41
Maximum carbody lateral acceleration (g)	0.75	0.28	0.29	0.28
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.09	0.09	0.09
Maximum vertical suspension deflection (%)	95	33	33	33

Table 29 shows a comparison of hunting simulation predictions for baseline and worn CCSB simulations. Simulation predictions for low preload and low setup height CCSB meet the S-2043 criteria for hunting.

**Table 29. Simulation Predictions of the Buffer Railcar with Worn CCSB in Hunting**

Criterion	Limiting Value	Baseline	Low Preload CCSB	Low Setup Height CCSB
Maximum carbody roll angle (degree)	4.0	0.4	0.4	0.3
Maximum wheel L/V	0.80	0.21	0.22	0.21
Maximum truck side L/V	0.50	0.19	0.19	0.19
Minimum vertical wheel load (%)	25	66	66	66
Peak-to-peak carbody lateral acceleration (g)	1.30	0.40	0.40	0.40
Maximum carbody lateral acceleration (g)	0.75	0.29	0.29	0.29
Lateral carbody acceleration standard deviation (g)	0.13	0.09	0.08	0.08
Maximum carbody vertical acceleration (g)	0.90	0.24	0.24	0.24
Maximum vertical suspension deflection (%)	95	31	31	31

Table 30 shows a comparison of twist and roll simulation predictions for baseline and worn CCSB simulations. Simulation predictions for worn CCSB meet S-2043 criteria for twist and roll.

**Table 30. Simulation Predictions of the Buffer Railcar with Worn CCSB in Twist and Roll**

Criterion	Limiting Value	Baseline	Low Preload CCSB	Low Setup Height CCSB
Maximum carbody roll angle (degree)	4.0	1.6	1.6	1.6
Maximum wheel L/V	0.80	0.11	0.11	0.11
Maximum truck side L/V	0.50	0.09	0.09	0.09
Minimum vertical wheel load (%)	25	69	69	70
Peak-to-peak carbody lateral acceleration (g)	1.30	0.27	0.27	0.27
Maximum carbody lateral acceleration (g)	0.75	0.15	0.15	0.14
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.16	0.16	0.16
Maximum vertical suspension deflection (%)	95	40	41	40

## 6.2 Centerplate

To examine the effect of centerplate wear, simulations were performed with centerplate friction increased from 0.3 for the baseline case to 0.5 for the worn case. The performance of the car with worn centerplates was checked in constant curving, dynamic curving, and hunting.

Table 31 shows a comparison of constant curving simulation predictions for baseline and worn centerplate simulations. Simulations were performed in both directions using track geometry measurements for a section of track that includes a 7.5-, 12-, and 10-degree curve and their entry and exit spirals. The bunched spiral, as described in the previous section, was used.

**Table 31. Simulation Predictions of the Buffer Railcar with Worn Centerplate in Constant Curving**

Criterion	Limiting Value	Baseline	Worn Centerplate
Maximum carbody roll angle (degree)	4.0	0.5	0.5
Maximum wheel L/V	0.80	0.52	0.52
Maximum truck side L/V	0.50	0.34	0.34
Minimum vertical wheel load (%)	25	68	68
Peak-to-peak carbody lateral acceleration (g)	1.30	0.24	0.24
Maximum carbody lateral acceleration (g)	0.75	0.16	0.15
Lateral carbody acceleration standard deviation (g)	0.13	0.04	0.04
Maximum carbody vertical acceleration (g)	0.90	0.15	0.15
Maximum vertical suspension deflection (%)	95	37	37

Table 32 shows a comparison of dynamic curving simulation predictions for baseline and worn centerplate simulations. Simulation predictions for worn centerplate meet S-2043 criteria for dynamic curving.

**Table 32. Simulation Predictions of the Buffer Railcar with Worn Centerplate in Dynamic Curving**

Criterion	Limiting Value	Baseline	Worn Centerplate
Maximum carbody roll angle (degree)	4.0	1.0	1.0
Maximum wheel L/V	0.80	0.53	0.52
Maximum truck side L/V	0.50	0.25	0.25
Minimum vertical wheel load (%)	25	62	62
Peak-to-peak carbody lateral acceleration (g)	1.30	0.41	0.41
Maximum carbody lateral acceleration (g)	0.75	0.28	0.28
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.09	0.09
Maximum vertical suspension deflection (%)	95	33	33

Table 33 shows a comparison of hunting simulation predictions for baseline and worn centerplate simulations. Simulation predictions for these conditions meet S-2043 criteria for hunting.

**Table 33. Simulation Predictions of the Buffer Railcar with Worn Centerplate in Hunting**

Criterion	Limiting Value	Baseline	Worn Centerplate
Maximum carbody roll angle (degree)	4.0	0.4	0.3
Maximum wheel L/V	0.80	0.21	0.21
Maximum truck side L/V	0.50	0.19	0.19
Minimum vertical wheel load (%)	25	66	66
Peak-to-peak carbody lateral acceleration (g)	1.30	0.40	0.40
Maximum carbody lateral acceleration (g)	0.75	0.29	0.29
Lateral carbody acceleration standard deviation (g)	0.13	0.09	0.08
Maximum carbody vertical acceleration (g)	0.90	0.24	0.24
Maximum vertical suspension deflection (%)	95	31	31

### 6.3 Primary Pad

It is not clear how the primary pads of the Swing Motion® trucks will wear over time. To examine the possible impact of different changes, the primary pads were simulated with both lower and higher longitudinal and lateral stiffness. For lower stiffness runs the stiffness was reduced by a factor of 2. For higher stiffness runs the stiffness was increased by a factor of 20.

Table 34 shows a comparison of constant curving simulation predictions for baseline and worn primary pad simulations. Simulations were performed in both directions using track geometry measurements for a section of track that includes a 7.5-, 12-, and 10-degree curve and their entry and exit spirals. The bunched spiral, as described in the previous section, was used. Simulation predictions for worn primary pads meet S-2043 criteria for constant curving.

**Table 34. Simulation Predictions of the Buffer Railcar with Worn Primary Pads in Constant Curving**

Criterion	Limiting Value	Baseline	Soft Primary Pad	Stiff Primary Pad
Maximum carbody roll angle (degree)	4.0	0.5	0.5	0.5
Maximum wheel L/V	0.80	0.52	0.52	0.62
Maximum truck side L/V	0.50	0.34	0.28	0.36
Minimum vertical wheel load (%)	25	68	67	67
Peak-to-peak carbody lateral acceleration (g)	1.30	0.24	0.25	0.19
Maximum carbody lateral acceleration (g)	0.75	0.16	0.19	0.17
Lateral carbody acceleration standard deviation (g)	0.13	0.04	0.05	0.04
Maximum carbody vertical acceleration (g)	0.90	0.15	0.15	0.14
Maximum vertical suspension deflection (%)	95	37	36	37

Table 35 shows a comparison of dynamic curving simulation predictions for baseline and worn primary pad simulations. Simulation predictions for worn primary pads meet S-2043 criteria for dynamic curving.

**Table 35. Simulation Predictions of the Buffer Railcar with Worn Primary Pads in Dynamic Curving**

Criterion	Limiting Value	Baseline	Soft Primary Pad	Stiff Primary Pad
Maximum carbody roll angle (degree)	4.0	1.0	1.0	1.0
Maximum wheel L/V	0.80	0.53	0.53	0.58
Maximum truck side L/V	0.50	0.25	0.23	0.32
Minimum vertical wheel load (%)	25	62	62	62
Peak-to-peak carbody lateral acceleration (g)	1.30	0.41	0.59	0.25
Maximum carbody lateral acceleration (g)	0.75	0.28	0.44	0.20
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.09	0.09	0.09
Maximum vertical suspension deflection (%)	95	33	34	32

Table 36 shows a comparison of hunting simulation predictions for baseline and worn primary pad simulations. Simulation predictions for worn primary pads meet S-2043 criteria for hunting.

**Table 36. Simulation Predictions of the Buffer Railcar with Worn Primary Pads in Hunting**

Criterion	Limiting Value	Baseline	Soft Primary Pad	Stiff Primary Pad
Maximum carbody roll angle (degree)	4.0	0.4	0.3	0.4
Maximum wheel L/V	0.80	0.21	0.22	0.27
Maximum truck side L/V	0.50	0.19	0.20	0.19
Minimum vertical wheel load (%)	25	66	65	65
Peak-to-peak carbody lateral acceleration (g)	1.30	0.40	0.43	0.36
Maximum carbody lateral acceleration (g)	0.75	0.29	0.32	0.27
Lateral carbody acceleration standard deviation (g)	0.13	0.09	0.08	0.07
Maximum carbody vertical acceleration (g)	0.90	0.24	0.24	0.25
Maximum vertical suspension deflection (%)	95	31	32	30

#### 6.4 Friction Wedges

The wedge rise limit for the Swing Motion® trucks used in the buffer railcar is 1 1/16 inch. Worn wedge simulations were performed with the wedges at this state of wear in all locations. The worn wedge condition was checked for limiting spiral, dynamic curving, pitch and bounce, and twist and roll regimes.

Table 37 shows a comparison of limiting spiral simulation predictions for baseline and worn wedge simulations. Simulation predictions for worn wedges meet S-2043 criteria in the limiting spiral regime.

**Table 37. Simulation Predictions of the Buffer Railcar with Worn Wedges in Limiting Spiral**

Criterion	Limiting Value	Baseline Spiral Entry	Baseline Spiral Exit	Worn Wedge Spiral Entry	Worn Wedge Spiral Exit
Maximum carbody roll angle (degree)	4.0	0.6	0.7	0.5	0.7
Maximum wheel L/V	0.80	0.42	0.51	0.42	0.51
Maximum truck side L/V	0.50	0.23	0.29	0.23	0.29
Minimum vertical wheel load (%)	25	67	64	68	64
Peak-to-peak carbody lateral acceleration (g)	1.30	0.14	0.20	0.13	0.19
Maximum carbody lateral acceleration (g)	0.75	0.10	0.15	0.10	0.15
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.10	0.10	0.09	0.10
Maximum vertical suspension deflection (%)	95	36	39	36	38

Table 38 shows a comparison of dynamic curving simulation predictions for baseline and worn friction wedge simulations. Simulation predictions for worn friction wedges meet S-2043 criteria for dynamic curving.

**Table 38 Simulation Predictions of the Buffer Railcar with Worn Wedges in Dynamic Curving**

Criterion	Limiting Value	Baseline	Worn Wedges
Maximum carbody roll angle (degree)	4.0	1.0	1.0
Maximum wheel L/V	0.80	0.53	0.52
Maximum truck side L/V	0.50	0.25	0.25
Minimum vertical wheel load (%)	25	62	63
Peak-to-peak carbody lateral acceleration (g)	1.30	0.41	0.47
Maximum carbody lateral acceleration (g)	0.75	0.28	0.33
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.09	0.08
Maximum vertical suspension deflection (%)	95	33	33

Table 39 shows a comparison of pitch and bounce simulation predictions for baseline and worn friction wedge simulations. Simulation predictions for worn friction wedges meet S-2043 criteria for pitch and bounce.

**Table 39. Simulation Predictions of the Buffer Railcar with Worn Friction Wedges in Pitch and Bounce**

Criterion	Limiting Value	Baseline	Worn Wedges
Maximum carbody roll angle (degree)	4.0	0.2	0.2
Maximum wheel L/V	0.80	0.06	0.05
Maximum truck side L/V	0.50	0.05	0.05
Minimum vertical wheel load (%)	25	60	59
Peak-to-peak carbody lateral acceleration (g)	1.30	0.12	0.11
Maximum carbody lateral acceleration (g)	0.75	0.06	0.06
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.65	0.67
Maximum vertical suspension deflection (%)	95	74	79

Table 40 shows a comparison of twist and roll simulation predictions for baseline and worn friction wedges. Simulation predictions for worn friction wedges meet S-2043 criteria for twist and roll.

**Table 40. Simulation Predictions of the Buffer Railcar with Worn Wedges in Twist and Roll**

Criterion	Limiting Value	Baseline	Worn Wedges
Maximum carbody roll angle (degree)	4.0	1.6	1.6
Maximum wheel L/V	0.80	0.11	0.11
Maximum truck side L/V	0.50	0.09	0.09
Minimum vertical wheel load (%)	25	69	70
Peak-to-peak carbody lateral acceleration (g)	1.30	0.27	0.27
Maximum carbody lateral acceleration (g)	0.75	0.15	0.14
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.16	0.15
Maximum vertical suspension deflection (%)	95	40	41

## 6.5 Broken Spring

The buffer railcar uses four D7 outer springs, four D7 inner springs, four D6A inner-inner springs, and two 49427-1 load carrying control coils. The broken spring simulations were done with one D7 outer spring removed from the lead left spring nest to represent a broken or missing spring. The broken spring condition was checked for limiting spiral, dynamic curving, pitch and bounce, and twist and roll.

Table 41 shows a comparison of limiting spiral simulation predictions for baseline and broken spring simulations. Simulation predictions for broken spring meet S-2043 criteria in the limiting spiral regime.

**Table 41. Simulation Predictions of the Buffer Railcar with Broken Spring in Limiting Spiral**

Criterion	Limiting Value	Baseline Spiral Entry	Baseline Spiral Exit	Broken Spring Spiral Entry	Broken Spring Spiral Exit
Maximum carbody roll angle (degree)	4.0	0.6	0.7	0.6	0.7
Maximum wheel L/V	0.80	0.42	0.51	0.41	0.53
Maximum truck side L/V	0.50	0.23	0.29	0.23	0.29
Minimum vertical wheel load (%)	25	67	64	67	63
Peak-to-peak carbody lateral acceleration (g)	1.30	0.14	0.20	0.14	0.20
Maximum carbody lateral acceleration (g)	0.75	0.10	0.15	0.10	0.15
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.10	0.10	0.10	0.10
Maximum vertical suspension deflection (%)	95	36	39	36	40

Table 42 shows a comparison of dynamic curving simulation predictions for baseline and broken spring simulations. Simulation predictions for broken springs meet S-2043 criteria in the dynamic curving regime.

**Table 42. Simulation Predictions of the Buffer Railcar with Broken Spring in Dynamic Curving**

Criterion	Limiting Value	Baseline	Broken spring
Maximum carbody roll angle (degree)	4.0	1.0	1.0
Maximum wheel L/V	0.80	0.53	0.55
Maximum truck side L/V	0.50	0.25	0.25
Minimum vertical wheel load (%)	25	62	61
Peak-to-peak carbody lateral acceleration (g)	1.30	0.41	0.41
Maximum carbody lateral acceleration (g)	0.75	0.28	0.29
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.09	0.09
Maximum vertical suspension deflection (%)	95	33	49

Table 43 shows a comparison of pitch and bounce simulation predictions for baseline and broken spring simulations. Simulation predictions for broken springs meet S-2043 criteria in the pitch and bounce regime.

**Table 43. Simulation Predictions of the Buffer Railcar with a Broken Spring in Pitch and Bounce**

Criterion	Limiting Value	Baseline	Broken spring
Maximum carbody roll angle (degree)	4.0	0.2	0.2
Maximum wheel L/V	0.80	0.06	0.05
Maximum truck side L/V	0.50	0.05	0.05
Minimum vertical wheel load (%)	25	60	58
Peak-to-peak carbody lateral acceleration (g)	1.30	0.12	0.12
Maximum carbody lateral acceleration (g)	0.75	0.06	0.07
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.65	0.65
Maximum vertical suspension deflection (%)	95	74	78

Table 44 shows a comparison of twist and roll simulation predictions for baseline and broken spring. Simulation predictions for broken springs meet S-2043 criteria for the twist and roll regime.

**Table 44. Simulation Predictions of the Buffer Railcar with Broken Spring in Twist and Roll**

Criterion	Limiting Value	Baseline	Broken spring
Maximum carbody roll angle (degree)	4.0	1.6	1.6
Maximum wheel L/V	0.80	0.11	0.12
Maximum truck side L/V	0.50	0.09	0.09
Minimum vertical wheel load (%)	25	69	70
Peak-to-peak carbody lateral acceleration (g)	1.30	0.27	0.27
Maximum carbody lateral acceleration (g)	0.75	0.15	0.15
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.16	0.15
Maximum vertical suspension deflection (%)	95	40	53

## 6.6 Worn Vertical Dampers

The buffer railcar uses four hydraulic vertical dampers. The worn vertical damper cases were modeled with one-half the damping rate of a new damper. The worn characteristic was applied at all four dampers. The worn damper condition was checked for limiting spiral, dynamic curving, pitch and bounce, and twist and roll regimes.

Table 45 shows a comparison of limiting spiral simulation predictions for baseline and worn vertical damper simulations. Simulation predictions for worn vertical dampers meet S-2043 criteria in the limiting spiral regime.

**Table 45. Simulation Predictions of the Buffer Railcar with Worn Vertical Dampers in Limiting Spiral**

Criterion	Limiting Value	Baseline Spiral Entry	Baseline Spiral Exit	Worn Dampers Spiral Entry	Worn Dampers Spiral Exit
Maximum carbody roll angle (degree)	4.0	0.6	0.7	0.6	0.7
Maximum wheel L/V	0.80	0.42	0.51	0.43	0.51
Maximum truck side L/V	0.50	0.23	0.29	0.24	0.29
Minimum vertical wheel load (%)	25	67	64	68	64
Peak-to-peak carbody lateral acceleration (g)	1.30	0.14	0.20	0.14	0.19
Maximum carbody lateral acceleration (g)	0.75	0.10	0.15	0.10	0.15
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.10	0.10	0.09	0.10
Maximum vertical suspension deflection (%)	95	36	39	36	39

Table 46 shows a comparison of dynamic curving simulation predictions for baseline and worn damper simulations. Simulation predictions for worn dampers meet S-2043 criteria for the dynamic curving regime.

**Table 46. Simulation Predictions of the Buffer Railcar with Worn Dampers in Dynamic Curving**

Criterion	Limiting Value	Baseline	Worn dampers
Maximum carbody roll angle (degree)	4.0	1.0	1.0
Maximum wheel L/V	0.80	0.53	0.53
Maximum truck side L/V	0.50	0.25	0.25
Minimum vertical wheel load (%)	25	62	62
Peak-to-peak carbody lateral acceleration (g)	1.30	0.41	0.41
Maximum carbody lateral acceleration (g)	0.75	0.28	0.28
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.09	0.09
Maximum vertical suspension deflection (%)	95	33	33

Table 47 shows a comparison of pitch and bounce simulation predictions for baseline and worn damper simulations. Simulation predictions for worn dampers meet the S-2043 criteria for the pitch and bounce regime.

**Table 47. Simulation Predictions of the Buffer Railcar with Worn Vertical Dampers in Pitch and Bounce**

Criterion	Limiting Value	Baseline	Worn dampers
Maximum carbody roll angle (degree)	4.0	0.2	0.2
Maximum wheel L/V	0.80	0.06	0.05
Maximum truck side L/V	0.50	0.05	0.05
Minimum vertical wheel load (%)	25	60	56
Peak-to-peak carbody lateral acceleration (g)	1.30	0.12	0.12
Maximum carbody lateral acceleration (g)	0.75	0.06	0.06
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.65	0.76
Maximum vertical suspension deflection (%)	95	74	94


Table 48 shows a comparison of twist and roll simulation predictions for baseline and worn damper simulations. Simulation predictions for worn dampers meet S-2043 criteria for twist and roll regime.

**Table 48. Simulation Predictions of the Buffer Railcar with Worn Dampers in Twist and Roll**

Criterion	Limiting Value	Baseline	Worn dampers
Maximum carbody roll angle (degree)	4.0	1.6	1.8
Maximum wheel L/V	0.80	0.11	0.12
Maximum truck side L/V	0.50	0.09	0.09
Minimum vertical wheel load (%)	25	69	69
Peak-to-peak carbody lateral acceleration (g)	1.30	0.27	0.27
Maximum carbody lateral acceleration (g)	0.75	0.15	0.15
Lateral carbody acceleration standard deviation (g)	0.13	NA	NA
Maximum carbody vertical acceleration (g)	0.90	0.16	0.14
Maximum vertical suspension deflection (%)	95	40	48

## 7.0 OBSERVATIONS AND CONCLUSIONS

The buffer railcar met S-2043 criteria for all S-2043 regimes except the truck side L/V criterion in buff and draft curving. The cases that did not meet were 250,000 pound draft load cases when the car was coupled between two base cars, or when coupled between the Atlas Cask car and the REV and traveling at 15 mph. The truck side L/V ratio for both of these cases was 0.51. The S-2043 criterion for truck side L/V ratio is 0.50 and the corresponding AAR Chapter 11 criterion is 0.60

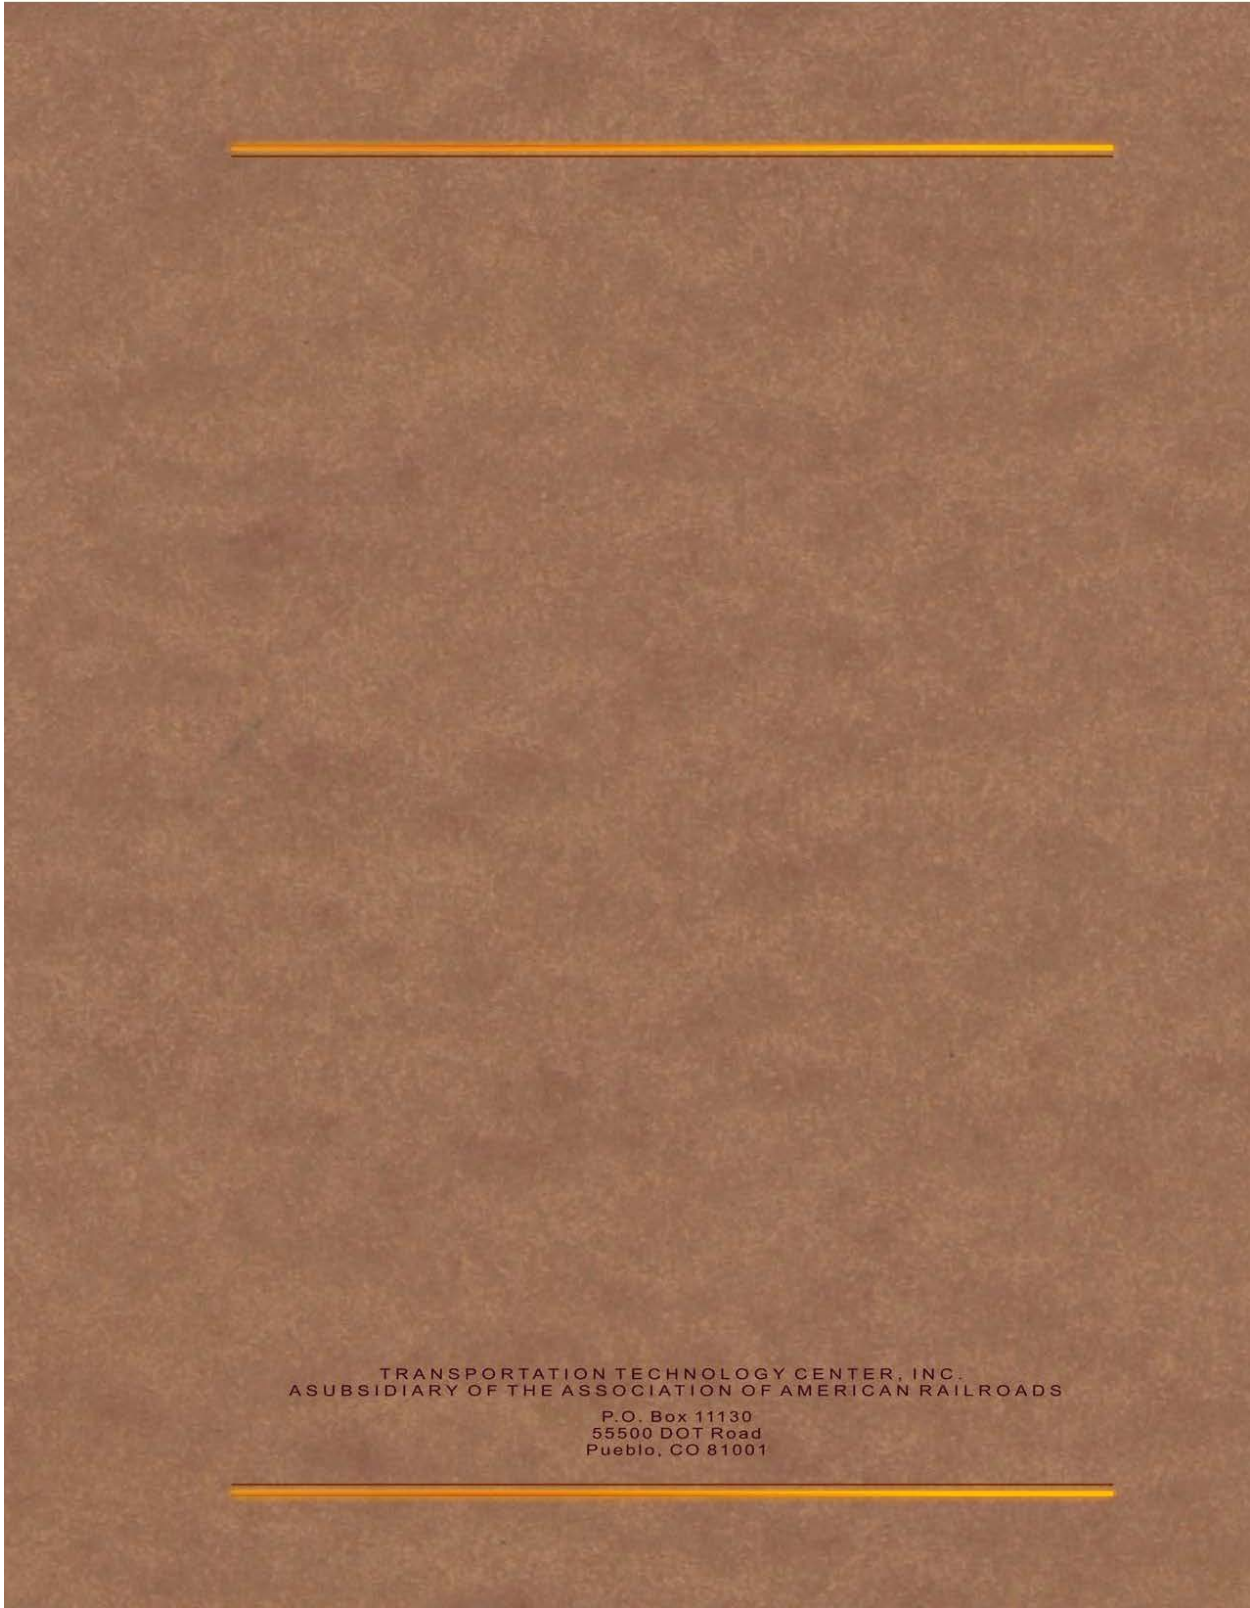

**APPENDIX H-8  
AAR EEC NOTICE TO PROCEED  
TO TEST PHASE FOR BUFFER RAILCAR**

**Ron Hynes**  
Assistant Vice President  
Technical Services



**Nichole Fimple**  
Executive Director  
Rules and Standards

February 2, 2018  
File 209.240

Subject: AAR Standard S-2043 Initial Design Approval of the Kasgro/AREVA Department of Energy (DOE) High Level Radioactive Material (HLRM) Buffer Car

Mr. Rick Ford  
AVP Mechanical & Utilization  
Kasgro Rail Corporation  
121 Rundle Road  
New Castle, PA 16102

Dear Mr. Ford:


The AAR Equipment Engineering Committee (EEC) has completed the S-2043 Initial Review of the DOE HLRM Buffer Car. The initial design is hereby approved, and all parties involved are notified to proceed with the test requirements of S-2043. Approval was based on completion of the following requirements:

- Structural Analysis
- Nonstructural Static Analysis
- Dynamic Analysis
- Brake System Design
- Railcar Clearance and Weight

There was no mention of System Safety Monitoring in the submission, but EEC understands that this item will be addressed as the Multiple Car Test phase approaches.

If you have any questions or need additional information, please contact Mr. Jon Hannafious of our Transportation Technology Center, Inc., subsidiary at [jon\\_hannafious@aar.com](mailto:jon_hannafious@aar.com) or (719) 584-0682.

Sincerely,



Nichole Fimple

NF/jsh

cc: David Cackovic  
Mark Denton, AREVA  
Equipment Engineering Committee